EVIDENCE ATLAS / V2.1

CENTENNIAL JINGZHANG AI INNOVATION BELT

FROM URBAN DIAGNOSIS TO AUDITABLE DESIGN

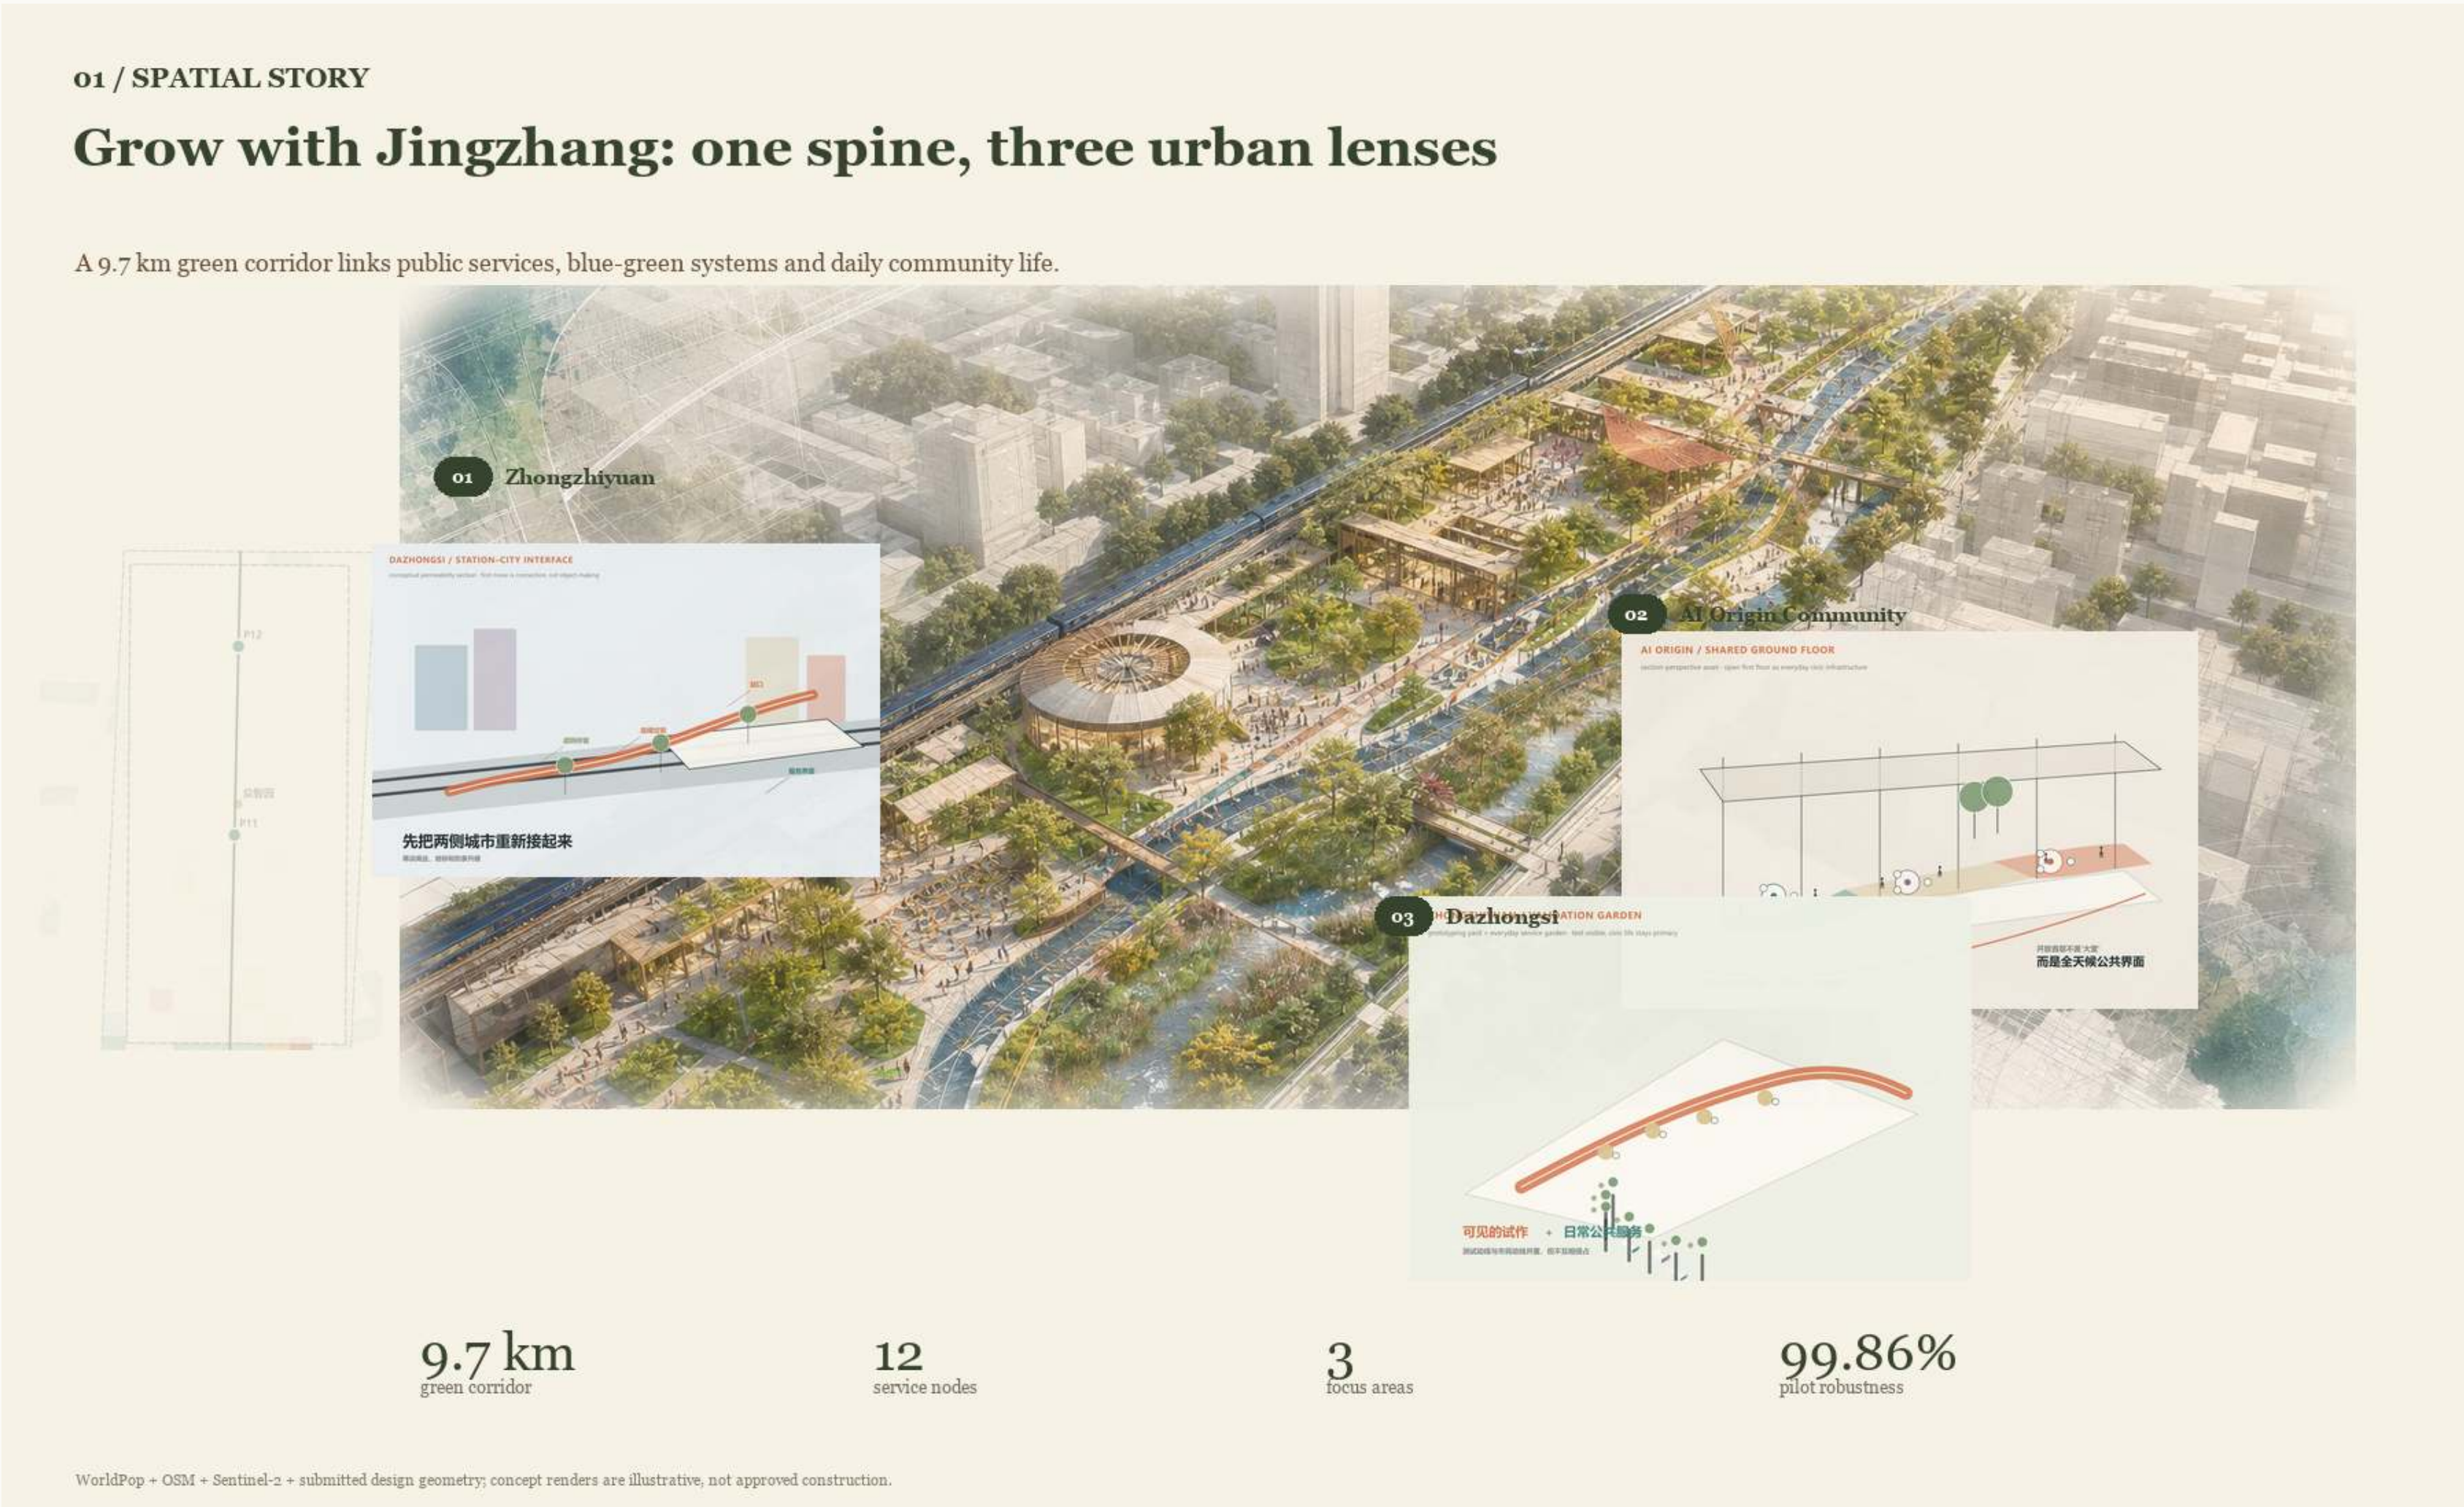

11.41 km²
provisional overall-design base

192.6k
WorldPop modelled population

17.9%
population with ≥1 service gap

61.9%
V2 consensus gap1 coverage

Existing Evidence and Overall Spatial Structure

One evidence base constrains both diagnosis and concept design

WorldPop modelled population, OSM walk network, robust opportunity and promoted V2 geometry are shown together.

Robust Opportunity without a Single Arbitrary Weighting

Seven percentile-normalized dimensions + 5,000 weight samples

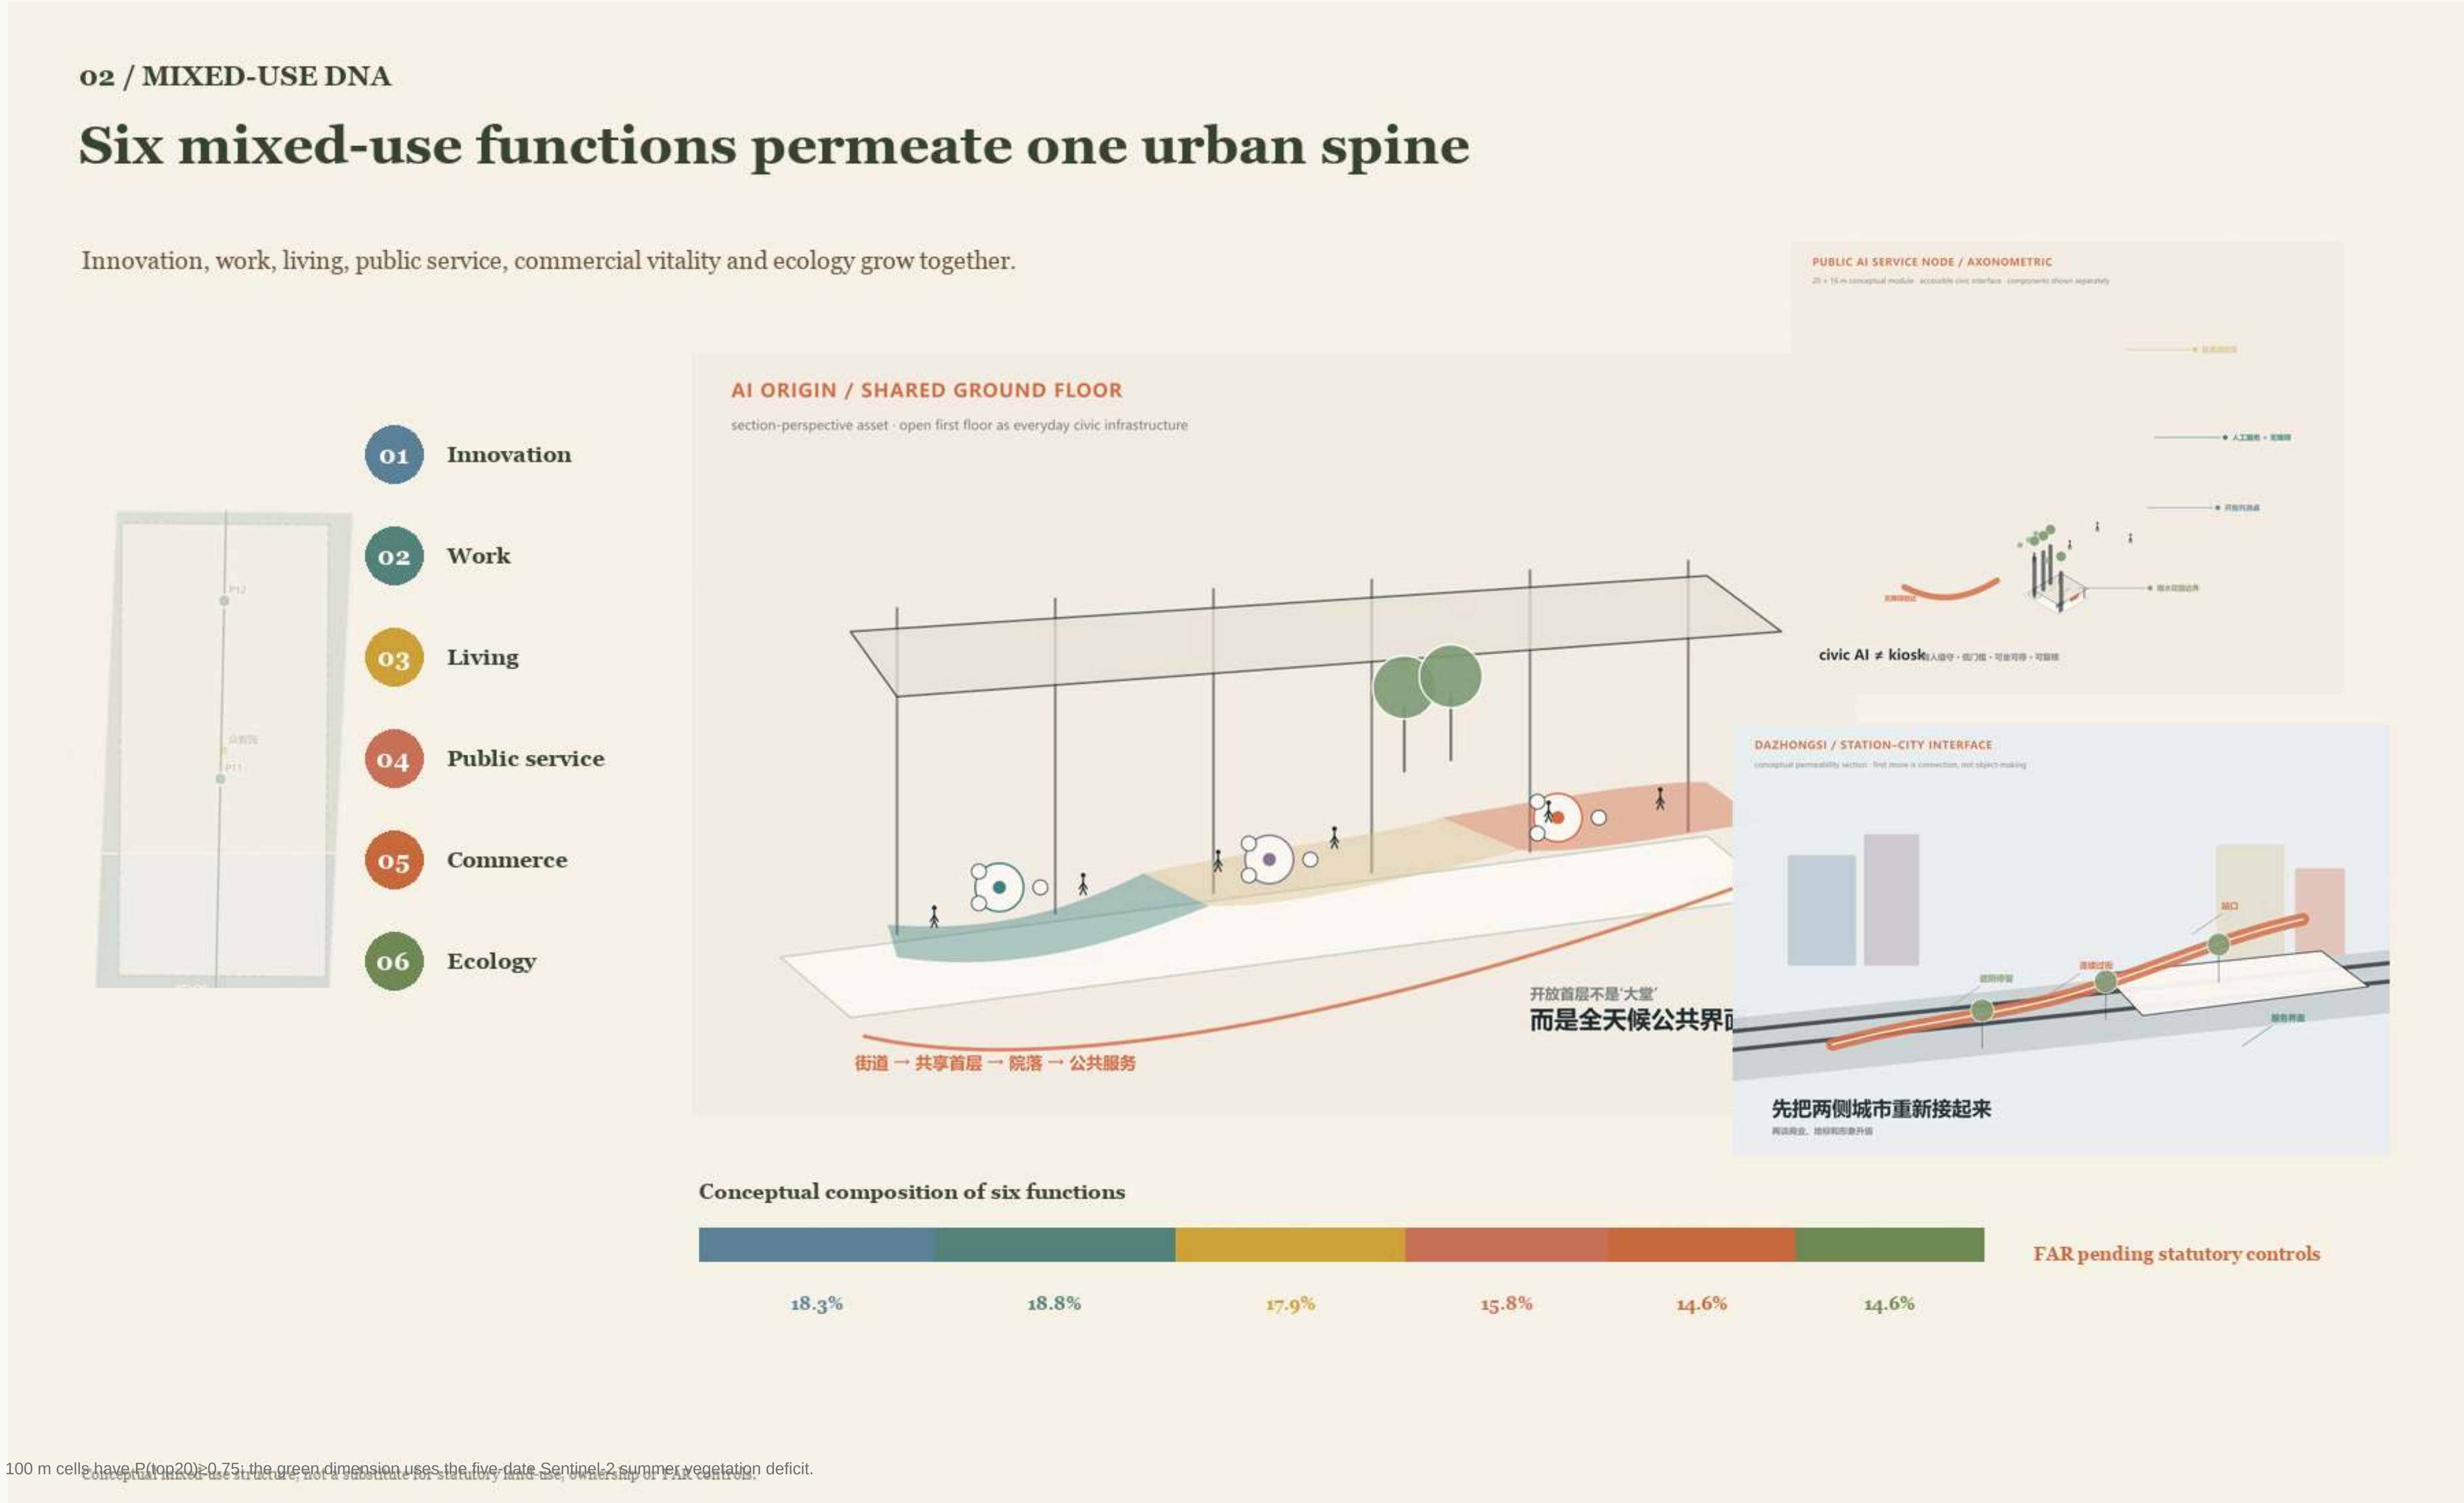

In Sentinel v0.4, 37 100 m cells have P(top20)≥0.75; the green dimension uses the five-date Sentinel-2 summer vegetation deficit.

The Three Key Areas Require Different Diagnoses

Population-weighted mobility, health and service gaps define the first move

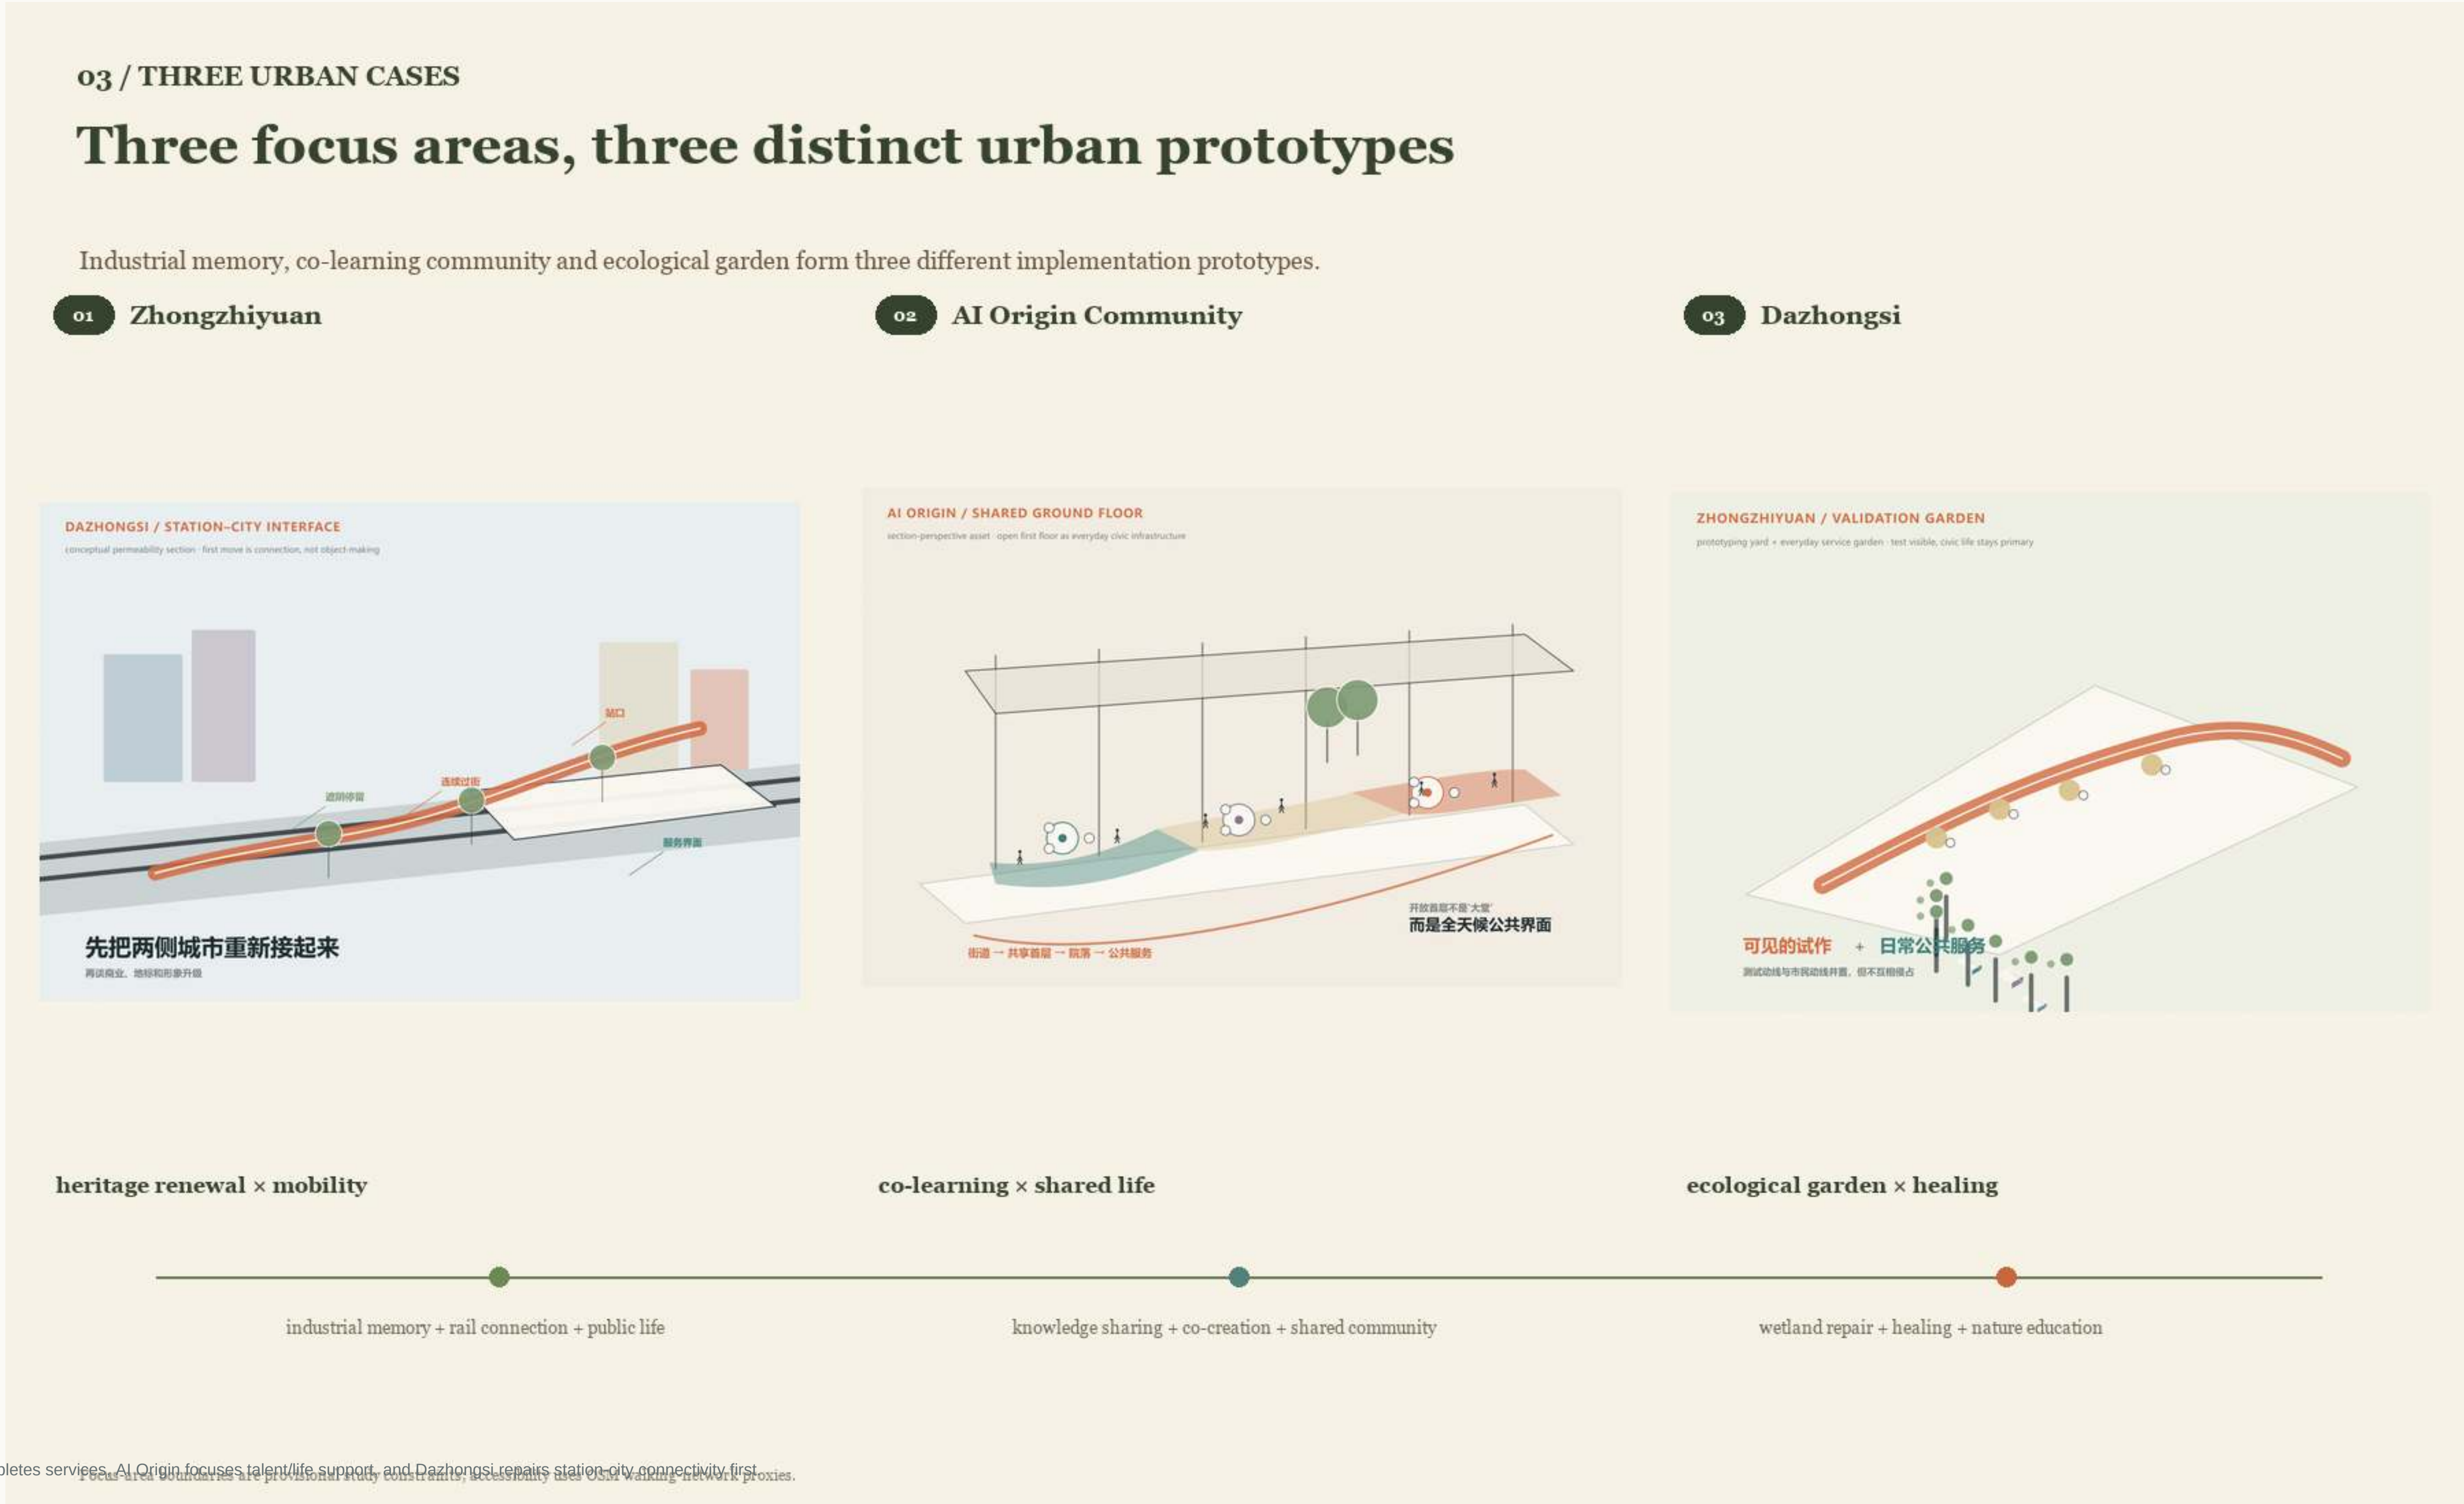

Zhongzhiyuan completes services, AI Origin focuses talent/life support, and Dazhongsi repairs station-city connectivity first.

Why the One-kilometre Pilot Starts on the Dazhongsi Side

36 sliding windows + 5,000 weight samples

In Sentinel v0.4, CORRIDOR-04 remains rank 1; P(top20)=99.86% and P(top10)=98.6%; 03/05 define alignment tolerance.

Twelve Nodes: From Priori Locations to Multi-objective Consensus

Retain eight centers and replace four low-performing slots with consensus sites

05 / EVIDENCE CONTRACT

From baseline to design, impact and acceptance: one evidence chain

Model population, service gaps, robustness and implementation triggers are converted into testable commitments.

PUBLIC AI SERVICE NODE / AXONOMETRIC

20 × 16 m conceptual module · accessible civic interface · components shown separately

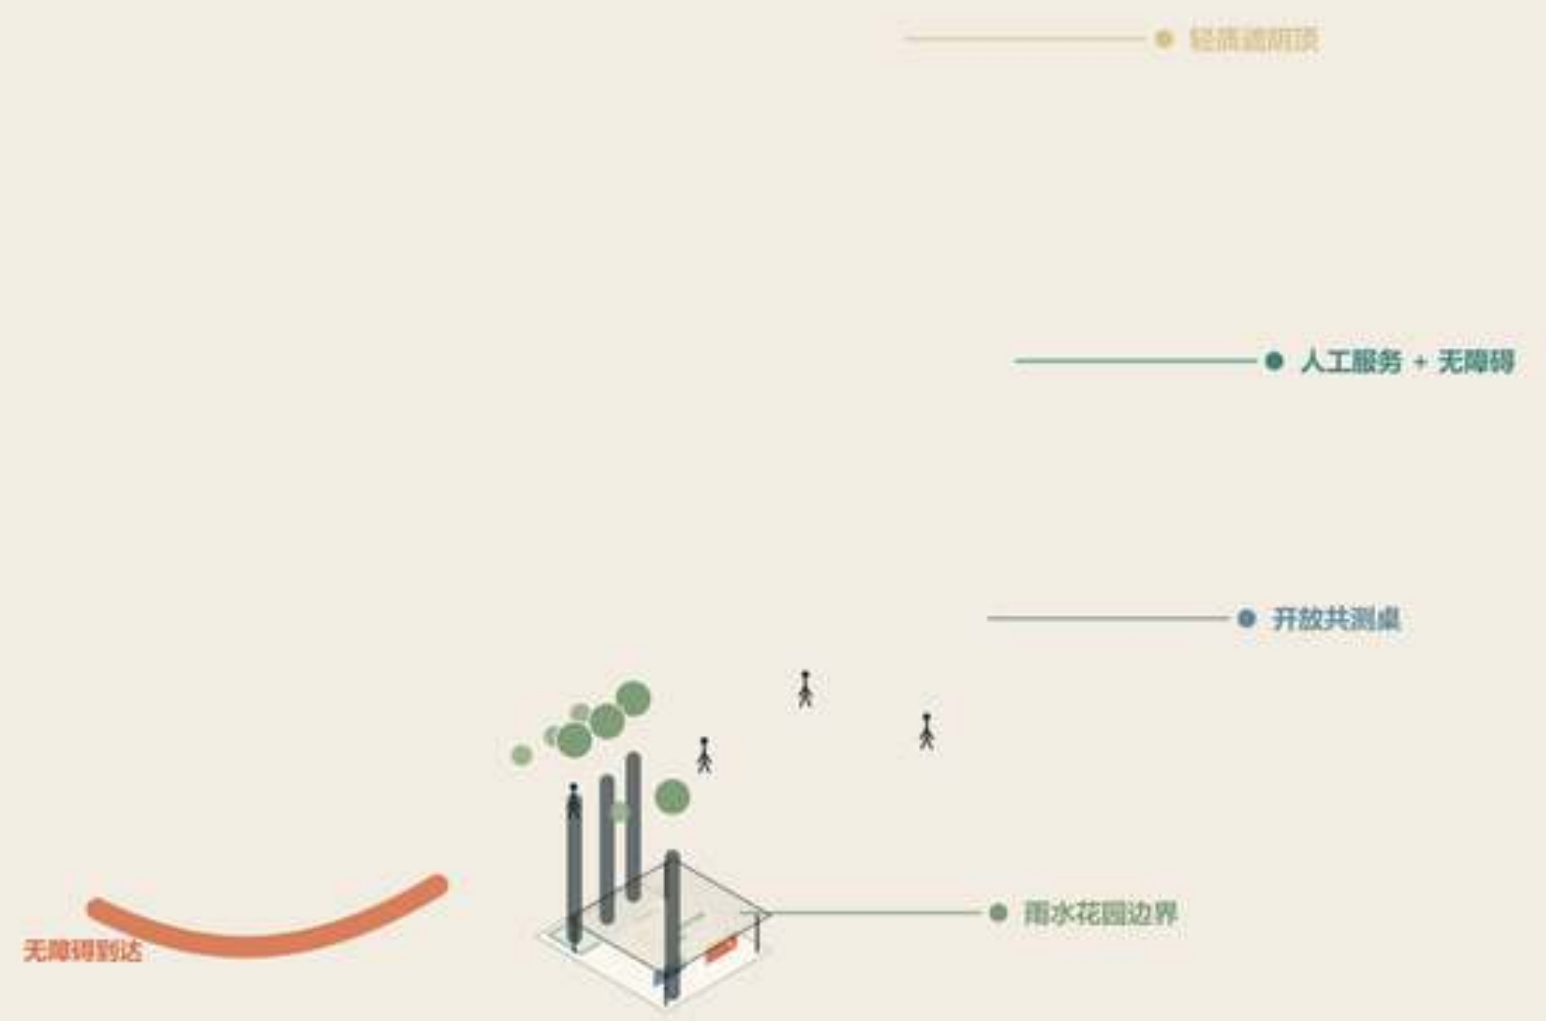

civic AI ≠ kiosk 有人值守 · 低门槛 · 可坐可停 · 可复核

Sustainable park hub · public AI service node

01 Baseline — 02 Design — 03 Impact — 04 Acceptance

192.6k	61.9%	99.86%	9
model population	V2 gap1 coverage	pilot robustness	core KPIs

Implementation triggers - any one may activate

- official redline approved
- road/land corridor confirmed
- utility conditions ready
- rail safety assessment passed
- fire access compliant
- official data refreshed
- site verification completed

Scenario impacts are model/design audit results, not built outcomes; controls become acceptance evidence only after field verification.

The full Sentinel v0.4 rerun retains the current four consensus replacements; twelve-node gap1 coverage stays at 61.9%, while the alternative gains slight opportunity intensity at the cost of population and gap1 coverage.

Overall Structure: Opportunity, Nodes and Key Areas Work Together

Concept design remains subject to formal redlines, tenure, utilities and field checks

promoted V2 geometry

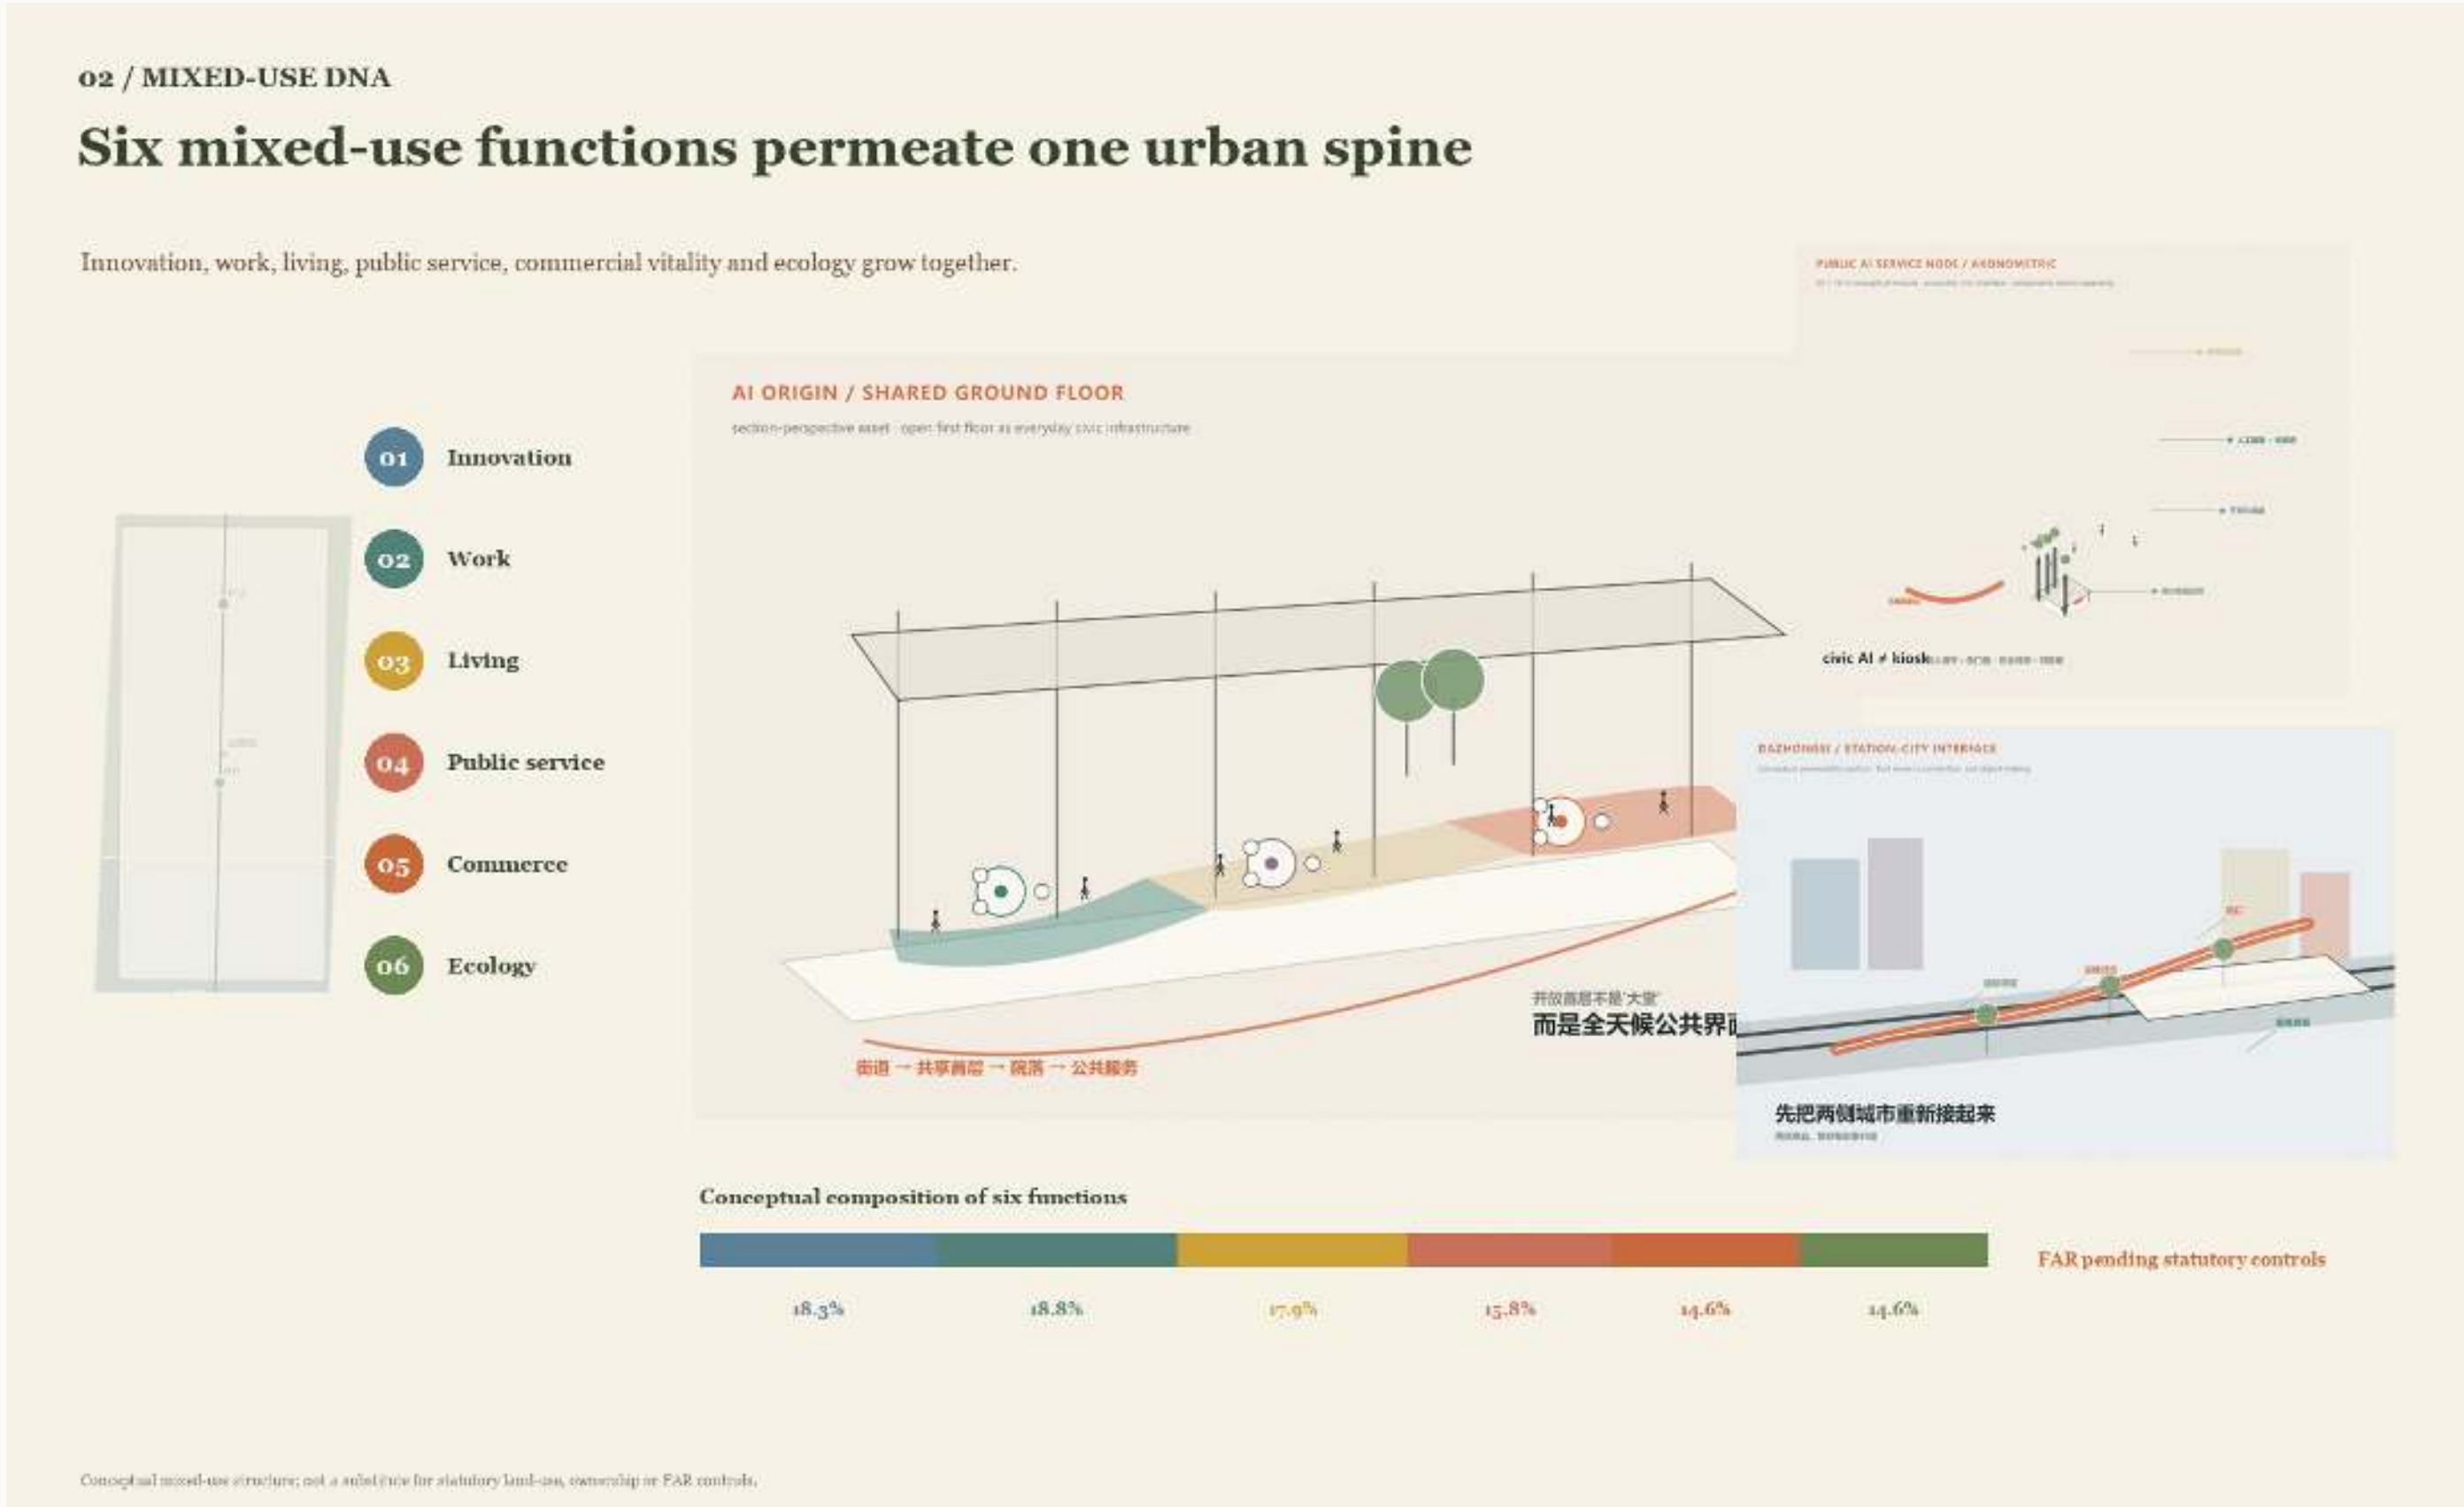

robust opportunity

Zhongzhiyuan | Couple Validation with Everyday-service Completion

The ~1.5 ha test field remains a research hypothesis but must be re-sited and checked against real service deficits.

Concept visualization / not factual evidence

22.6k
modelled population

53.0%
rail within 10 min

79.5%
health within 15 min

36.8%
gap in ≥1 service

1.94×
pedestrian detour proxy

Key-area polygons are provisional; metrics are modelled/population-weighted proxies and do not support parcel-level statutory conclusions

AI Origin | Shift the Shared Ground Floor toward Talent and Life Support

Mobility is relatively strong; the first stage should emphasize talent, family, health referral, learning/collaboration and open innovation.

Concept visualization / not factual evidence

14.9k
modelled population

86.7%
rail within 10 min

63.5%
health within 15 min

36.5%
gap in ≥1 service

1.71×
pedestrian detour proxy

Dazhongsi | Repair Station-city Connectivity before Expanding the Public Hall

Low 10-minute rail coverage, high health deficit and the largest detour proxy place connectivity ahead of the 2.4 ha public-hall expansion.

Concept visualization / not factual evidence

18.0k
modelled population

25.3%
rail within 10 min

49.6%
health within 15 min

53.6%
gap in ≥1 service

2.78×
pedestrian detour proxy

320 m² Service Node: Small, Demountable and Staffed

Total concept footprint is 3,840 m²; module size is not an approved construction area

10 / SERVICE NODE GUIDE

Public-service Node Delivery and Operations Guide

A 320 m² prototype defines site, program, staffing, utilities, acceptance and exit requirements

NODE AXONOMETRIC INTENT | 20 m × 16 m | continuous accessible loop

NODE DELIVERY + OPERATIONS

250–400 m² program range | 320 m² prototype

01 **FOOTPRINT** — 320 m²
20 m × 16 m prototype with demountable components
ACCEPT site and built-area check

02 **HUMAN SERVICE** — 24–36 m²
counter, waiting, storage and staffed position
ACCEPT hours and staffing roster

03 **MICROCLIMATE** — ≥70%
continuous shade across principal stay areas
ACCEPT summer solar study + field audit

04 **RESPONSE** — 60 s / 24 h
human acknowledgement and routine fault logging
ACCEPT monthly response + work-order log

HANDOVER + EXIT MANAGEMENT

- joint utilities, fire, access and site-permit review
- facility list, duty register and monthly inspection record
- remove equipment if operations lapse; retain basic civic amenities

The four new sites still require official-facility overlap, tenure, utilities, fire, accessibility and field checks.

node delivery integrates utilities, fire review, accessibility and operating maintenance

10

Pilot Section: Translate Accessibility into Design Controls

clear walk ≥3.0 m; two-way cycle ≥4.0 m; effective rest spacing ≤150 m

09 / TYPICAL SECTION

Typical-section Controls for the Jingzhang Pilot

A 12-m typical section addresses walking gaps, mixed traffic, limited rest and stormwater drainage

PILOT DELIVERY VIEW | accessible walk + rain garden + two-way cycling + human service

SECTION CONTROLS + ACCEPTANCE

12.0 m total | four continuous functional bands

01 **WALKING** ≥3.0 m

continuous clear width, tactile and kerb-ramp links

ACCEPT field width survey

02 **STORMWATER** ≥2.5 m

complete inflow, overflow and drainage route

ACCEPT hydraulic check + flow test

03 **CYCLING** ≥4.0 m

two-way operation with speed control at crossings

ACCEPT marking width + conflict review

04 **SERVICE EDGE** ≥2.5 m

seating, shade and staffed wayfinding

ACCEPT facility list + access audit

DELIVERY INTERFACES

- coordinate rail protection and maintenance access
- integrate street limits, utilities and existing trees
- retain physical wayfinding and human service during outages

Controls still require coordination with formal road redlines, rail safety, fire access, utilities and existing trees.

section dimensions are developed with rail safety, street limits, utilities and existing trees

0-24 Months: Near-term Packages and Delivery Sequence

Break design moves into reviewable, reversible and annually evaluated delivery packages

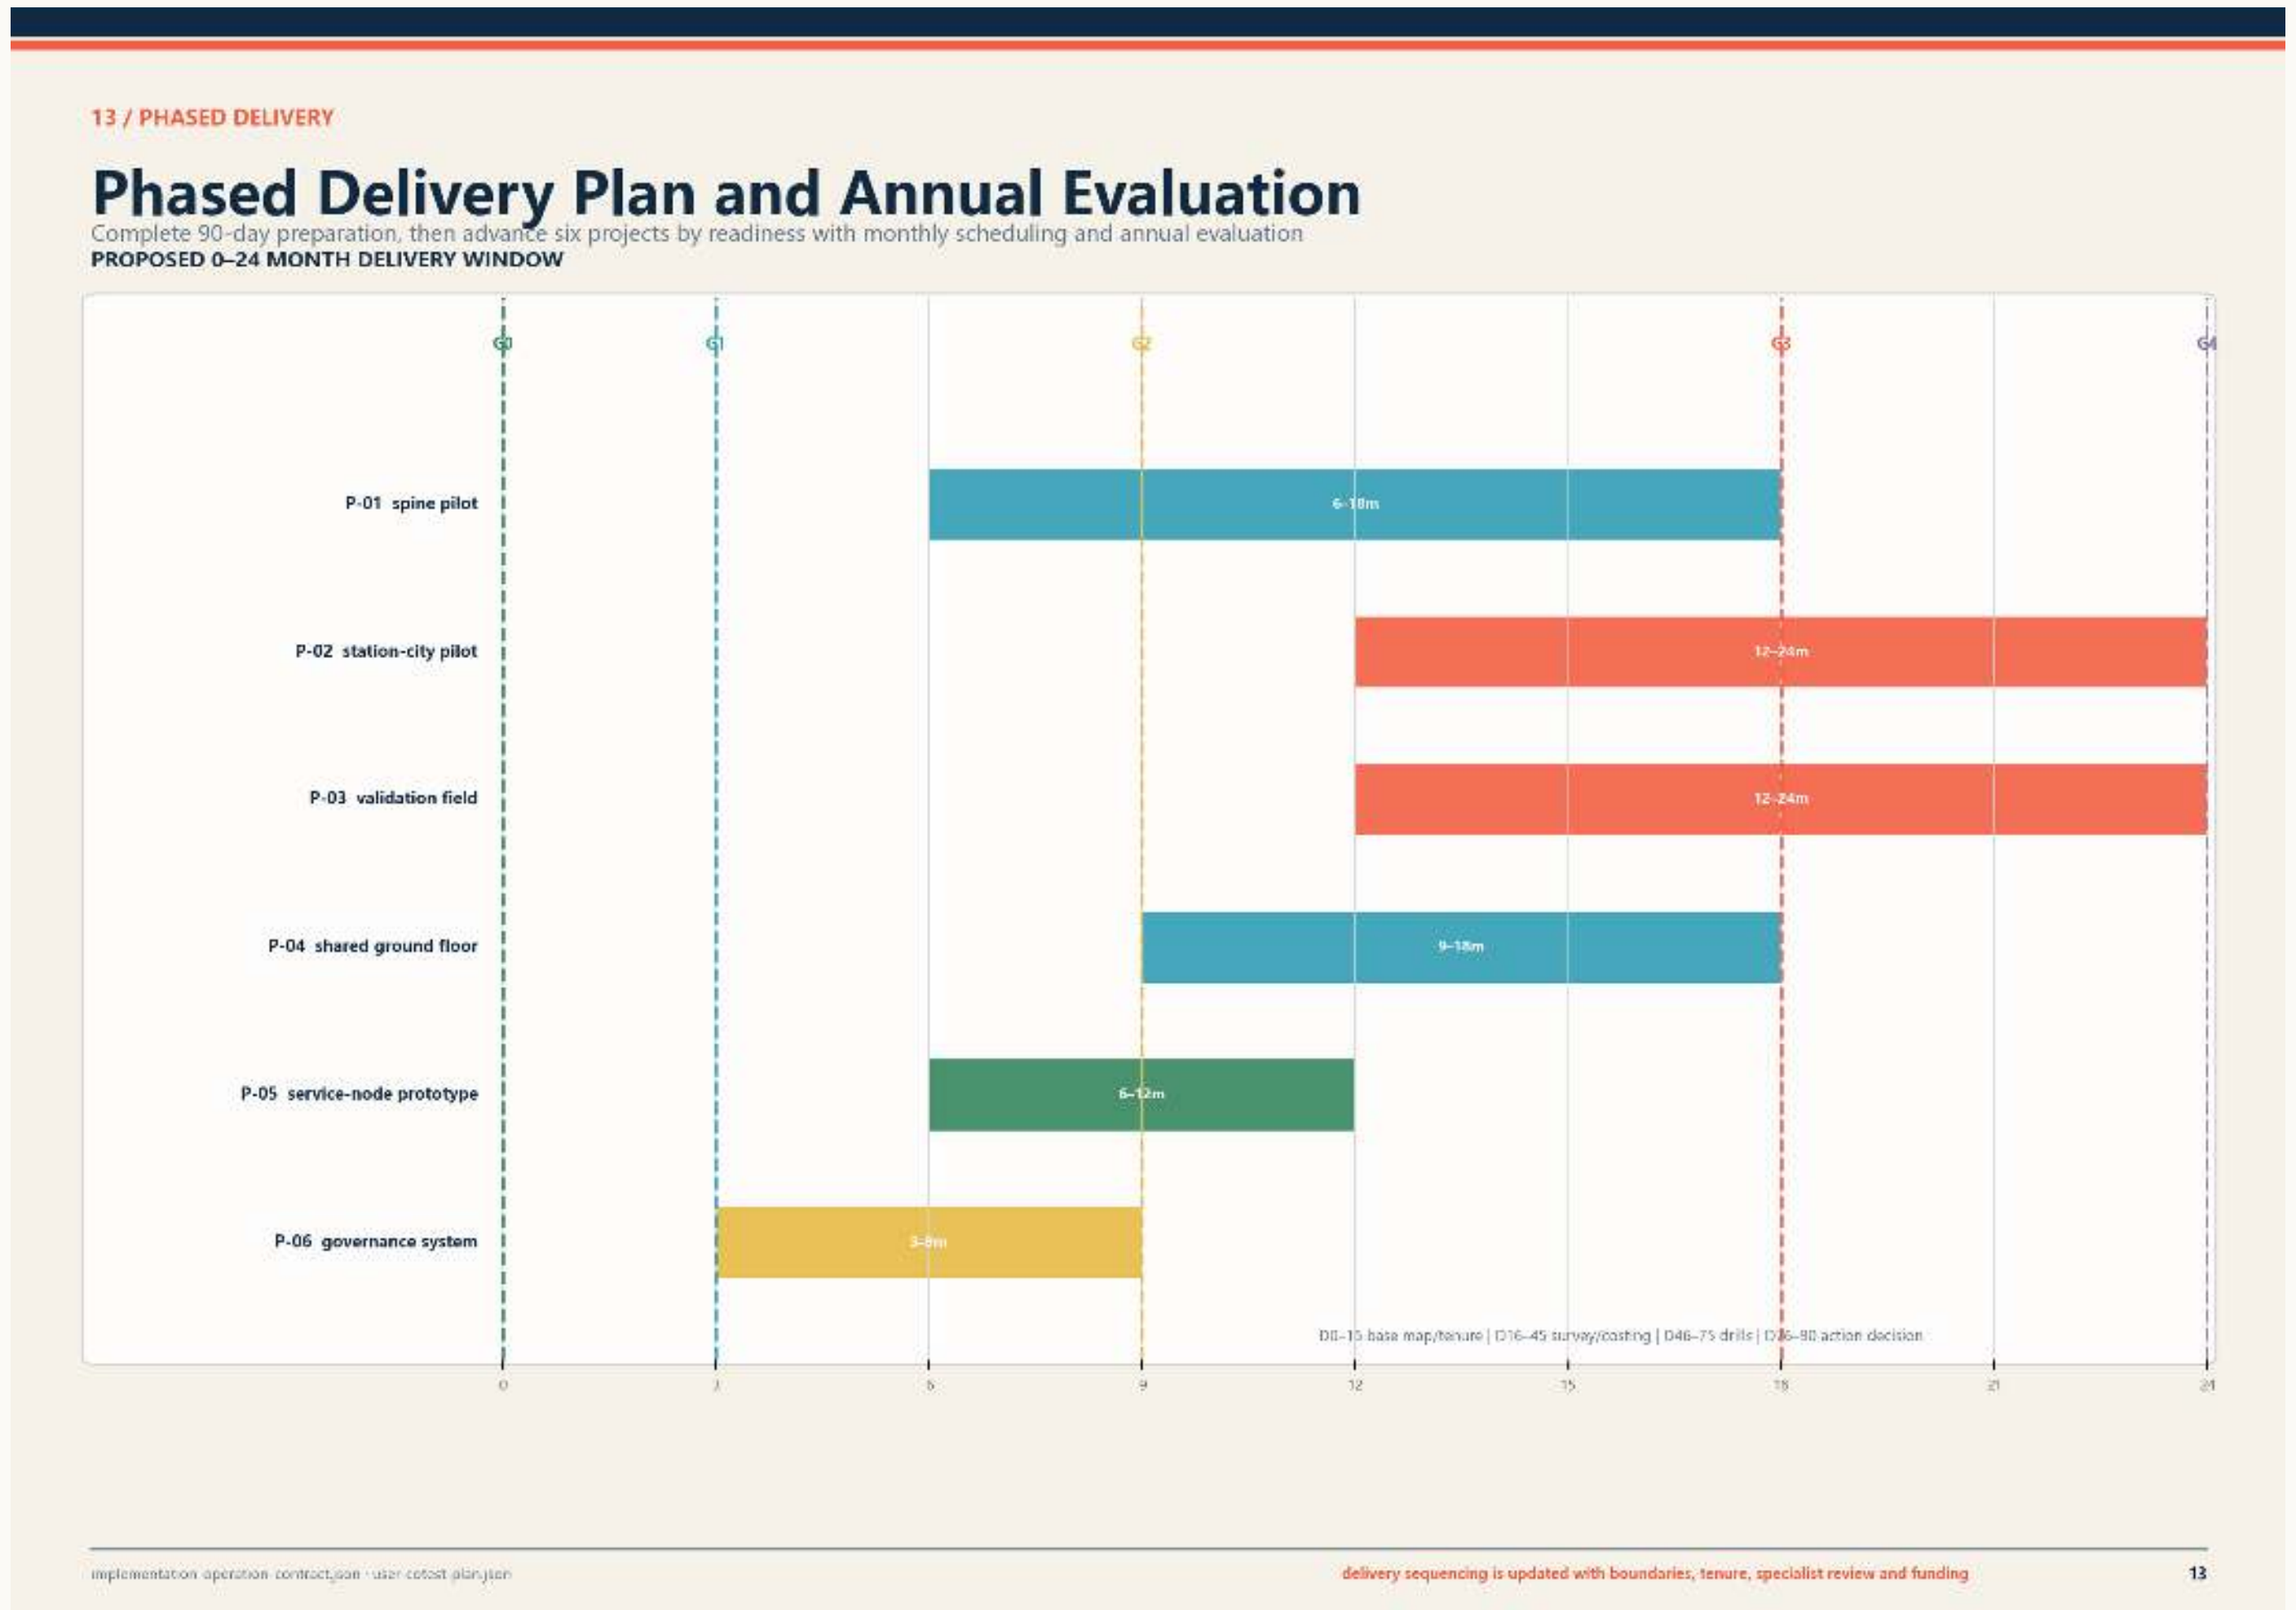

delivery program

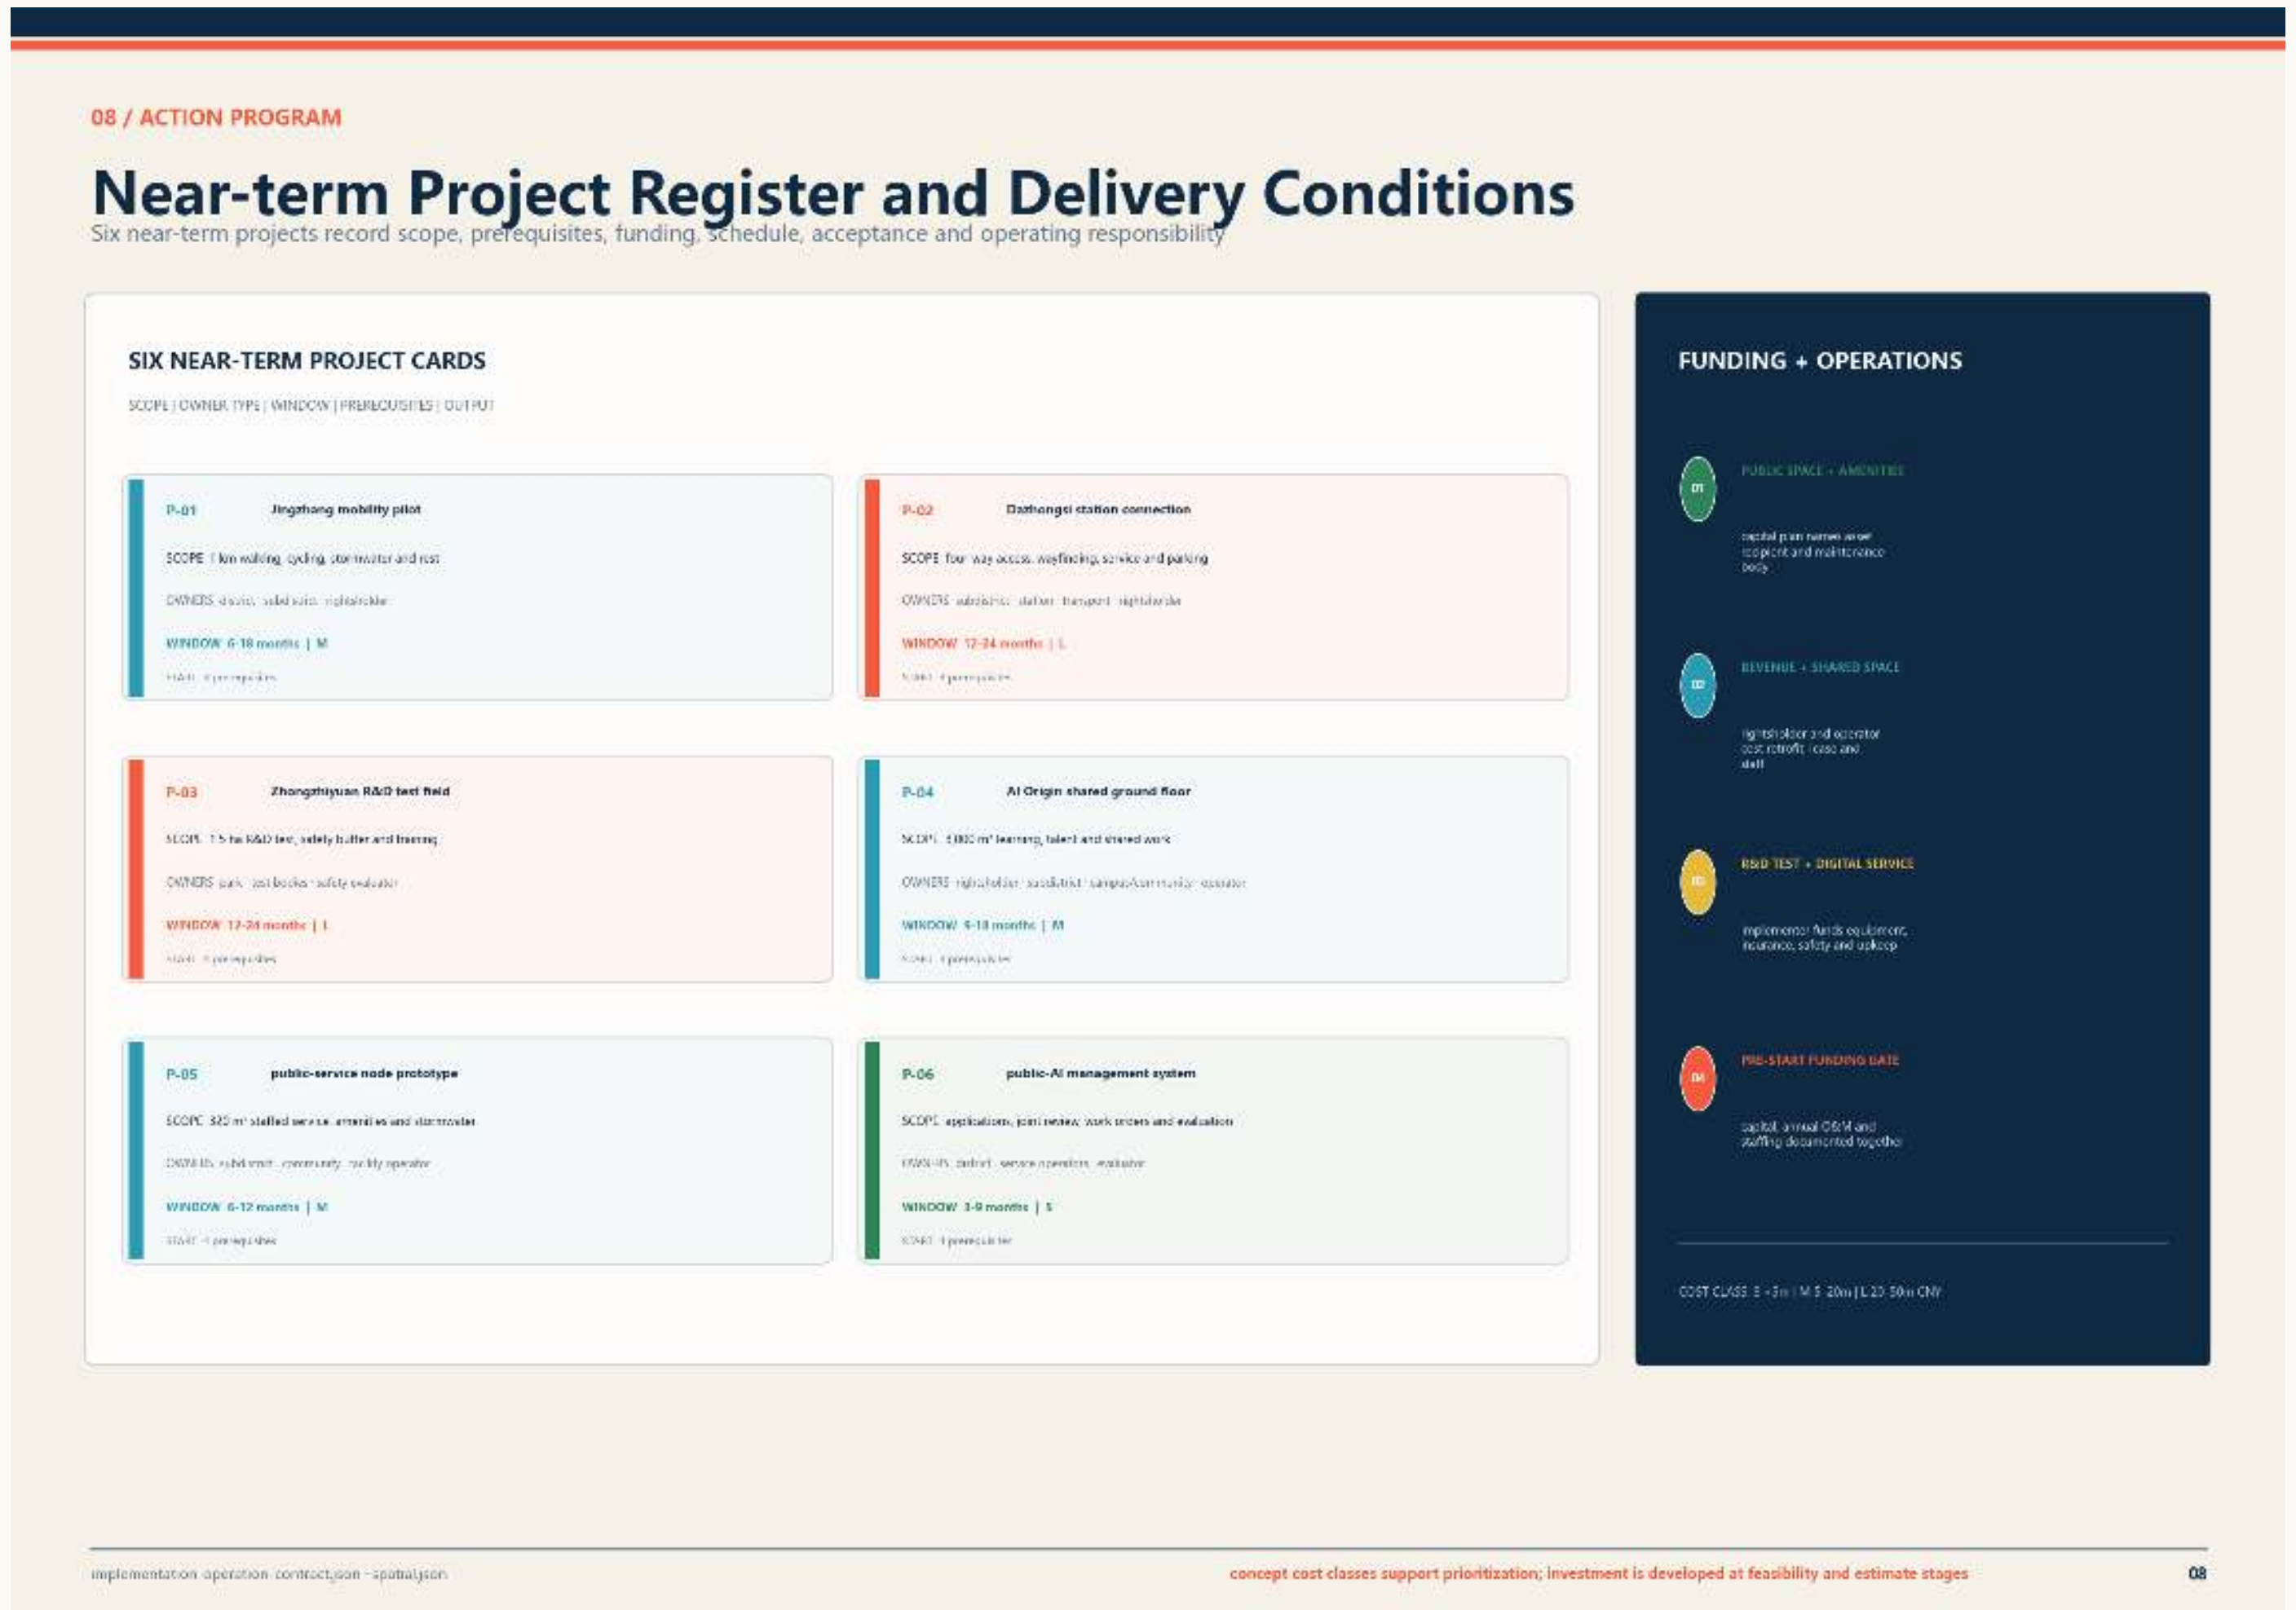

six near-term project packages

Inclusion and Annual Operations: AI Service Requires Human Fallback

The 8-80 equal-service contract spans facilities, information and operations

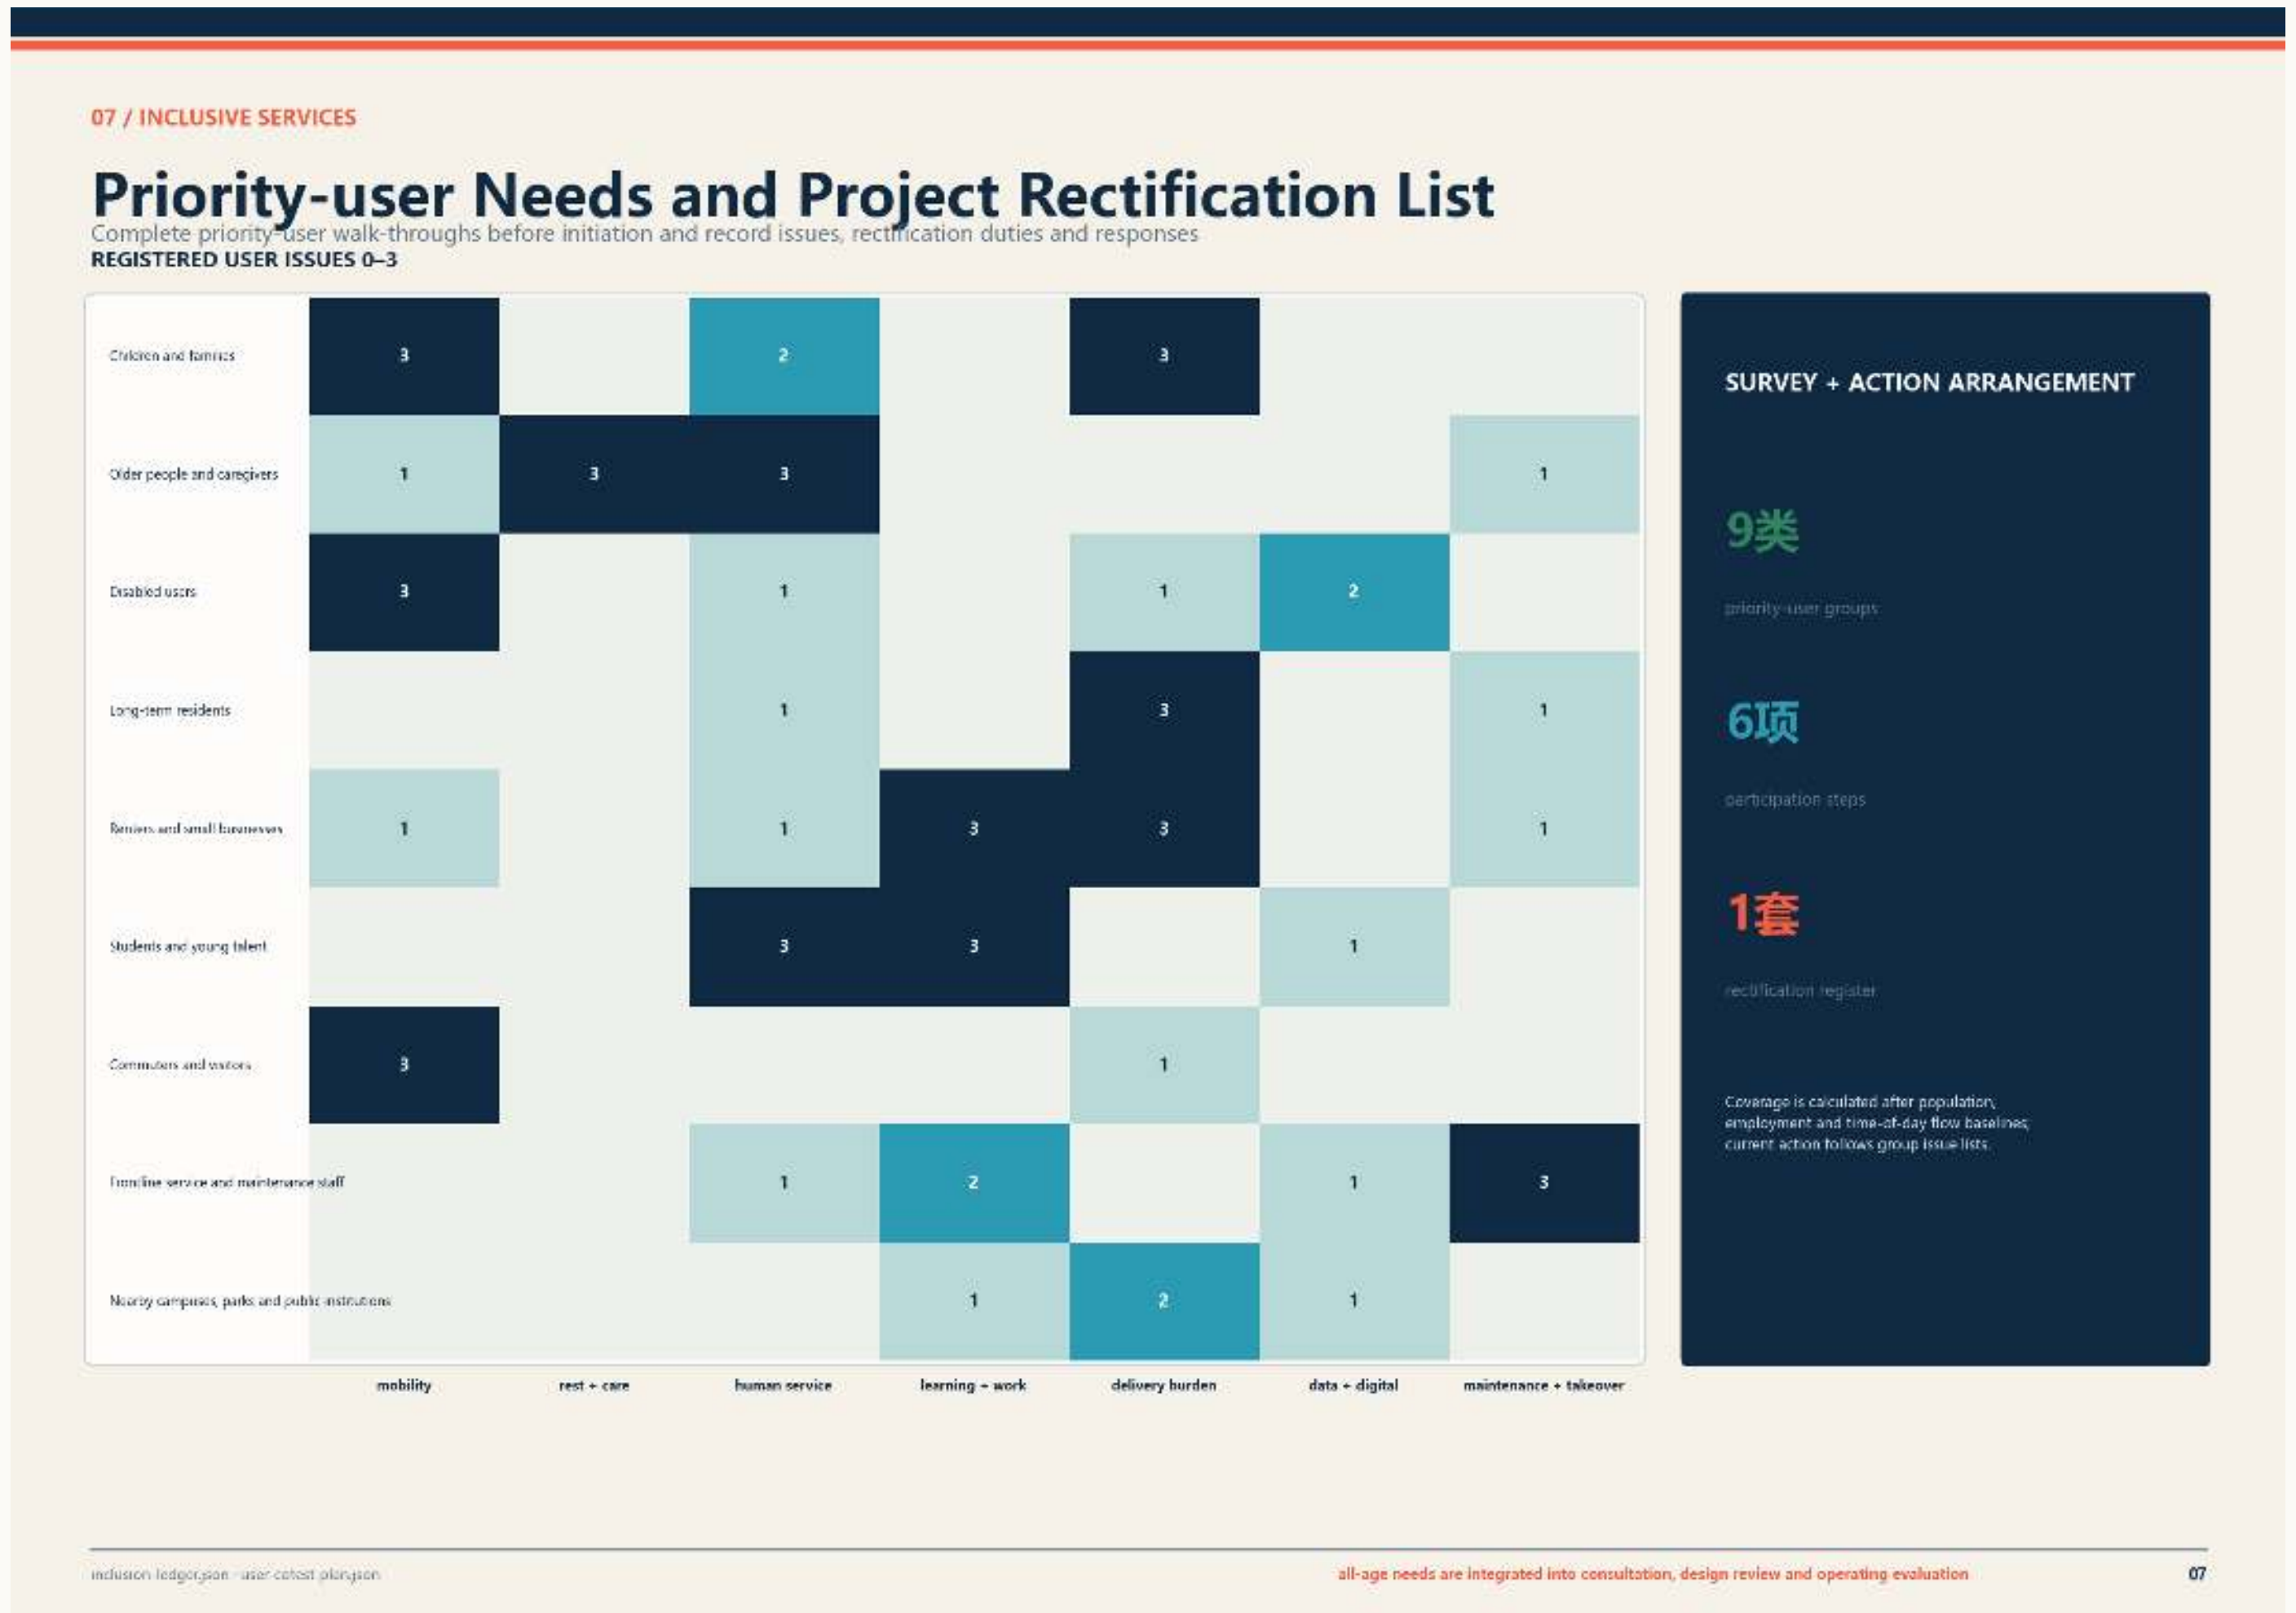

inclusion and incidence

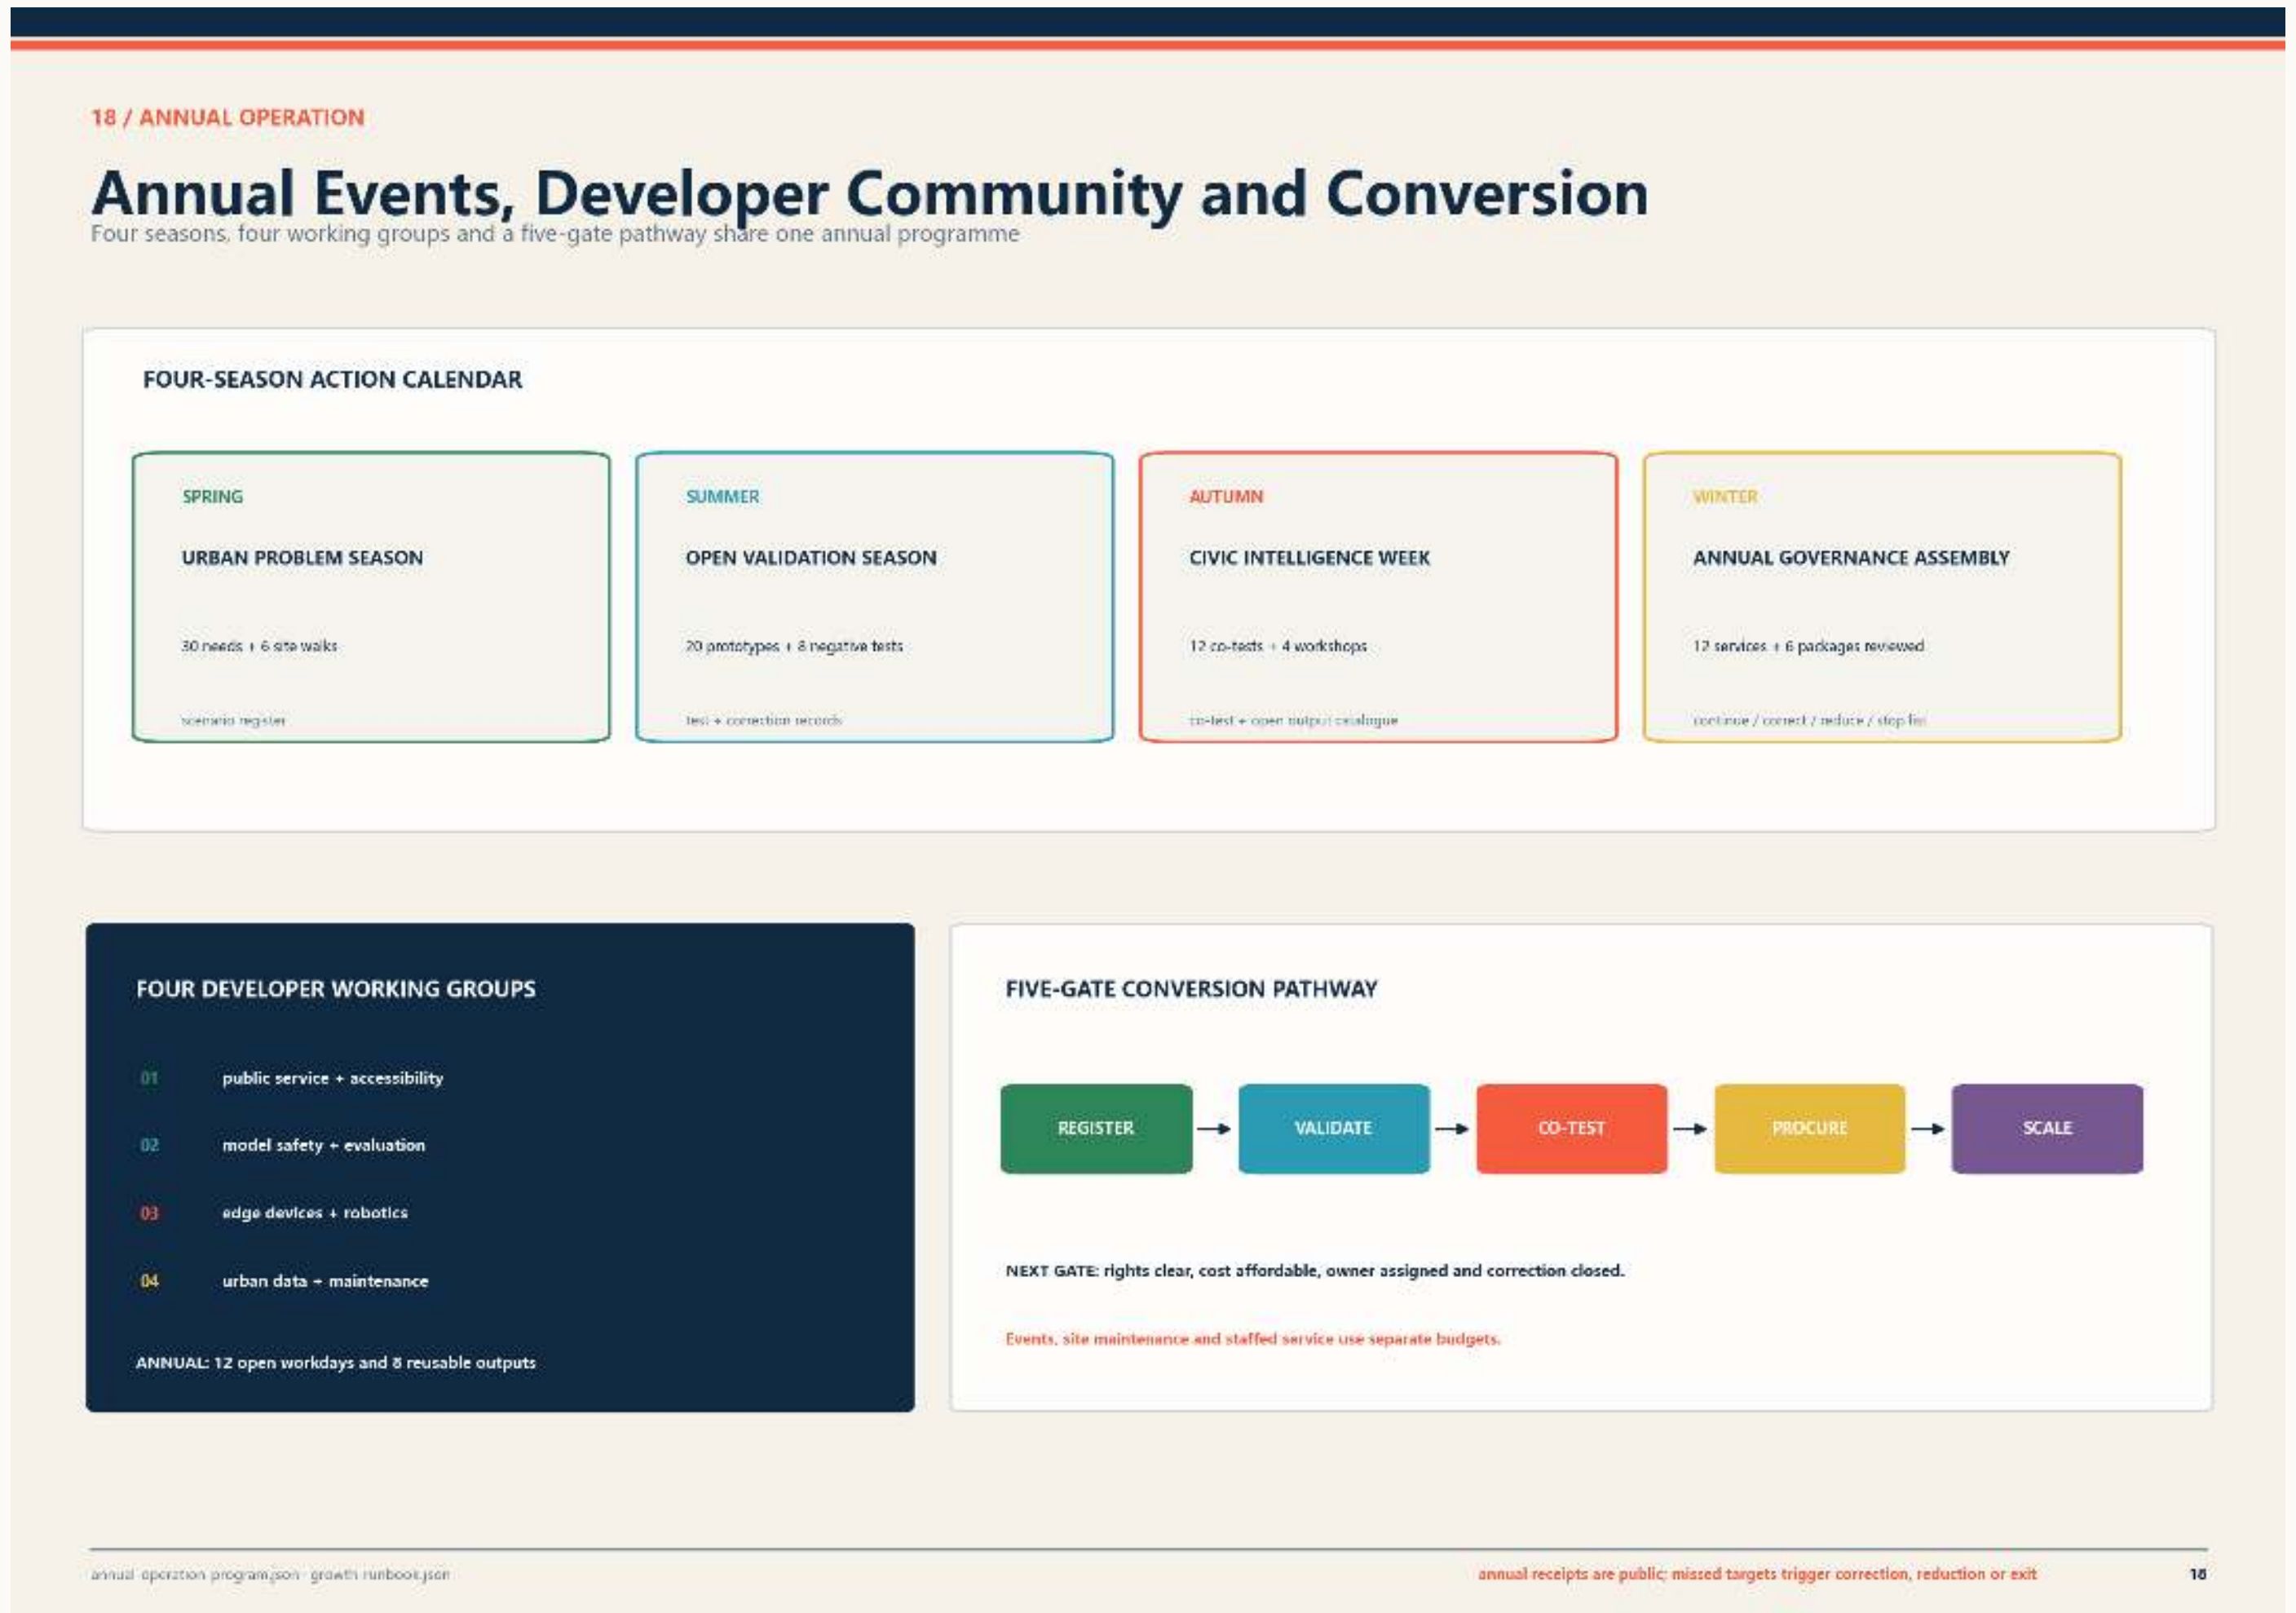

annual operating cycle

AI Governance and Trial-operation Protocol

Technical launch, public feedback, incident tickets and annual review share one governance loop

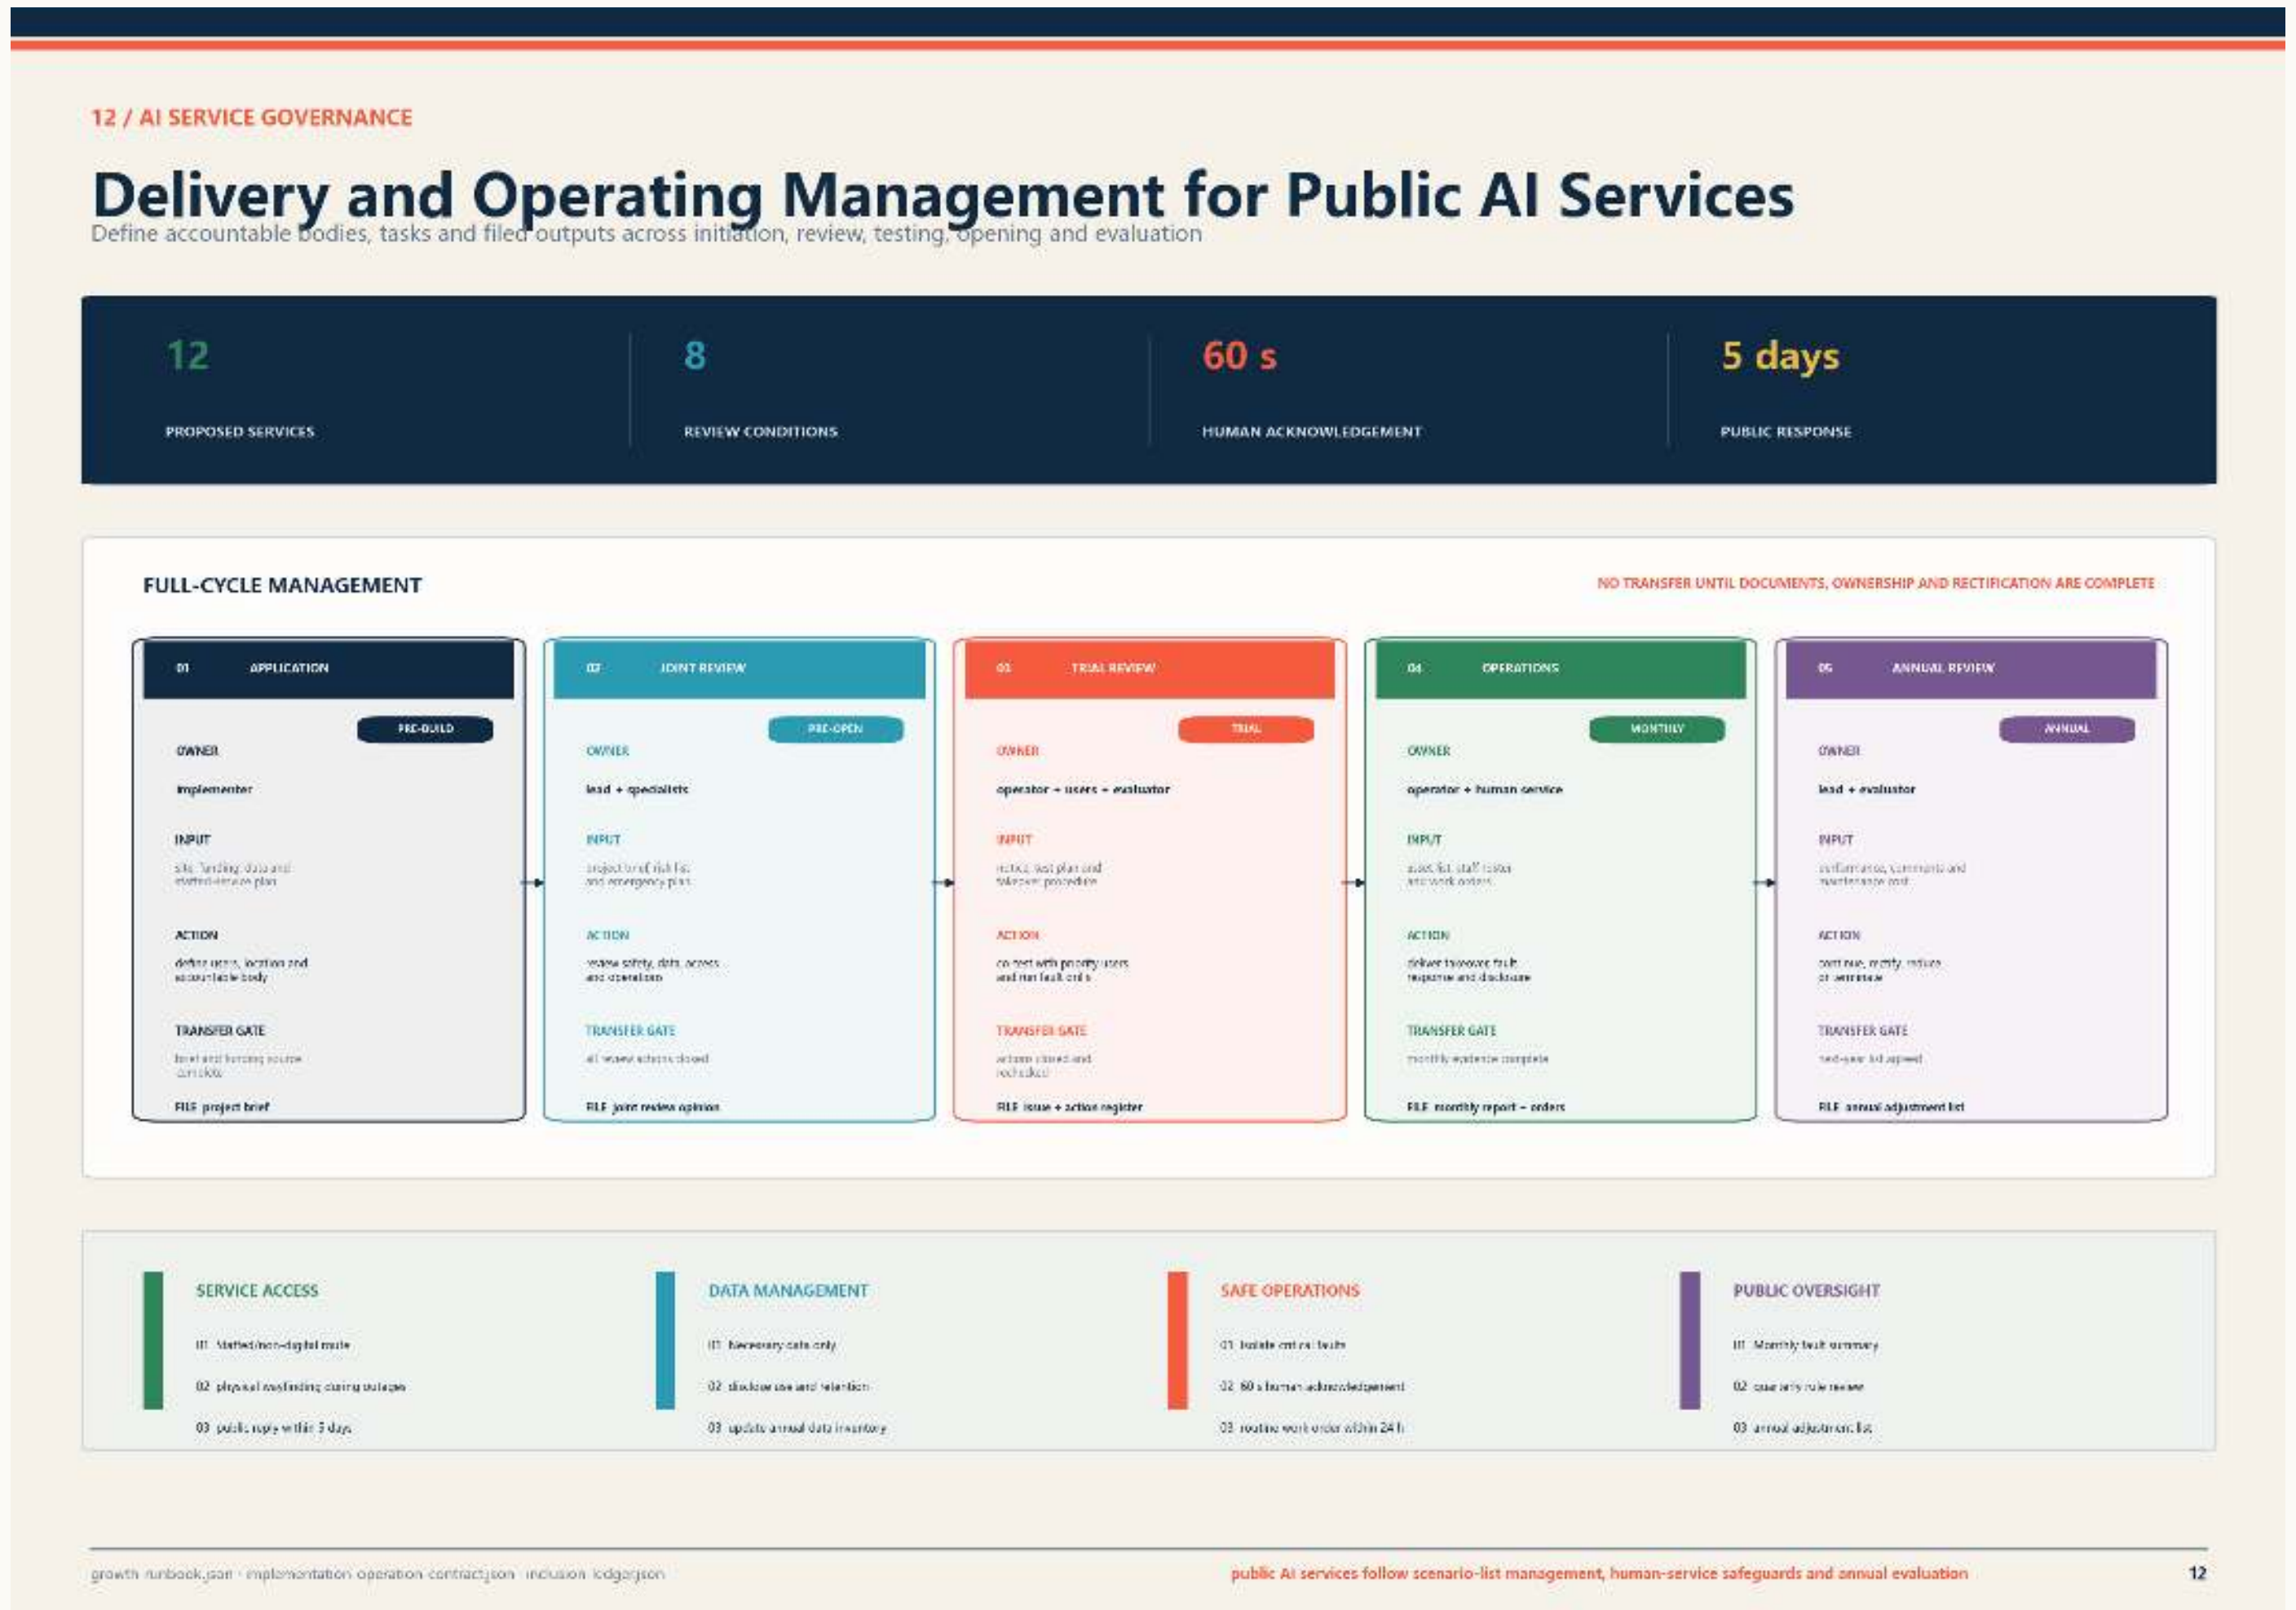

AI public-service governance

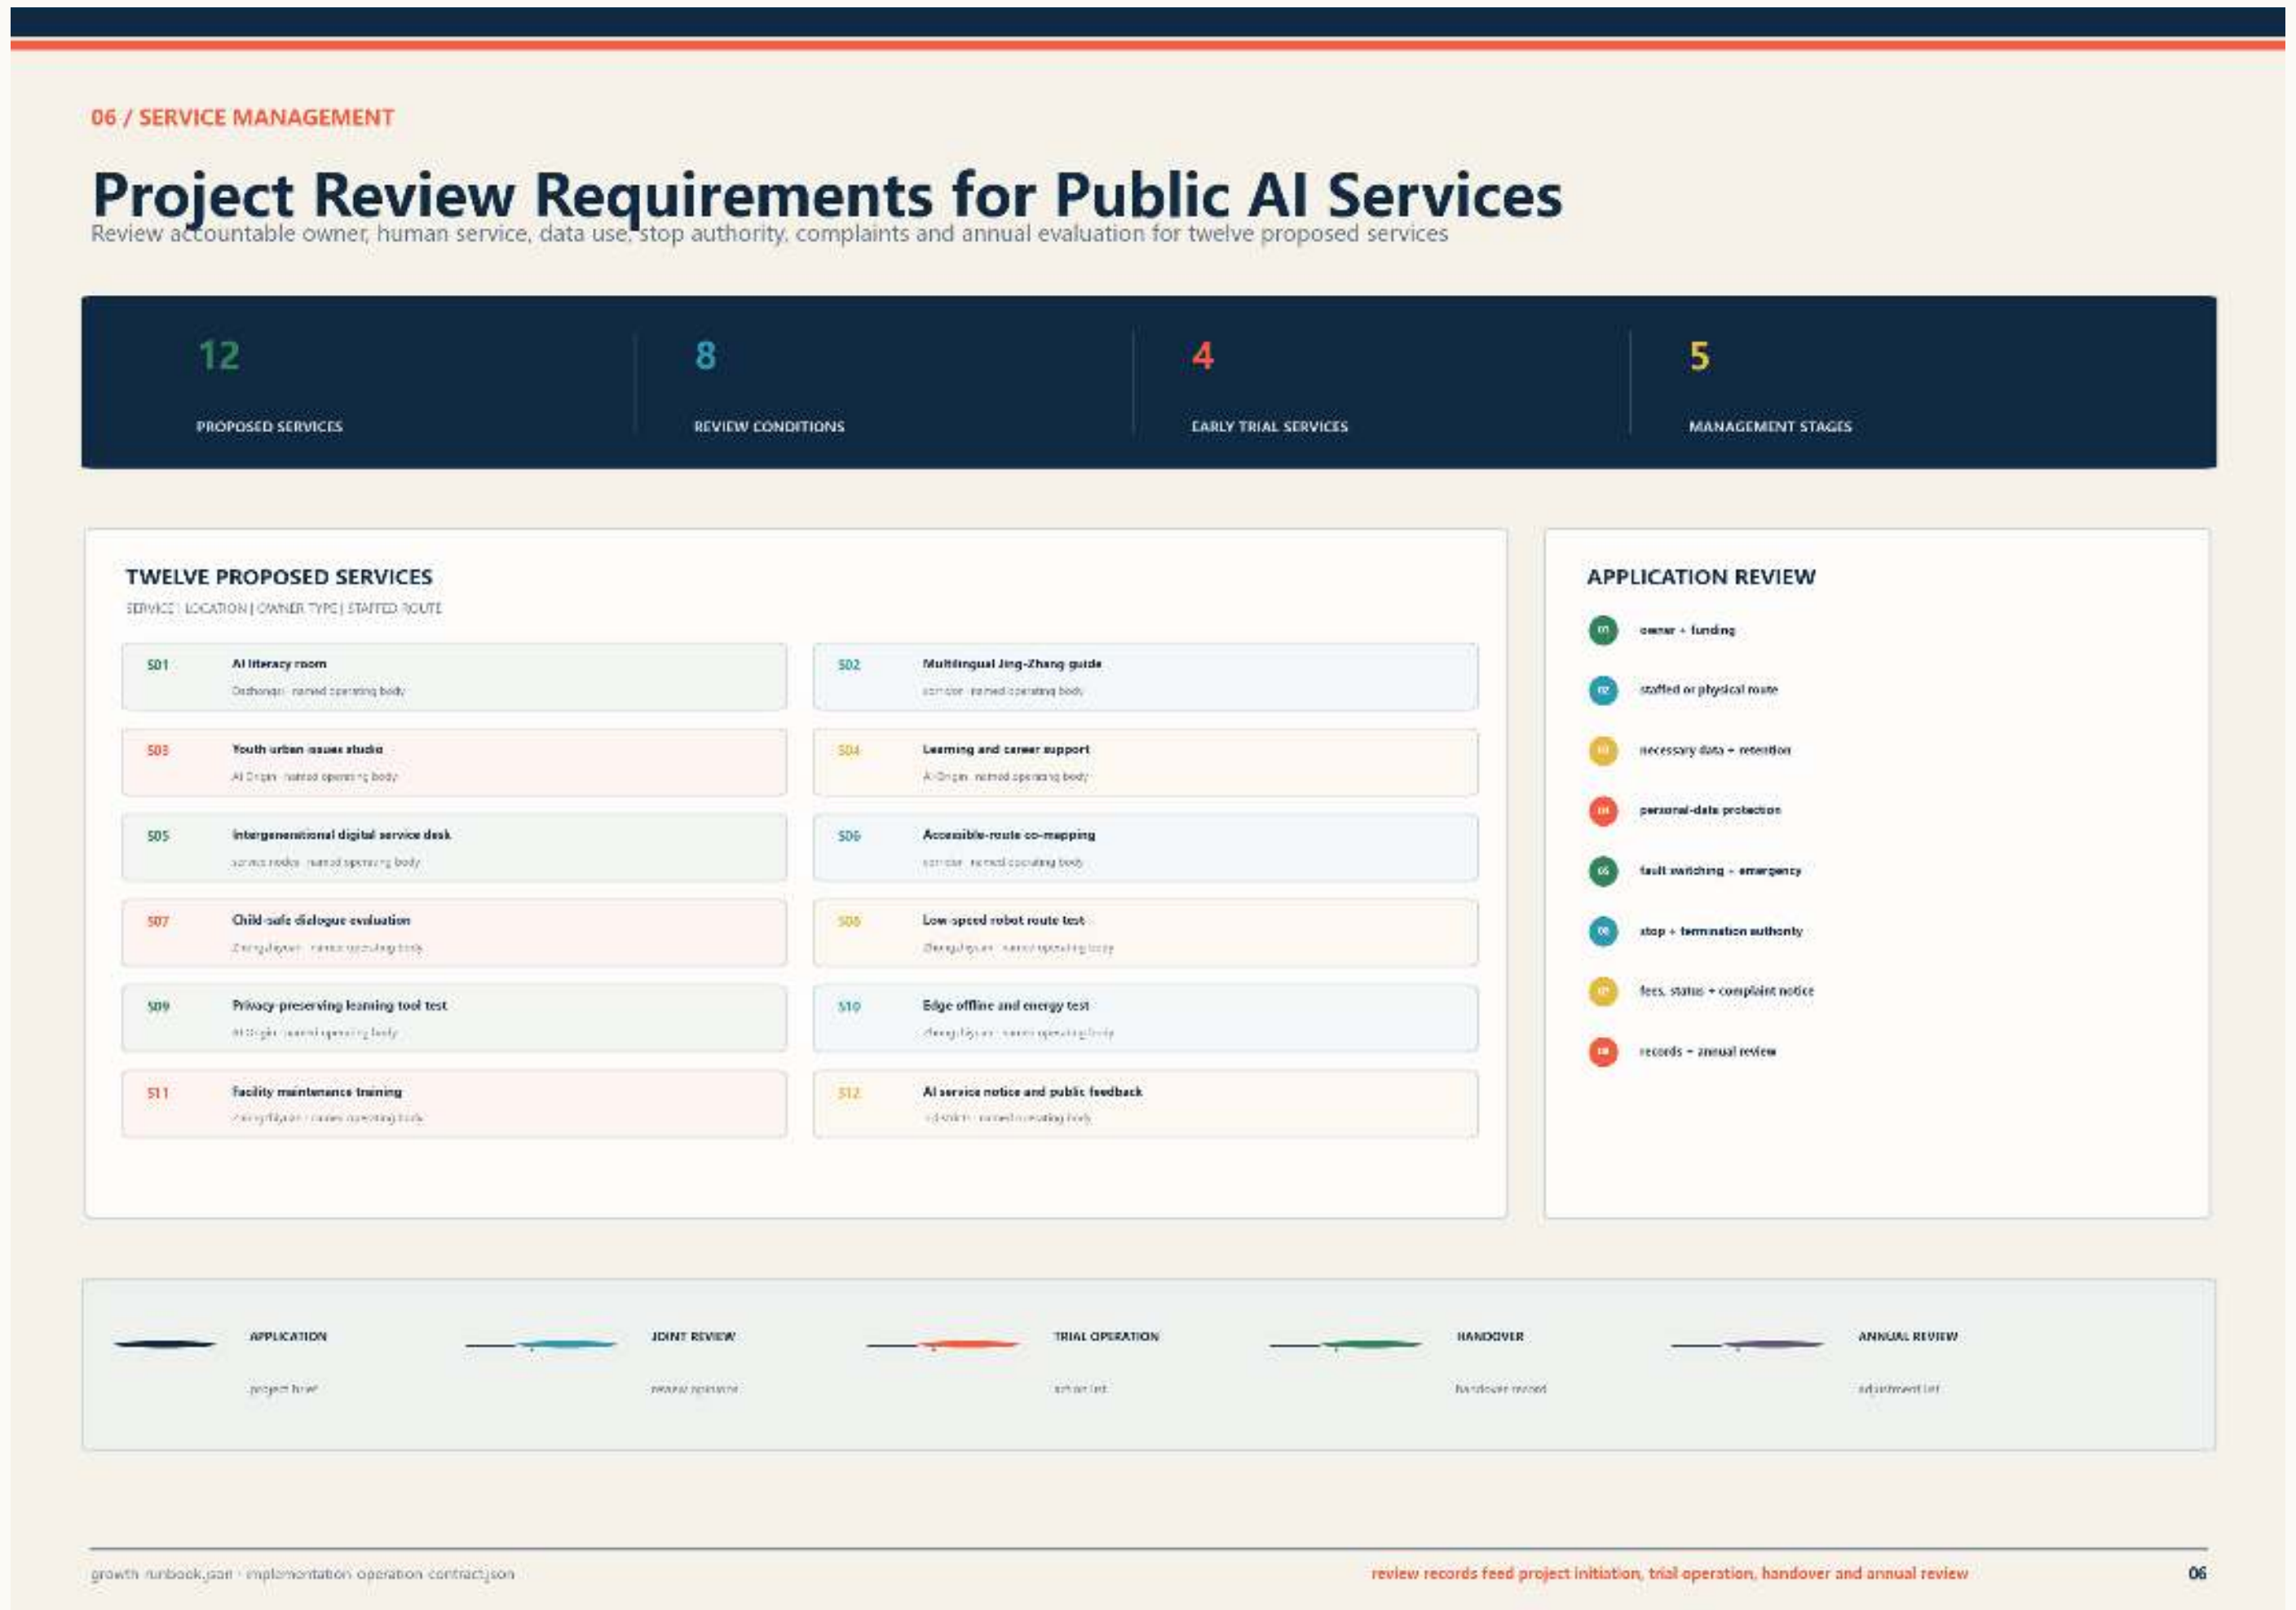

pilot / measure / review / adapt

Public Identity and Jingzhang Culture: Narrative Serves Everyday Space

Brand, cultural nodes and identity do not replace spatial evidence

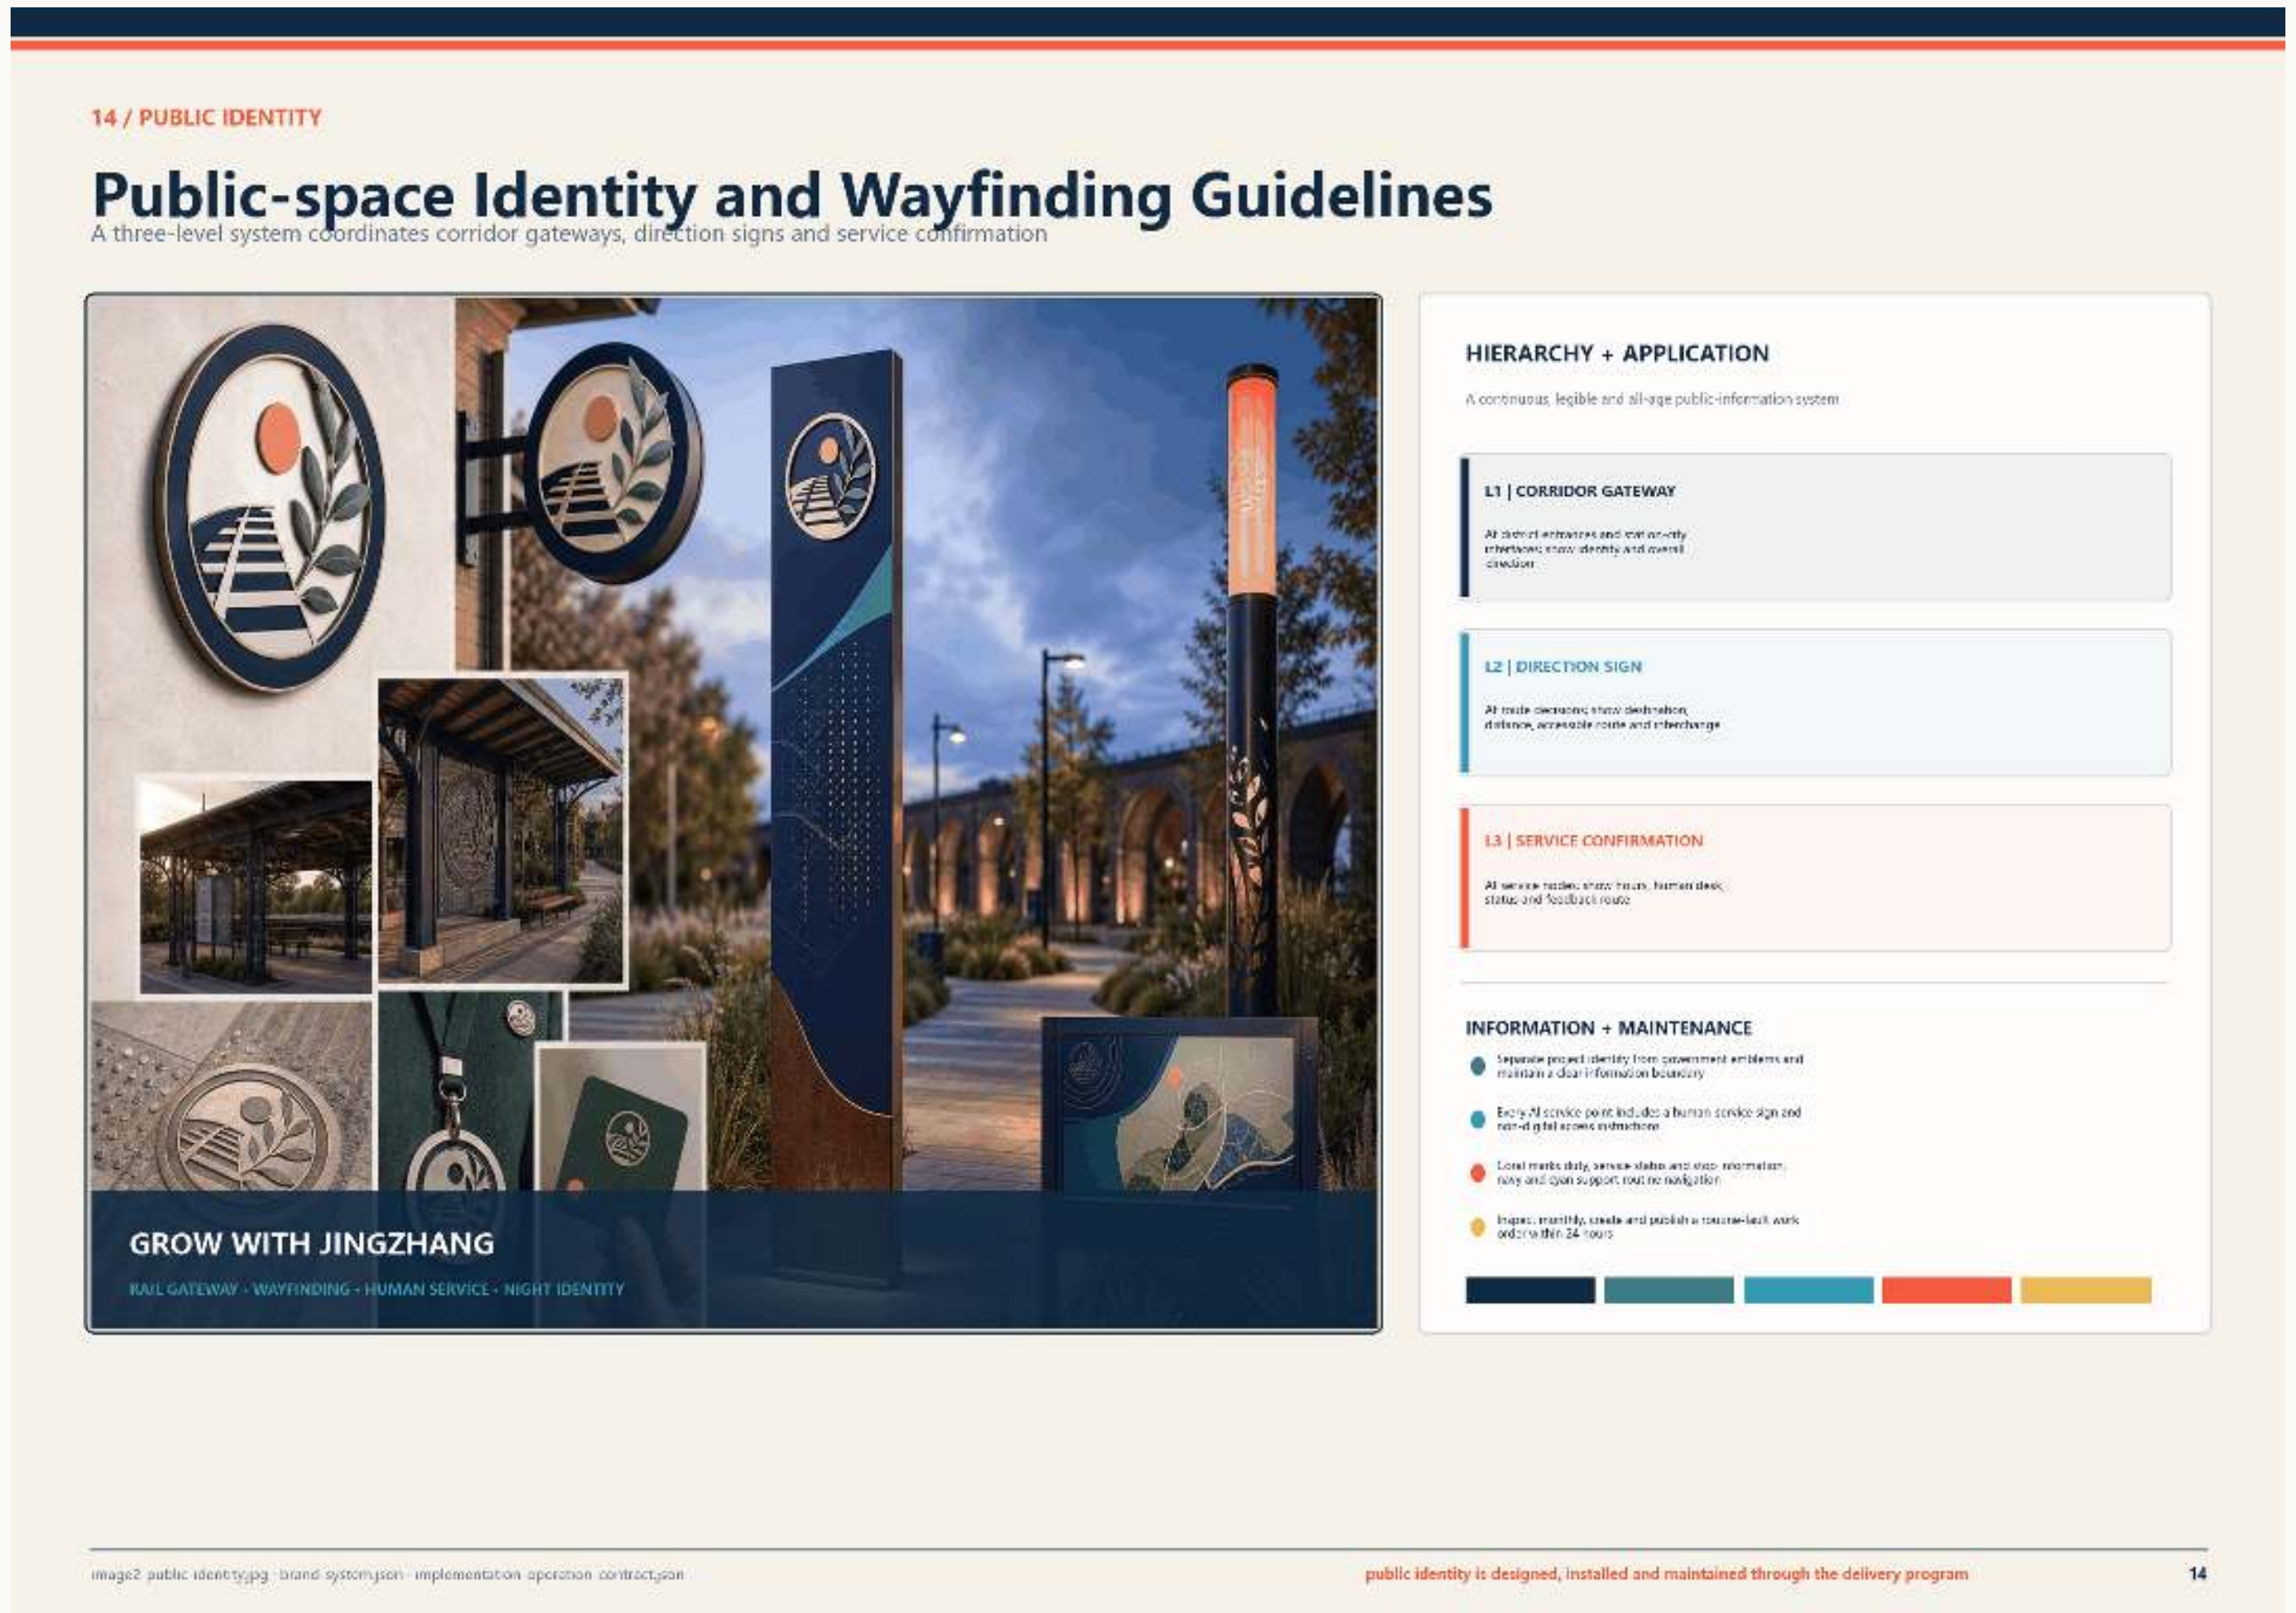

identity system

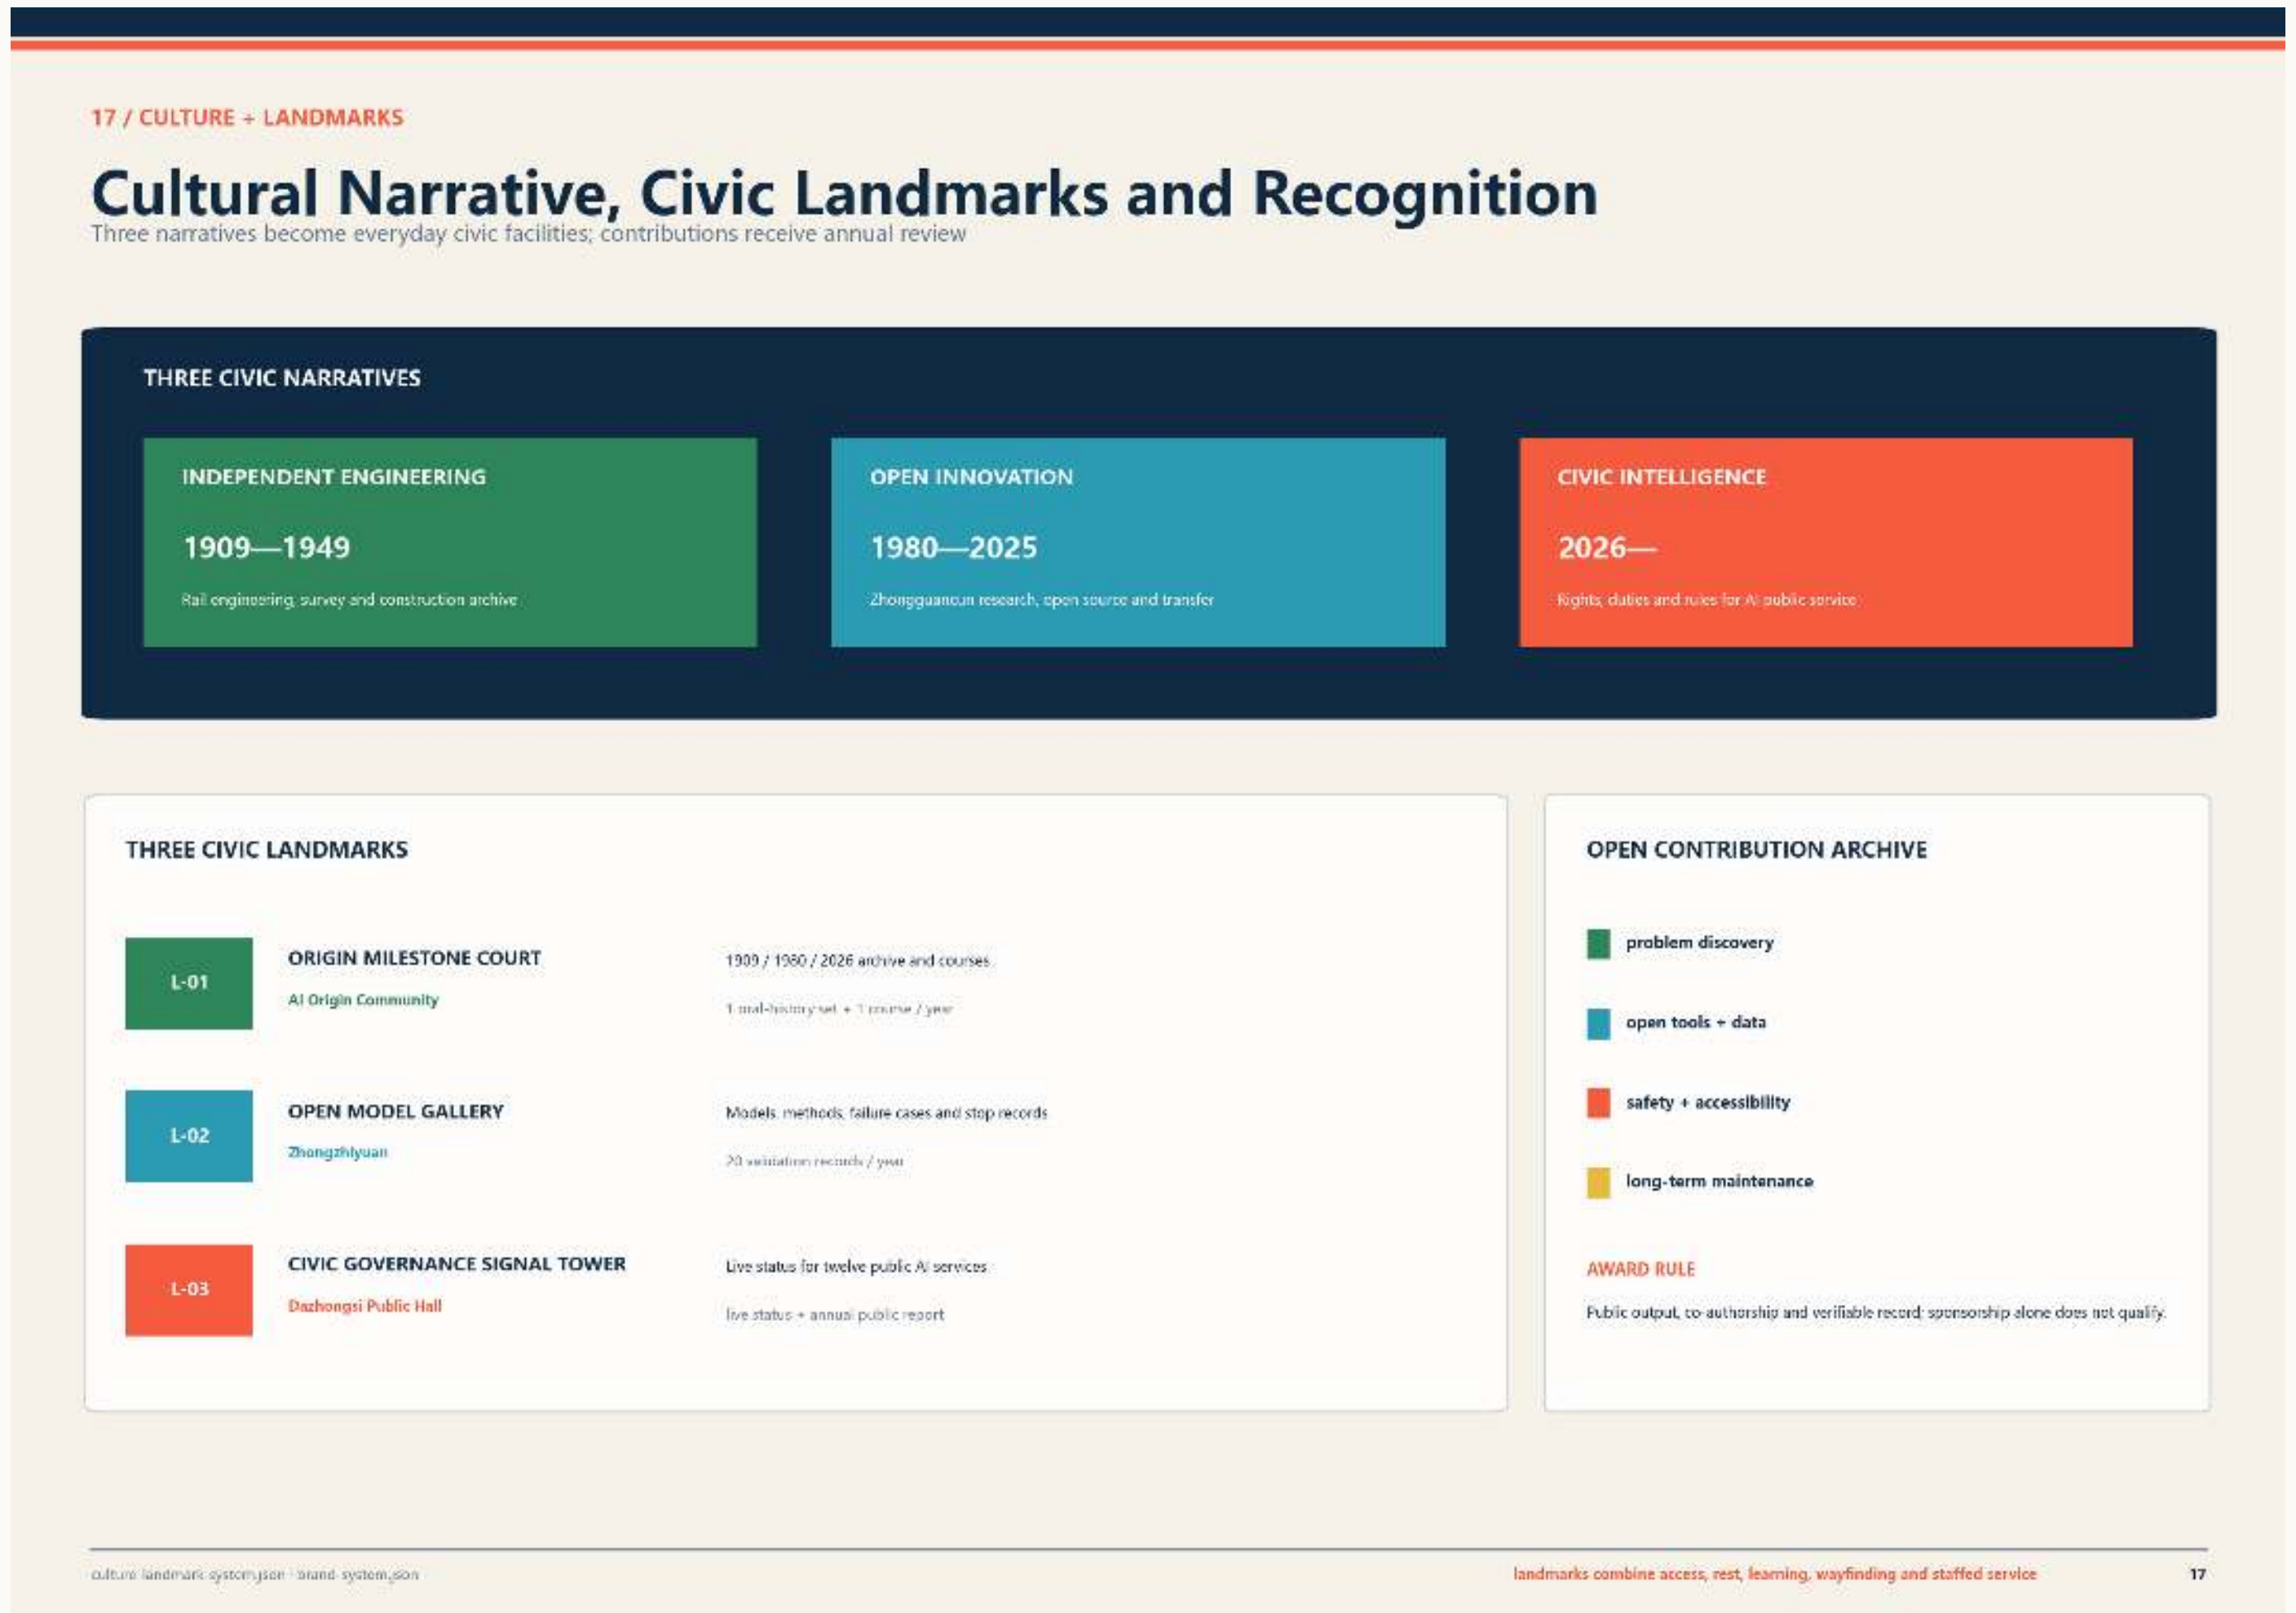

heritage / honour / pilgrimage nodes

AI Ecosystem and Regional Collaboration: External References for Programming

Cases and regional collaboration inform programming but are not existing-condition spatial data

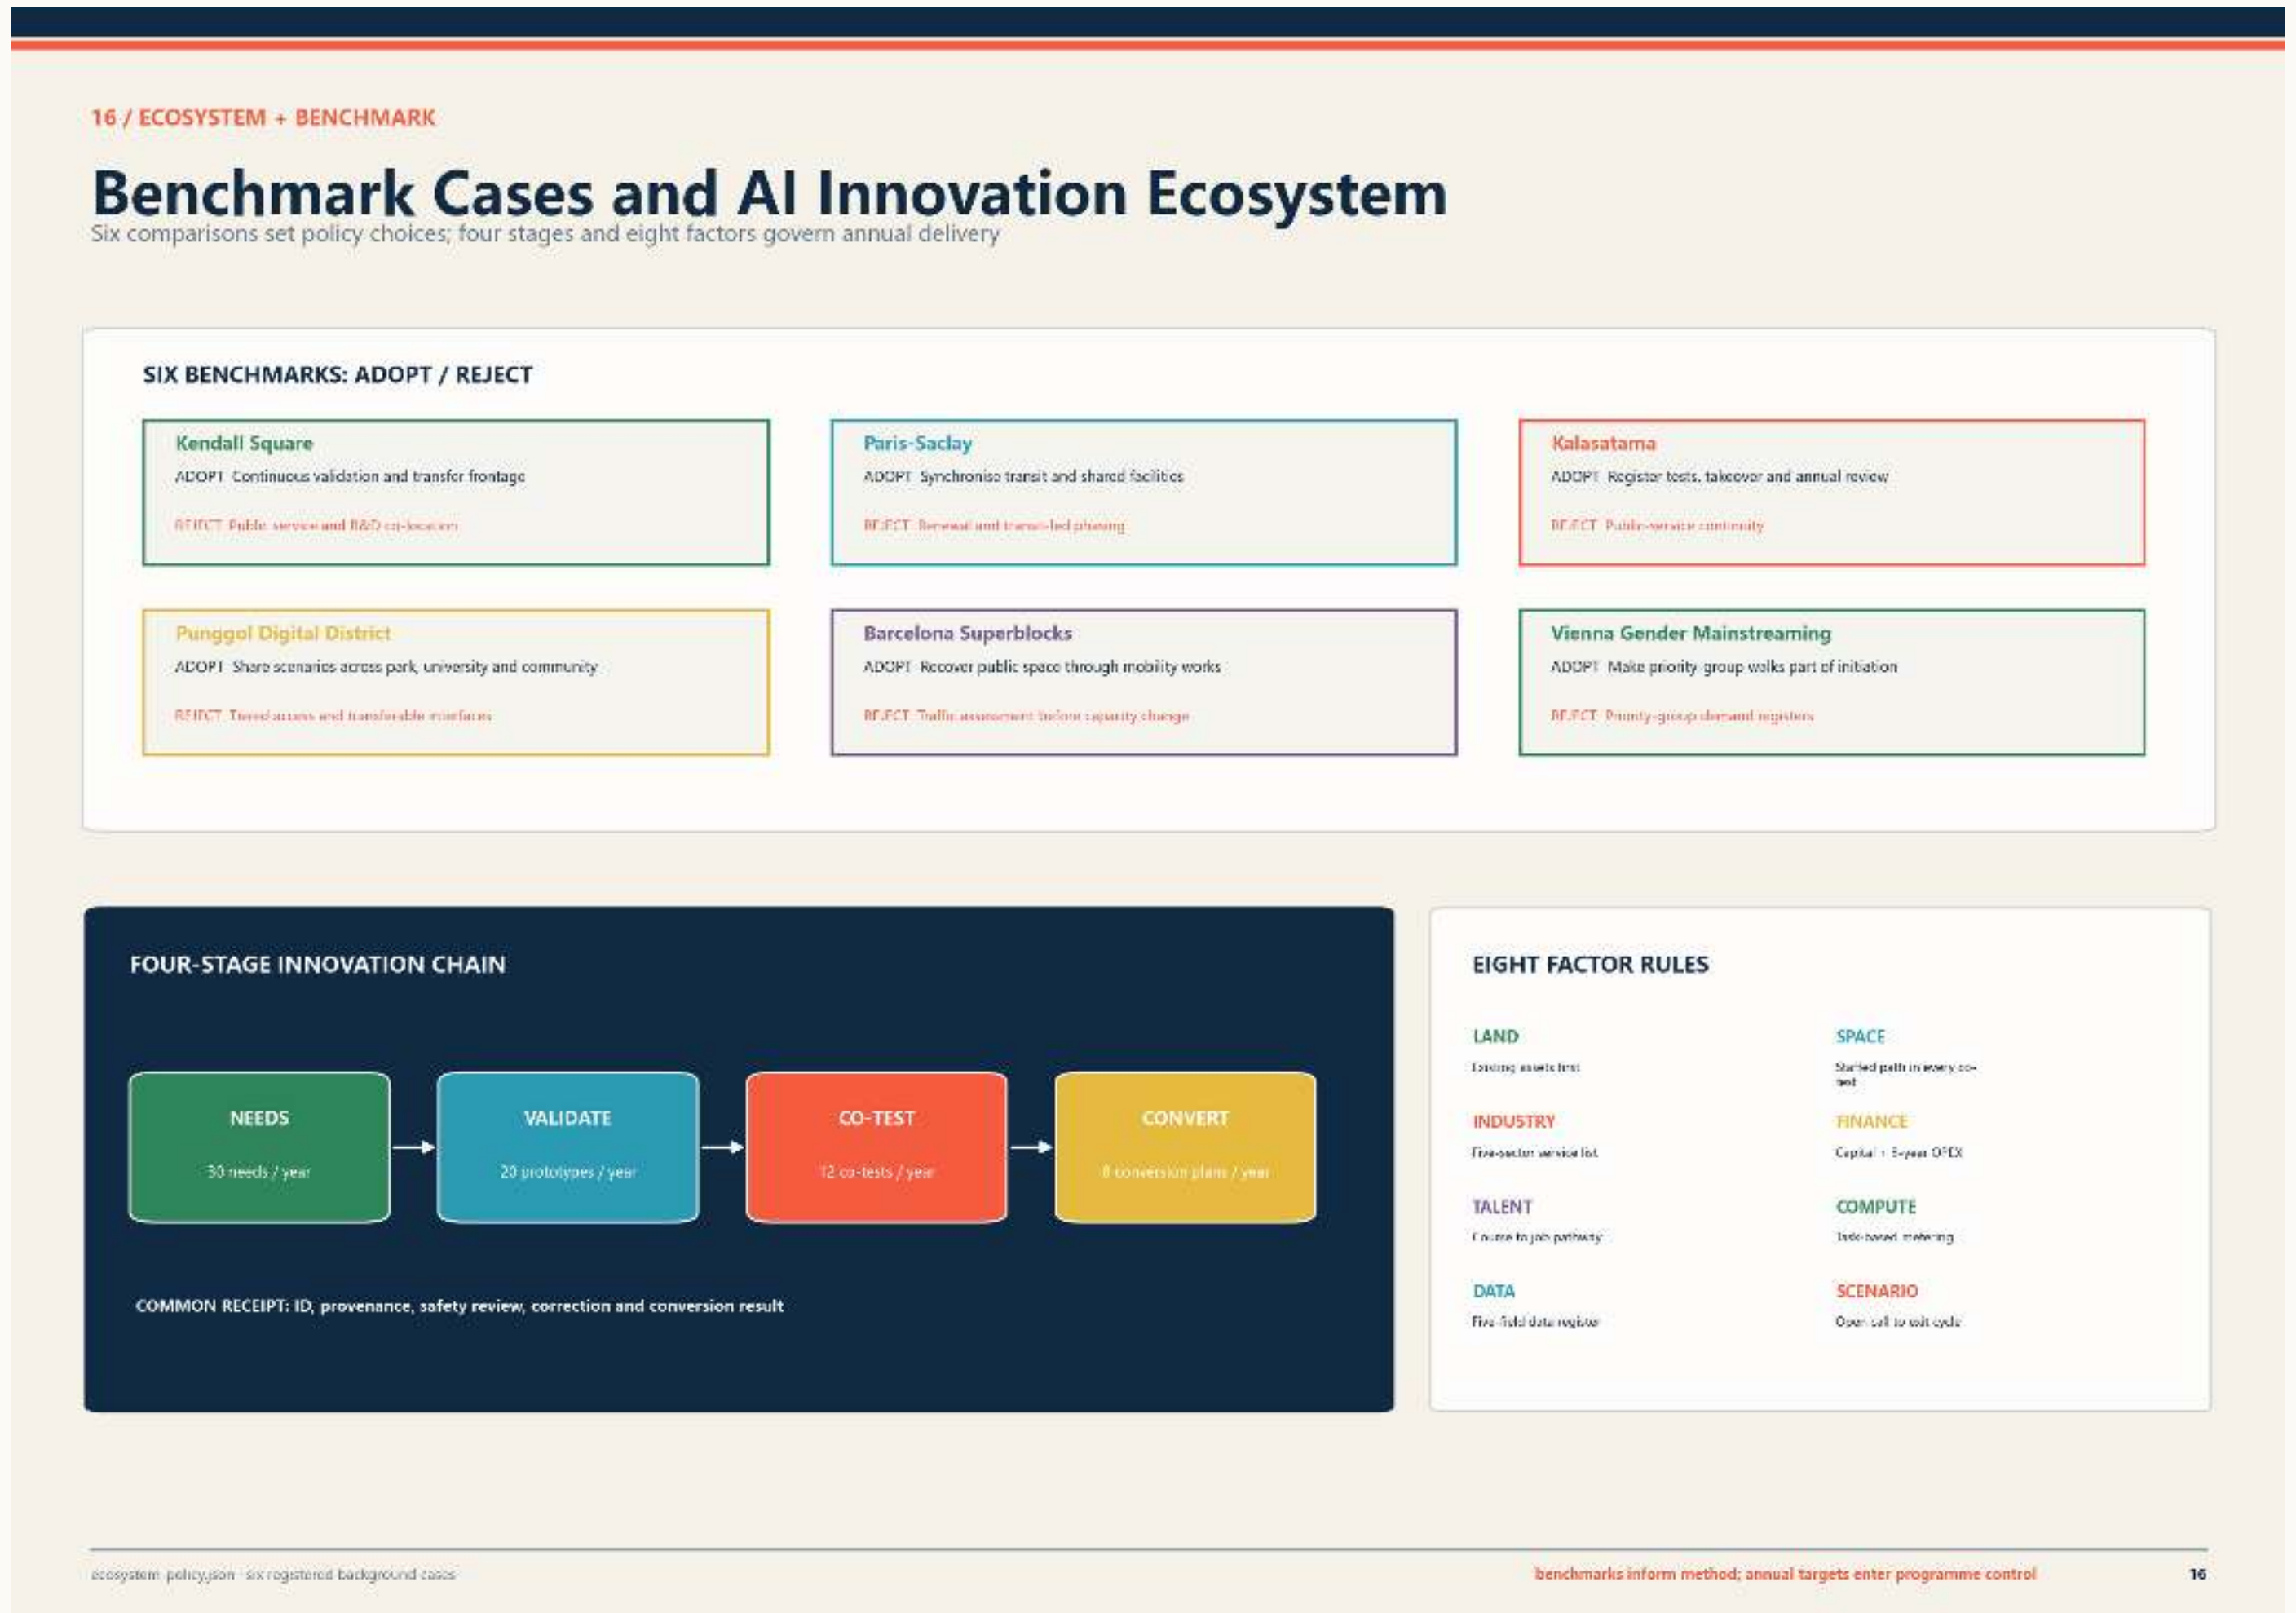

ecosystem benchmark

regional action network

Make Evidence Boundaries Part of the Scheme, Not a Footnote

Sentinel green and official-facility validation are complete; formal boundaries, tenure, utilities and field survey still require specialist confirmation

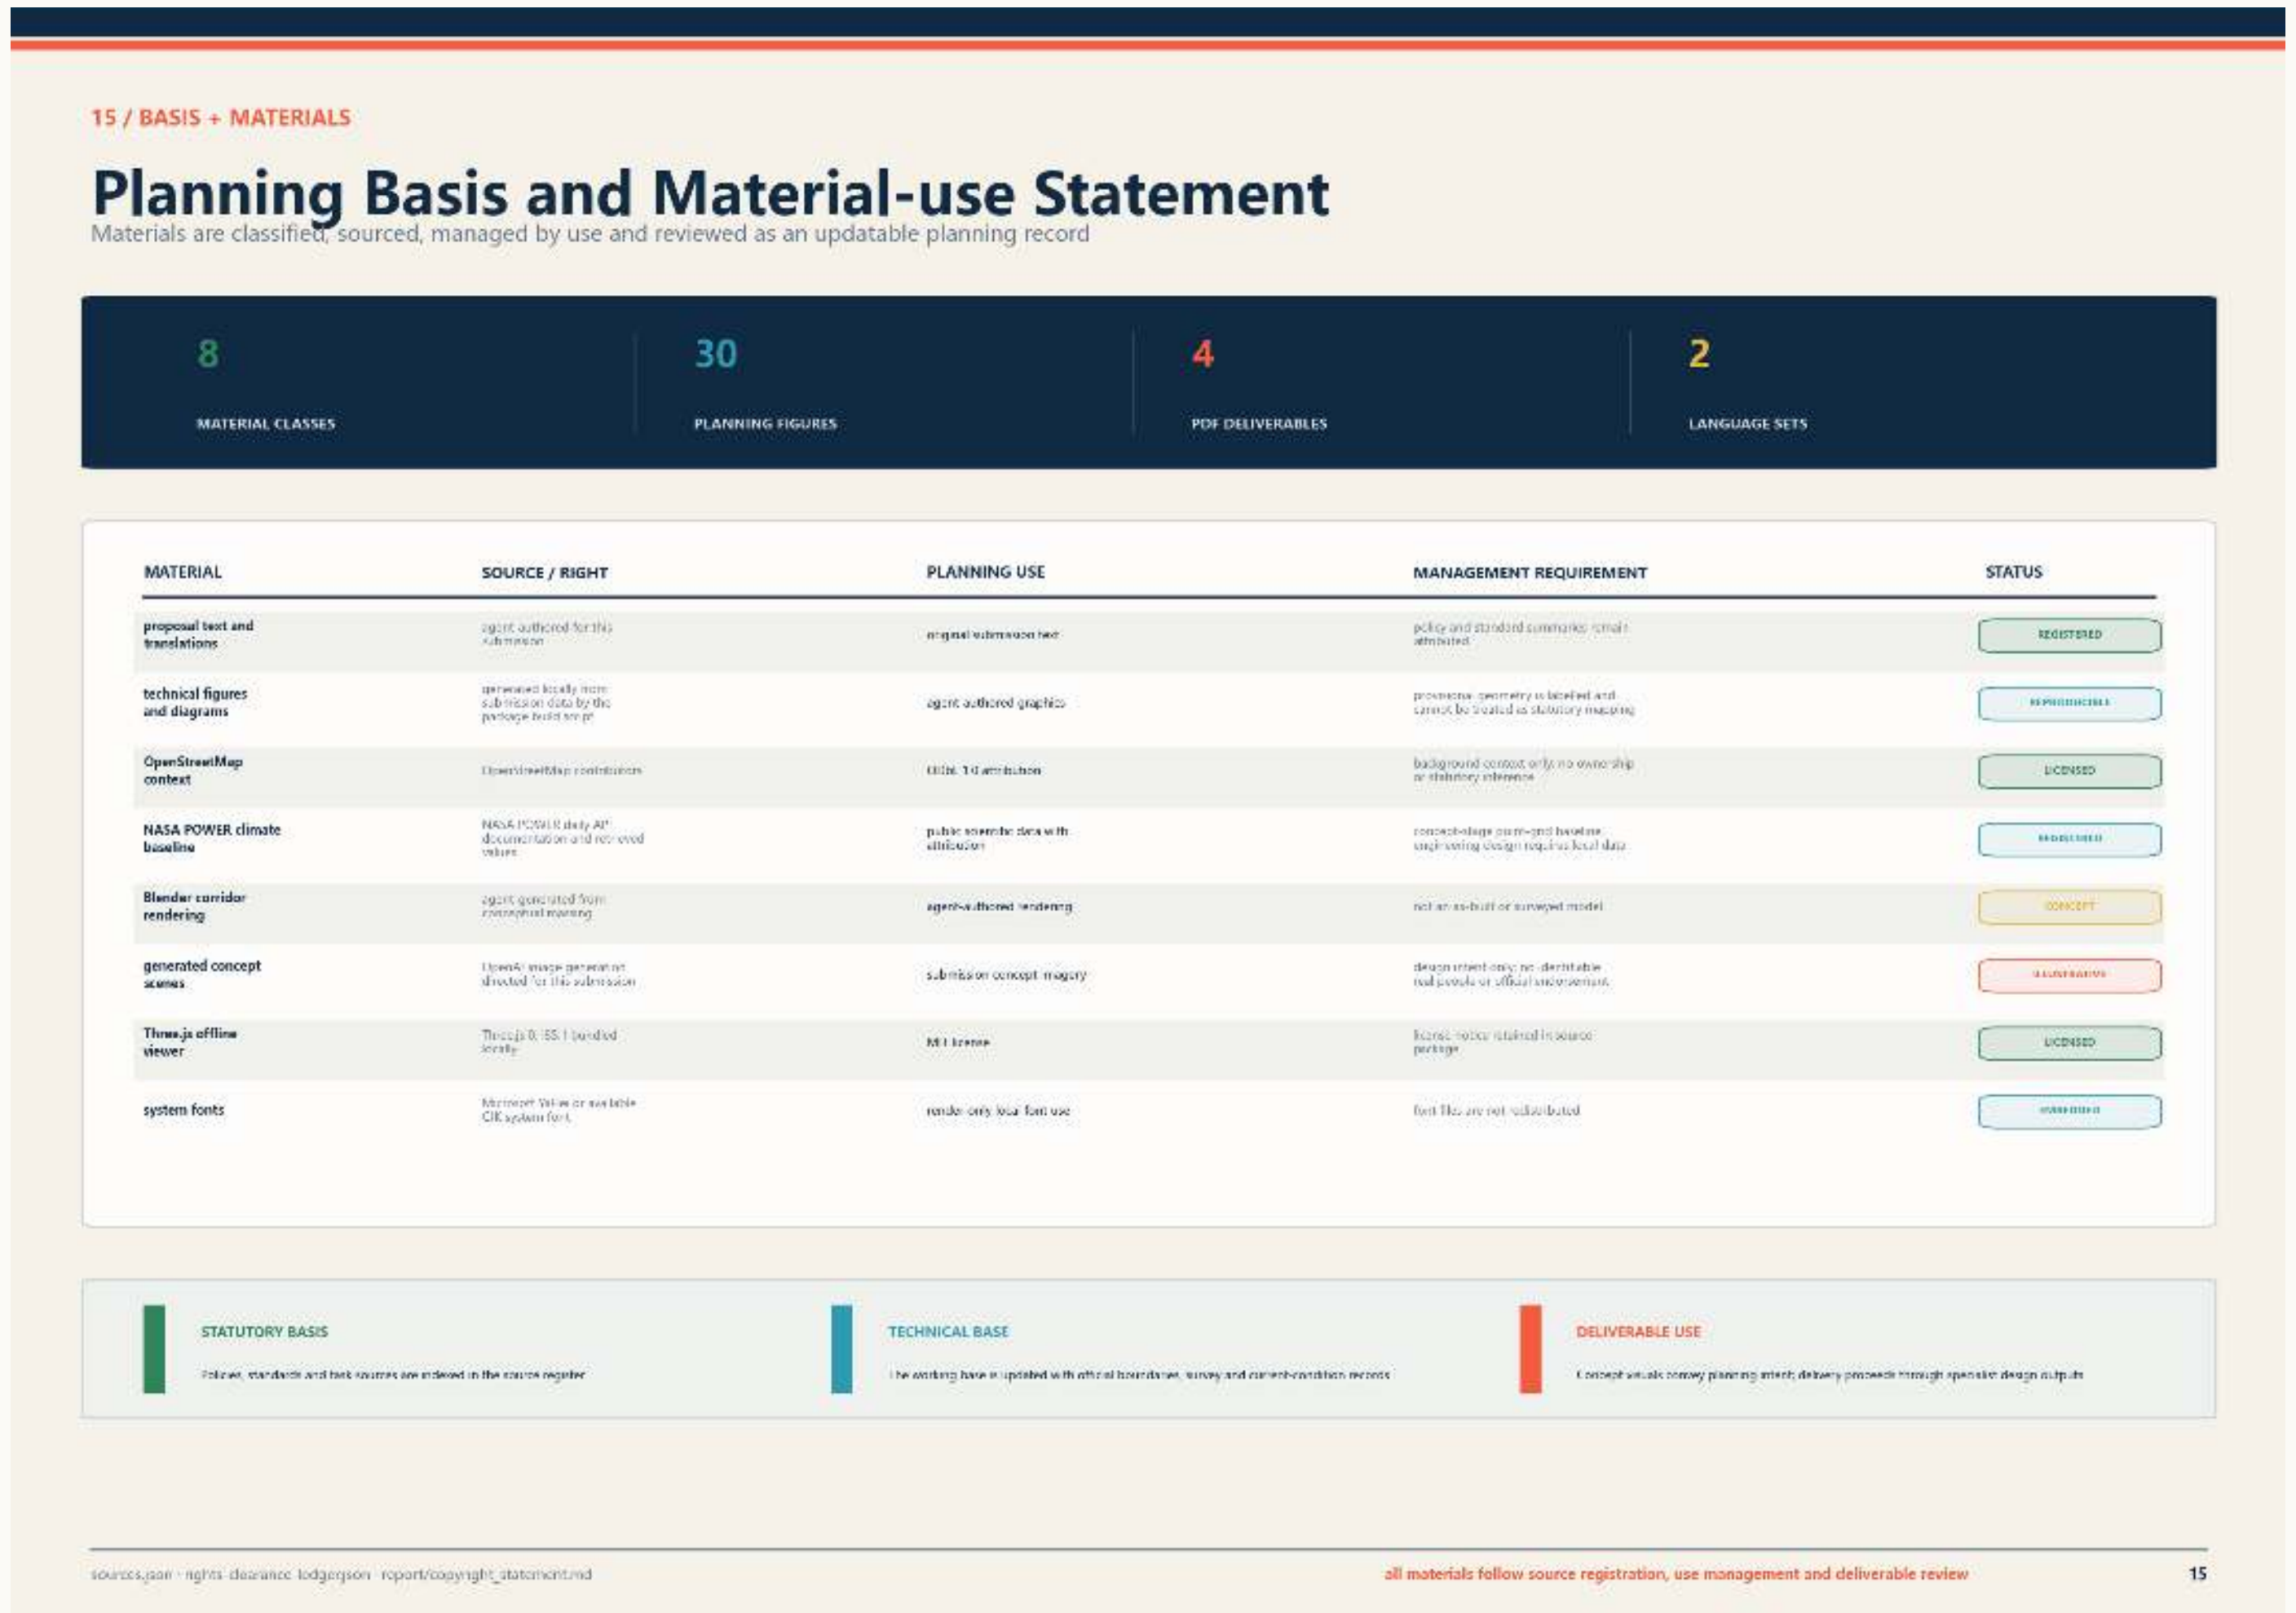

rights / source / clearance status

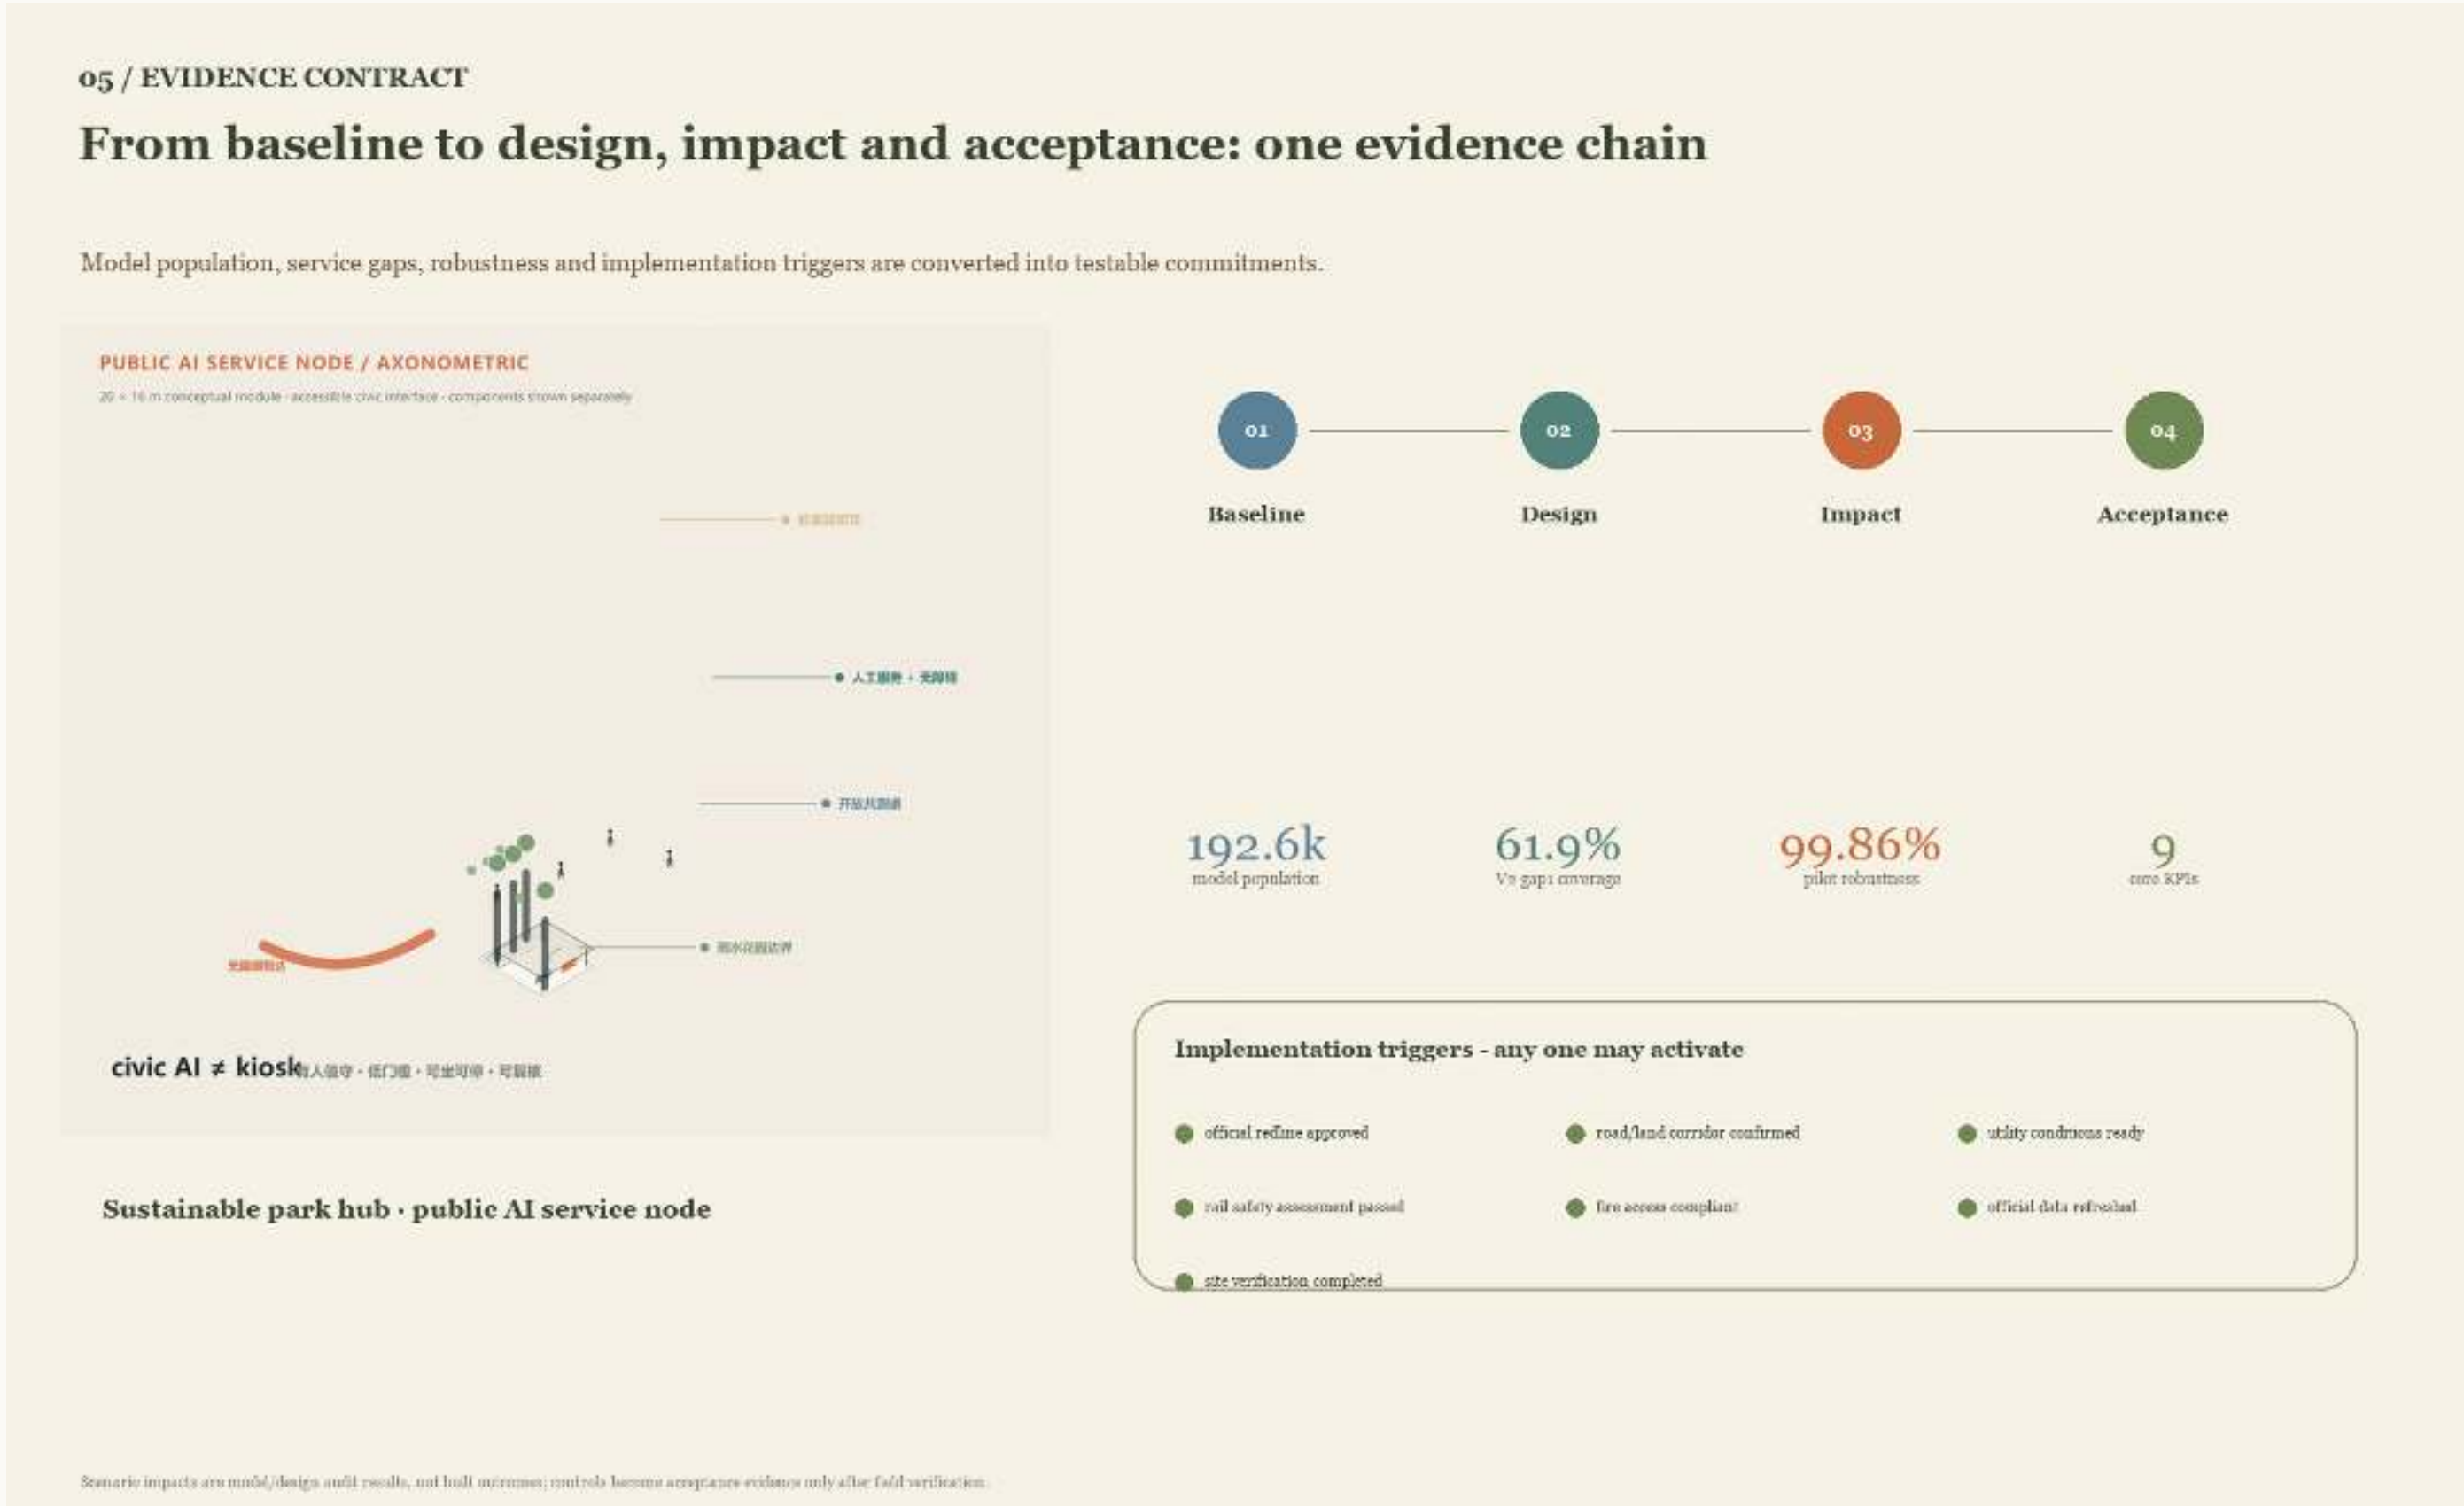

observed → response → impact → re-evaluation