

JING-ZHANG AT REAL SCALE • 2026

THE SHARED FLOOR

REPLACE THE MODEL, NOT THE CITY

ONE SHARED GROUND

SEVEN RAIL CIVIC ROOMS

THREE LONG-LIFE FRAMES

FOUR SEASONS OF PUBLIC LIFE



JURY SUMMARY


One project, not a gallery of alternatives. Public ground is the civic asset; long-life support hosts replaceable infill; AI equipment must be removable.

Why it is distinct: court, cloister and hall are real spatial orders; embodied AI and care enter the architecture together; public service survives a digital outage.

Hard gates: life safety, accessibility, public continuity, support/infill separation and rebinding. Any failure rejects the design rather than being averaged away.

THE SHARED FLOOR / THE REAL CITY IS THE GROUND

SEVEN LOCAL FIGURE-GROUNDS; DATA GAPS ARE NOT FILLED BY ASSUMPTION

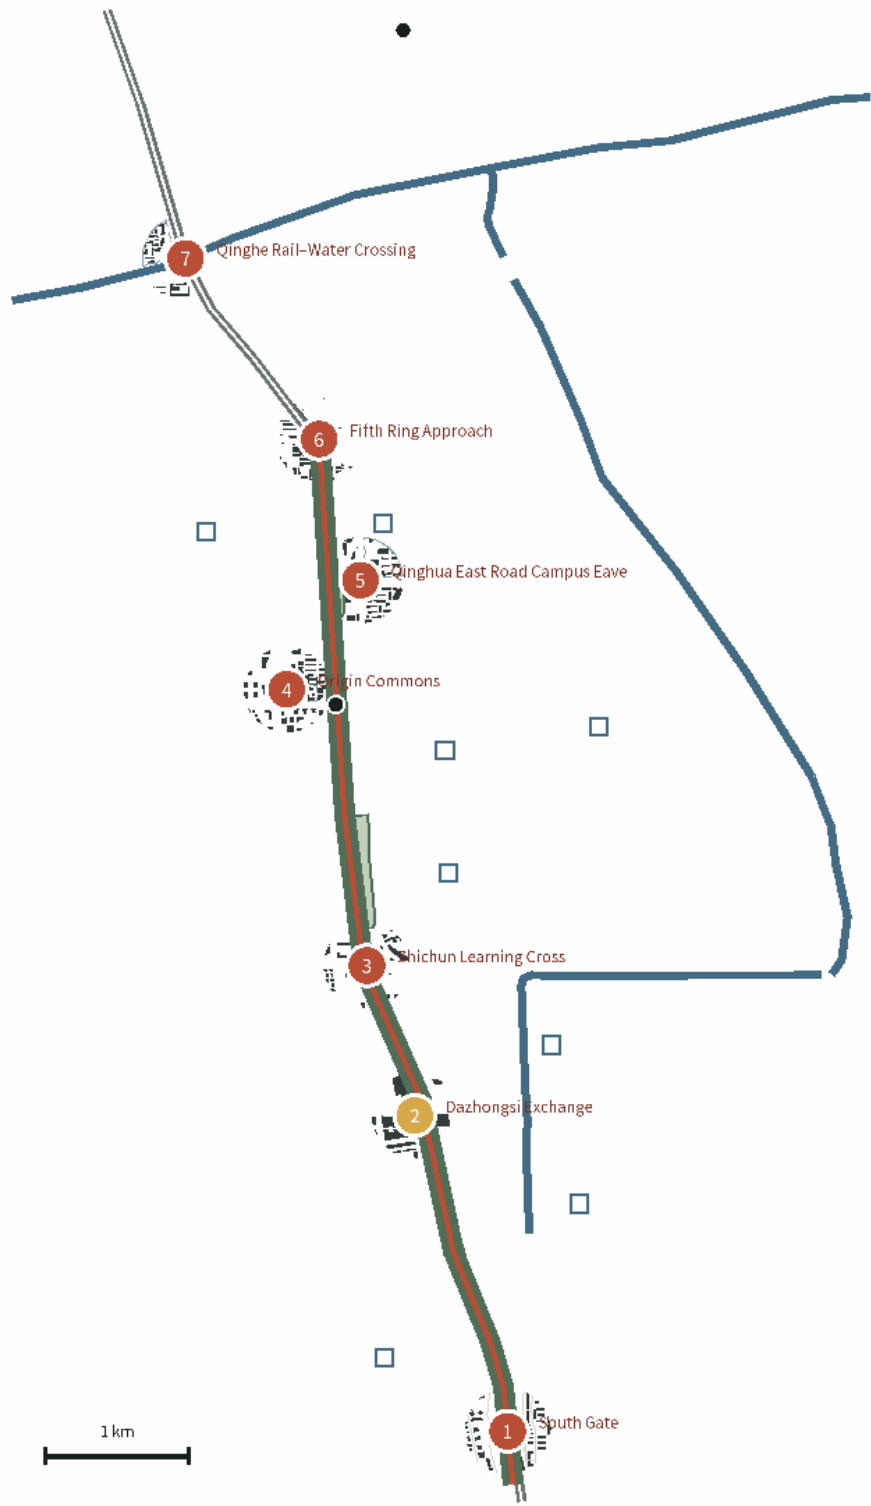

© OpenStreetMap contributors • ODbL 1.0 • MORPHOLOGY + ATTACHMENT READING ONLY
NOT A STATUTORY MAP, REDLINE, PARCEL, SURVEY, BUILDING INVENTORY, ACCESS AGREEMENT OR NAVIGATION PRODUCT

SCOPE + EVIDENCE

43.6 km²

research / official approximate

DARK-OSM BUILDING UNION • FIN

C1 • South Gate

C3 • Zhichun Learning Cross

C5 • Qinghua East Road Camp

C7 • Qinghe Rail-Water Cross

Jing-Zhang Park is treated as civic ground already—not a blank site.

The project works at real corridor interfaces: campus, community, transit, heritage, rivers and service.

GEOMETRIC SUN + SHADE

99/97%

Proof route summer architecture shade: mean/worst

3.13h / 67%

Origin courts winter: mean sun potential / area ≥2h

38/37%

Exchange approaches summer architecture shade: mean/worst

180×40

orientation×height×tree variants × solar positions

NREL SPA / pvlib • 1m grid + 0.5/2m convergence • buildings + typed roofs • seasonal roofs absent in winter • geometry only; not statutory insolation/daylight/energy/UTCI.

CLOSE BEFORE ISSUE

- 01 official boundary + parcels
- 02 FAR, height + setbacks
- 03 existing fabric + heritage controls
- 04 utilities, fire + geotechnics
- 05 quantities, cost + operating contract

EVIDENCE CHAIN



STOP GATE: UNTIL REDLINE + TITLE, METRO/UTILITY PROTECTION, FIRE, STRUCTURE, MEP, NAMED OPERATOR + 12-MONTH OPEX RESERVE EXIST—NO BUILD, NO OPEN.

REFERENCE DESIGN; NOT LOCAL APPROVAL.

Official / provisional / authored / unknown remain separate.

A 412.5 m boundary conflict is disclosed; official polygons trigger rebinding.

SCOPE + EVIDENCE STATUS

43.6 km²

research / official approximate

11.4 km²

overall design / official approximate

368.4 ha

three key areas / official approximate

DARK=OSM BUILDING UNION • FINE=STREET • RED=RAIL • BLUE=WATER/GATE • ●=STATION • □=CAMPUS CENTROID • NUMBER=CANDIDATE

C1 • South Gate



BEIJING NORTH + CURRENT/FORMER RAIL TERMINUS


HERITAGE THRESHOLD

FORECOURT, HERITAGE + FLOW SURVEY REQUIRED

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 44 BUILDING / 13 STREET RECORDS

C2 • Dazhongsi Exchange



STATION + RAIL + FOUR-QUADRANT FRACTURE


P0 STATION PORCH; NIGHT ROOM CONDITIONAL

TITLE, METRO, FIRE + OPERATOR

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 12 BUILDING / 48 STREET RECORDS

C3 • Zhichun Learning Cross



STATION + RAIL + LEARNING DISTRICT

ZHICHUN LEARNING CROSS

7-DAY FLOW, ACCESS + CORNER SURVEY

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 39 BUILDING / 94 STREET RECORDS

C4 • Origin Commons



FORMER-RAIL/PARK CONNECTOR + DAILY LIFE

ORIGIN COMMONS / CARE PORCH

HERITAGE, LOCAL NEED + OPERATOR AGREEMENT

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 68 BUILDING / 170 STREET RECORDS

C5 • Qinghua East Road Campus Eave



STATION + CAMPUS CENTROID; GATE NOT CAPTURED

NEGOTIATED CAMPUS GATE

EXACT GATE, SECURITY + CAMPUS AGREEMENT

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 51 BUILDING / 90 STREET RECORDS

C6 • Fifth Ring Approach



CURRENT/FORMER RAIL NEAR FIFTH RING; ROAD SEAM UNVERIFIED

RIDER DOCK / SERVICE FORECOURT

ROAD, LOADING, FIRE + LAND SURVEY

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 49 BUILDING / 128 STREET RECORDS

C7 • Qinghe Rail-Water Crossing



CURRENT RAIL × QINGHE

SPONGE CROSSING

HYDROLOGY, RAIL, DRAINAGE + FLOOD REVIEW

EXPERT | RESIDENT → GAP=REVISE

MAPPED: 31 BUILDING / 48 STREET RECORDS

JING-ZHANG EVIDENCE LINE



1909 RECORDS—NOT C1-C7 SITE EVIDENCE

● ARCHIVE / RECORD

● FIELD / SURVEY

● P0 / REVERSIBLE PILOT

● SAME INDICATORS / EXP+RES

● ADOPT • REVISE • RETIRE


INHERIT THE METHOD, NOT THE FORM • NO SCORING YET

CREDIT: TONGSHENG PHOTO STUDIO, JING-ZHANG LU GONG CUO YING, 1909 • ORIGINAL NLC • WDL/LOC • LCCN 2021668851

43.6 km² research field.

11.4 km² shared-floor grammar.

Three provisional reference areas for architectural depth.

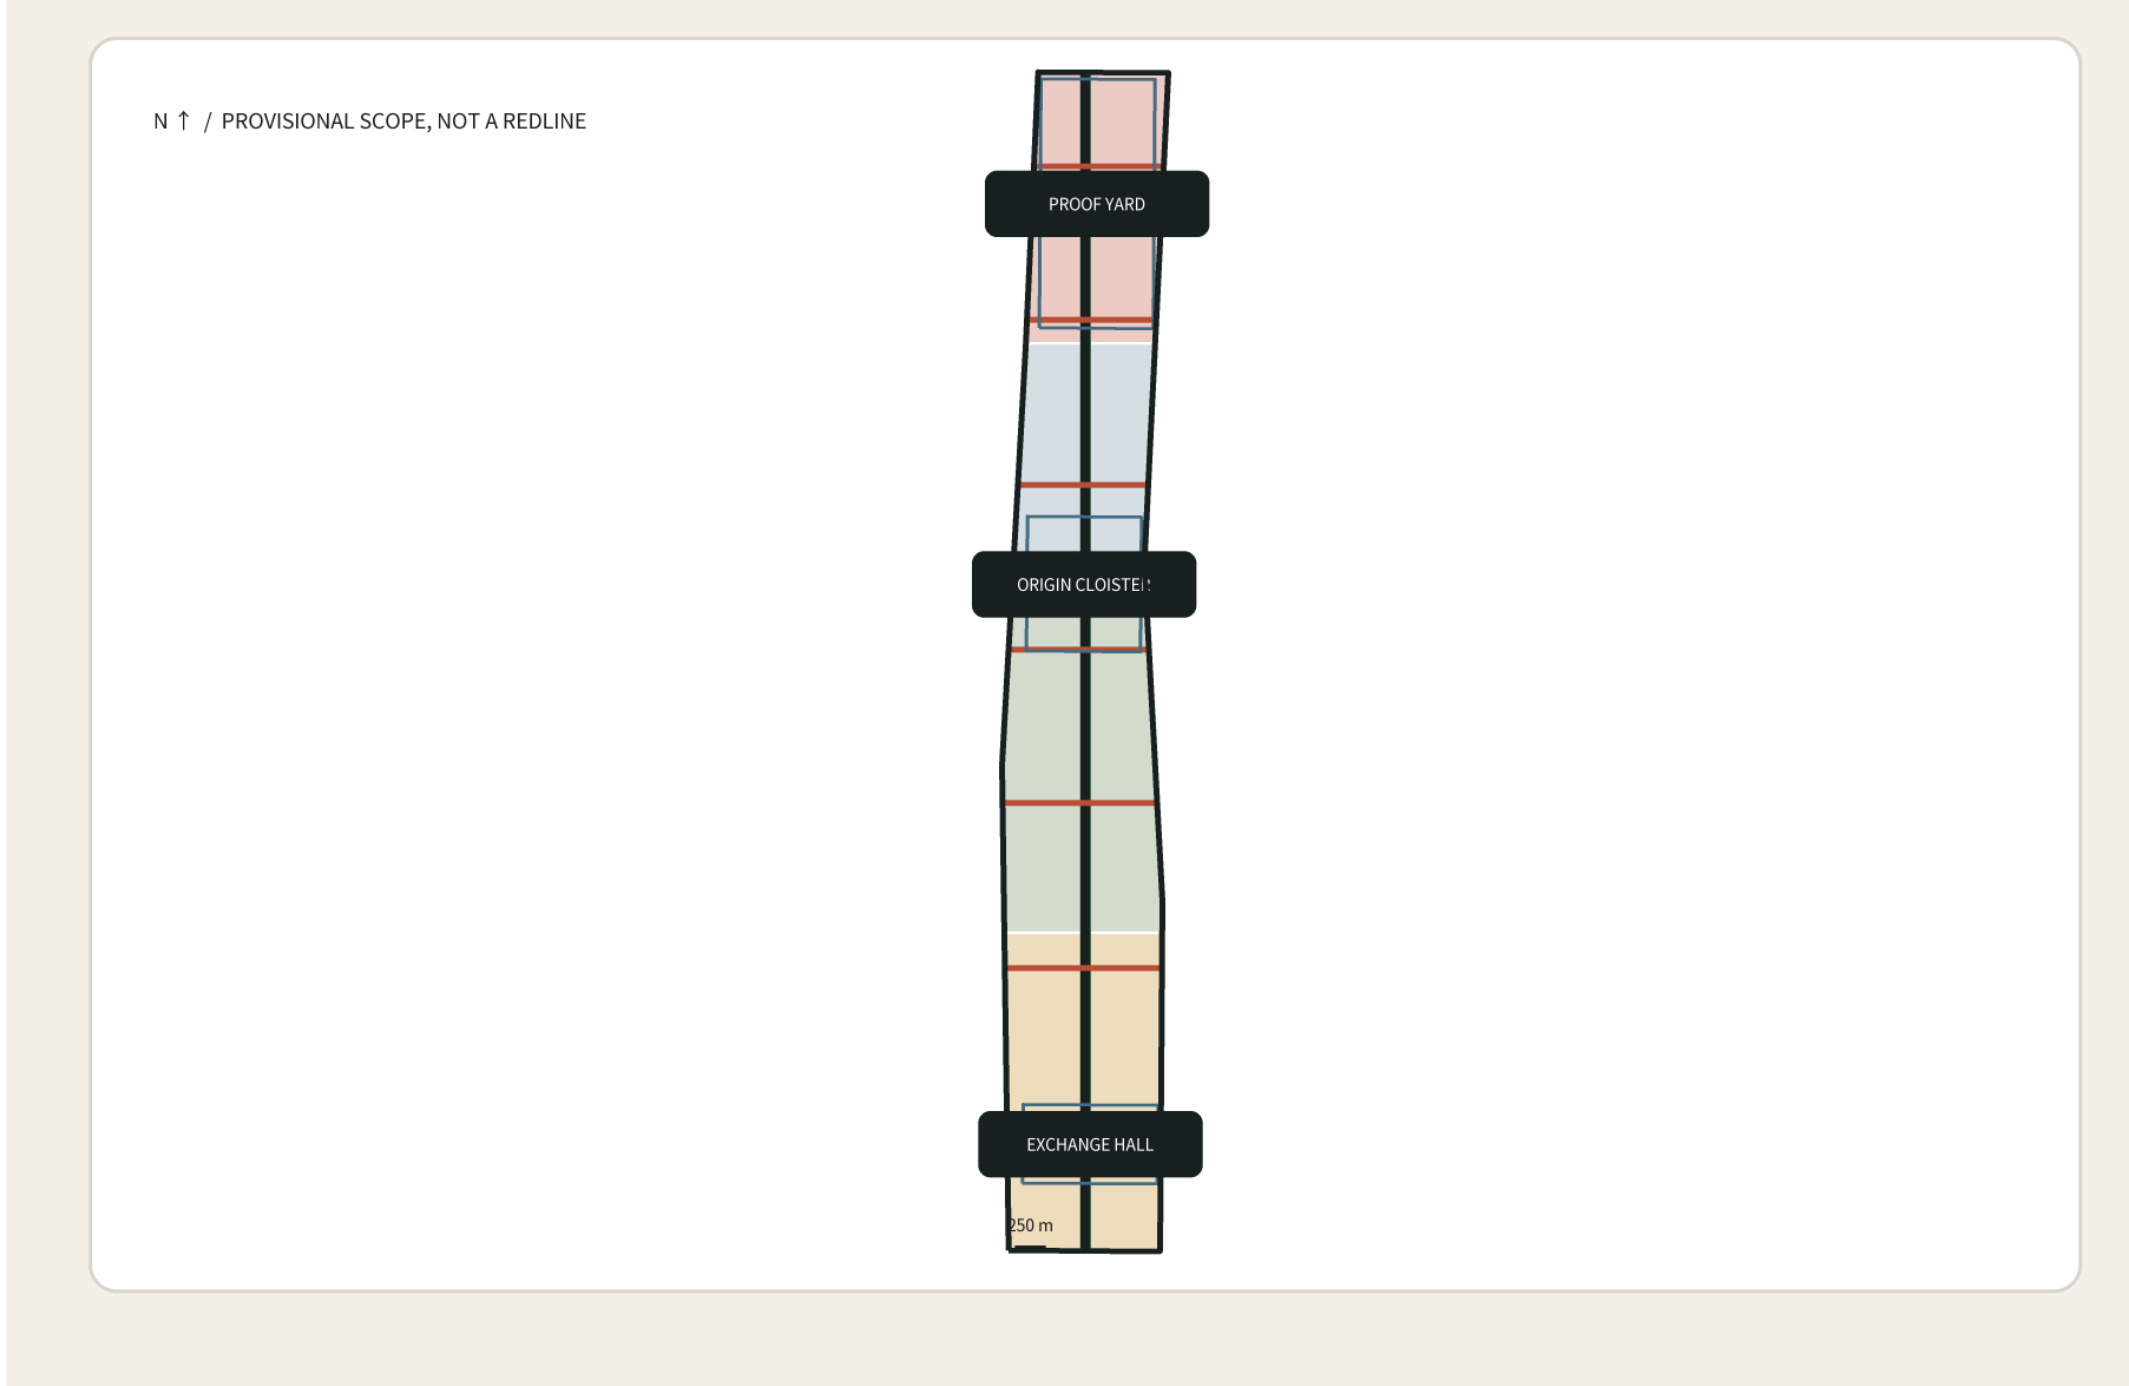

The completed park and rail memory form the public-ground reference.

Long-life frames attach at interfaces; they do not claim an official redline.

JING-ZHANG EVIDENCE LINE



LINE



STATION



WATER



BUILD

1909 RECORDS—NOT C1-C7 SITE EVIDENCE



ARCHIVE / RECORD



FIELD / SURVEY



P0 / REVERSIBLE PILOT



SAME INDICATORS / EXP+RES



ADOPT • REVISE • RETIRE

INHERIT THE METHOD, NOT THE FORM • NO SCORING YET

CREDIT: TONGSHENG PHOTO STUDIO, JING-ZHANG LU GONG CUO YING, 1909 • ORIGINAL NLC • WDL/LOC • LCCN 2021668851

Each room follows archive → field evidence → reversible pilot → same-indicator expert and resident review → adopt, revise or retire.

No scoring has yet occurred; every address remains provisional until survey, operator and access agreement exist.

THREE KEY AREAS / THREE URBAN TYPES

COURT • CLOISTER • HALL

ONE TEMPORAL AND CONSTRUCTION DNA; THREE DISTINCT SPATIAL FORMS

03

One temporal and construction DNA.

Three deliberately different urban relationships.

ZHONGZHIYUAN • PROOF YARD

Proof Yard

COURT / controlled proof visible to the public

PUBLIC INFUSE

STAFFED CAVE

BOUNDED / CONNECTED

CONTROLLED

N ↑

PUBLIC GROUND — CLIMATE EDGE — LONG-LIFE SUPPORT — REPLACEABLE INFILL

DEMOUNTABLE EAVE • VISIBLE DRAINAGE • FREEZE/THAW ACCESS

CERTIFIED LONG-LIFE 6 M SUPPORT → BOLTED SECONDARY FRAME → DRY REPLACEABLE INFILL INSPECTABLE SERVICE BAND

REPAIR / REPAIR / INSERT

retain usable frame • repair public threshold • insert reversible first bay

FIRST PILOT

observation cloister • isolated test cell

OPERATOR

test safety lead • independent checker

STOP RULE

stop on boundary breach, failed replay or unsafe continuation

CANDIDATE PLACEMINT • OPTICAL EXTENTS TRIGGER REVIEW • REBUILD

AI ORIGIN • ORIGIN CLOISTER

Origin Cloister

CLOISTER / a retrofit-first campus-community weave

PUBLIC INFUSE

STAFFED CAVE

BOUNDED / CONNECTED

CONTROLLED

N ↑

PUBLIC GROUND — CLIMATE EDGE — LONG-LIFE SUPPORT — REPLACEABLE INFILL

DEMOUNTABLE EAVE • VISIBLE DRAINAGE • FREEZE/THAW ACCESS

RETAIN AND CERTIFY EXISTING FRAME FIRST → INDEPENDENT BOLTED PLUG-IN → DRY 3.2 M INFILL COORDINATION → EXPOSED MAINTAINABLE SERVICE STRIP

REPAIR / REPAIR / INSERT

retain campus/community stock • repair access • insert porous cloister

FIRST PILOT

negotiated gate • care court

OPERATOR

campus-community joint operator

STOP RULE

no build without access agreement and care operator

CANDIDATE PLACEMINT • OPTICAL EXTENTS TRIGGER REVIEW • REBUILD

DAZHONGSI • EXCHANGE HALL

Exchange Hall

HALL / four public entrances and one all-weather room

PUBLIC INFUSE

STAFFED CAVE

BOUNDED / CONNECTED

CONTROLLED

N ↑

PUBLIC GROUND — CLIMATE EDGE — LONG-LIFE SUPPORT — REPLACEABLE INFILL

DEMOUNTABLE EAVE • VISIBLE DRAINAGE • FREEZE/THAW ACCESS

LONG-LIFE 8 M PRIMARY FRAME → DEMOUNTABLE ROOF CASSETTES → REPLACEABLE MARKER / SERVICE INFILL → INSPECTABLE PERIMETER SERVICE BAND

REPAIR / REPAIR / INSERT

survey retain/repair/insert • repair four-quadrant walking • add all-weather eave

FIRST PILOT

station porch • Rider Dock • staffed help desk

OPERATOR

local authority • transit • Shared Floor operator

STOP RULE

no scale-up before movement, ownership, fire and cost evidence

CANDIDATE PLACEMINT • OPTICAL EXTENTS TRIGGER REVIEW • REBUILD

REFERENCE ARCHITECTURE • OFFICIAL POLYGONS TRIGGER REVIEW, RECALCULATION + REISSUE

换模型，不换城市 / REPLACE THE MODEL, NOT THE CITY


LAND-USE STRUCTURE / OPEN BUILDING

FOUR PROGRAMME BANDS; FIVE RENEWAL SPEEDS

CONCEPT LAND USE IS NOT ZONING; GROUND AND SUPPORT ENDURE WHILE SERVICES, INFILL AND EQUIPMENT CHANGE


02

N → • PLAN ROTATED 90° FOR SHEET READING

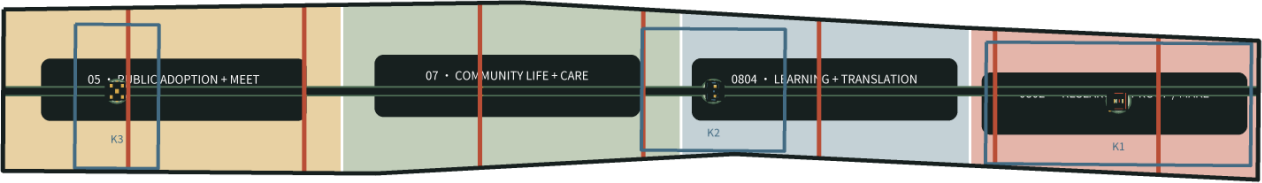


CONCEPT LAND-USE STRUCTURE • NOT STATUTORY ZONING • REVIEW + REBIND ON OFFICIAL CONTROLS
FILL=FOUR PROGRAMME BANDS • DARK=THREE LONG-LIFE FRAMES • GOLD=PUBLIC ROOMS • RED=SEVEN CROSS-INTERFACES

PROGRAMME × DESIGN LIFE

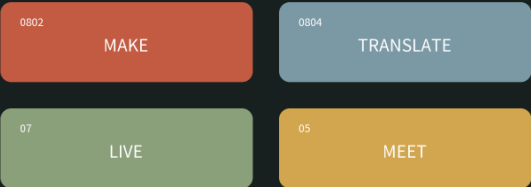

DAZHONGSI • ENCOURAGED SHARED LEVELS



ENCOURAGED ≠ BUILT, OPEN, EASEMENT OR 24H ACCESS

METRO / OWNER / FIRE / STRUCTURE / OPERATIONS ARE GATES

FIVE RENEWAL SPEEDS



KEEP FRAME, CHANGE CORE, KEEP THE LEDGER, TARGETS ARE NOT WARRANTIES.

OFFICIAL EXTENTS • CONTROLS TRIGGER REVIEW, RECALCULATION + REISSUE.


Four authored programme bands are shown spatially; they are not statutory zoning.

Public ground → support → service chassis → infill → equipment.




Public ground and support endure; services, infill and equipment change at different intervals.

Design-life bands are targets, not warranties.

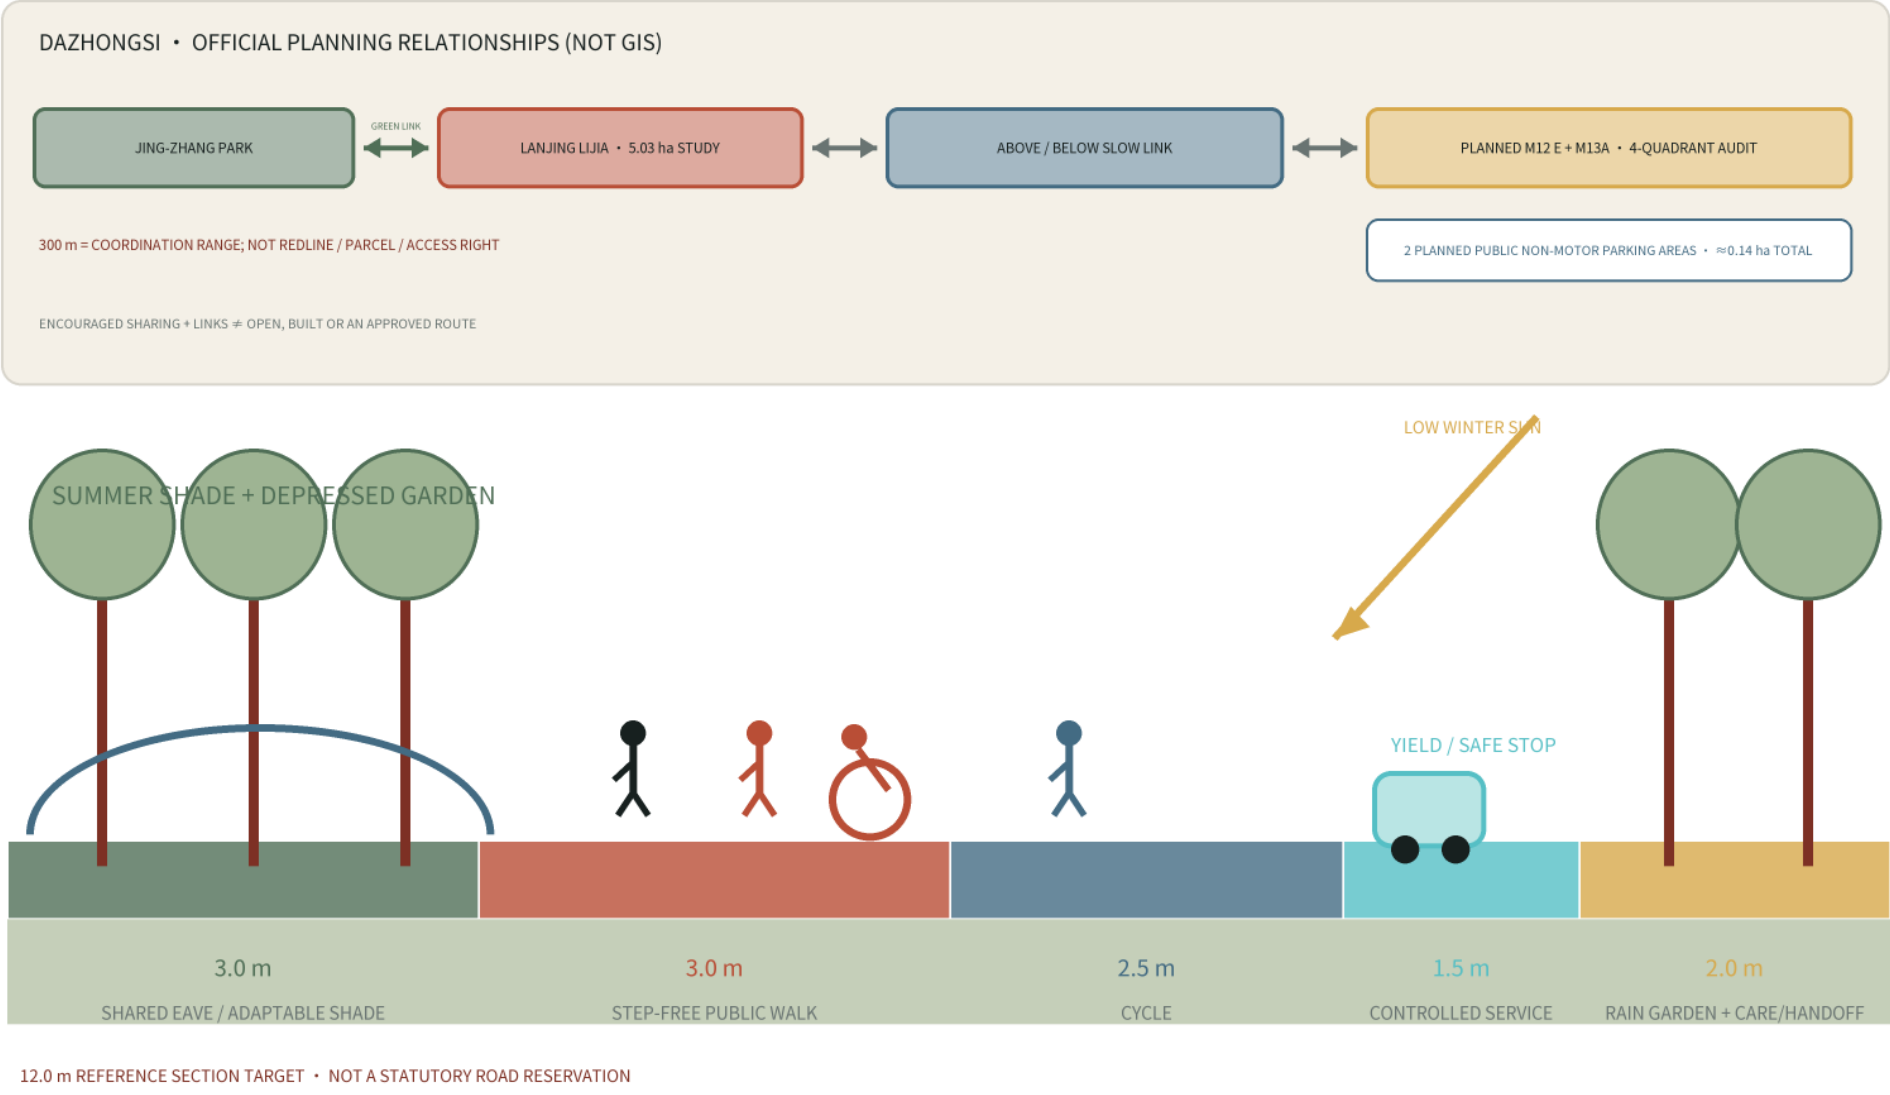

Roof capture → rail-bed bioswale → forebay → garden → reuse → safe overflow.

Beijing checks add winter drain-down, snow storage, freeze-thaw, dust and north-wind protection.

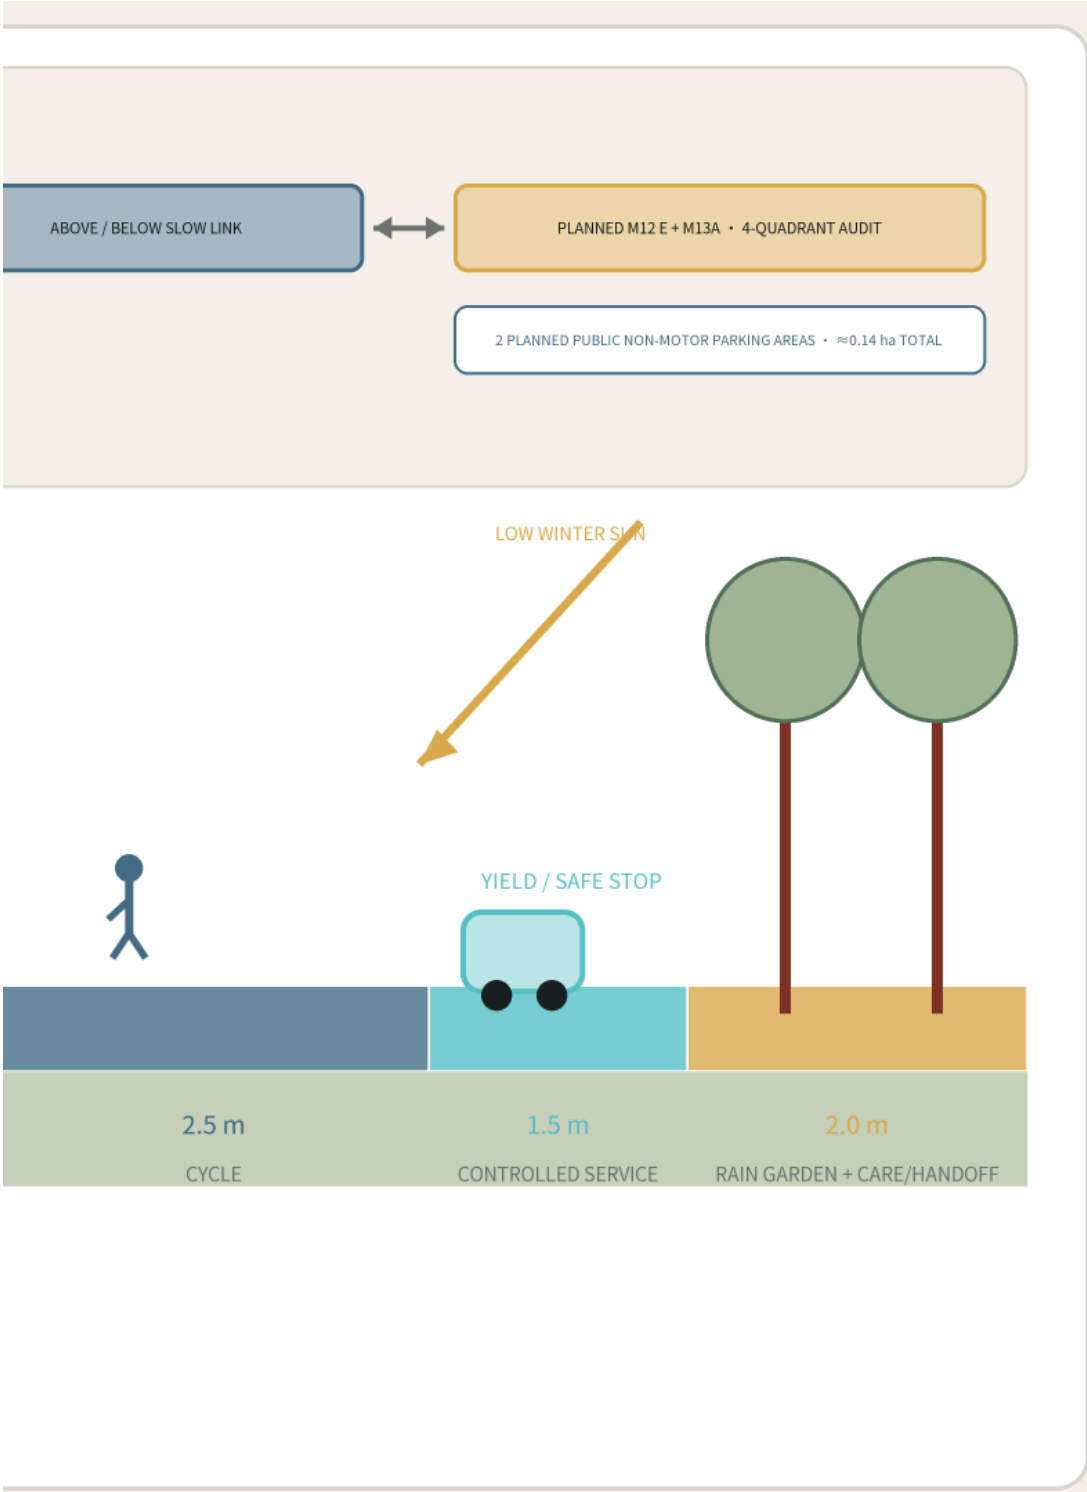

12 AI CARDS / 4 SHOWN

SPACE • OPERATOR • HUMAN FALLBACK

AI01

STEP-FREE TRANSFER CHECK

7 ROOMS • ACCESS

FAIL→PAPER+ESCORT

TEST

AI02

LOW-SPEED DELIVERY TRIAL

YARD • SAFETY

FAIL→CART+STOP

TEST

AI05

CLIMATE-REFUGE OPERATING CUES

EAVES • STEWARD

FAIL→MANUAL CHECK

TEST

AI12

MULTILINGUAL HUMAN HELP DESK

HELP POINT • CIVIC STAFF

FAIL→INTERPRETER

TEST

S01-S15 EVERYDAY-LIFE REHEARSALS

7 PERSONAS • 24H × 4 SEASONS

ALL SEVEN CIVIC ROOMS REQUIRE A 7-DAY FIELD BASELINE

COMPLETE CARDS ≠ PROVEN LOCAL DEMAND OR PERFORMANCE

ROBOTS: LOW SPEED, YIELD, SAFE STOP; HUMAN SERVICE CONTINUES


Fifteen rehearsals cover elders, children, carers, students, riders, service shifts, disability, women at night and no-phone users.

Every local flow, price and access claim remains field-baseline required.



Plan, axon, section and operational passport come from one typed prototype.

All dimensions remain reference design geometry.

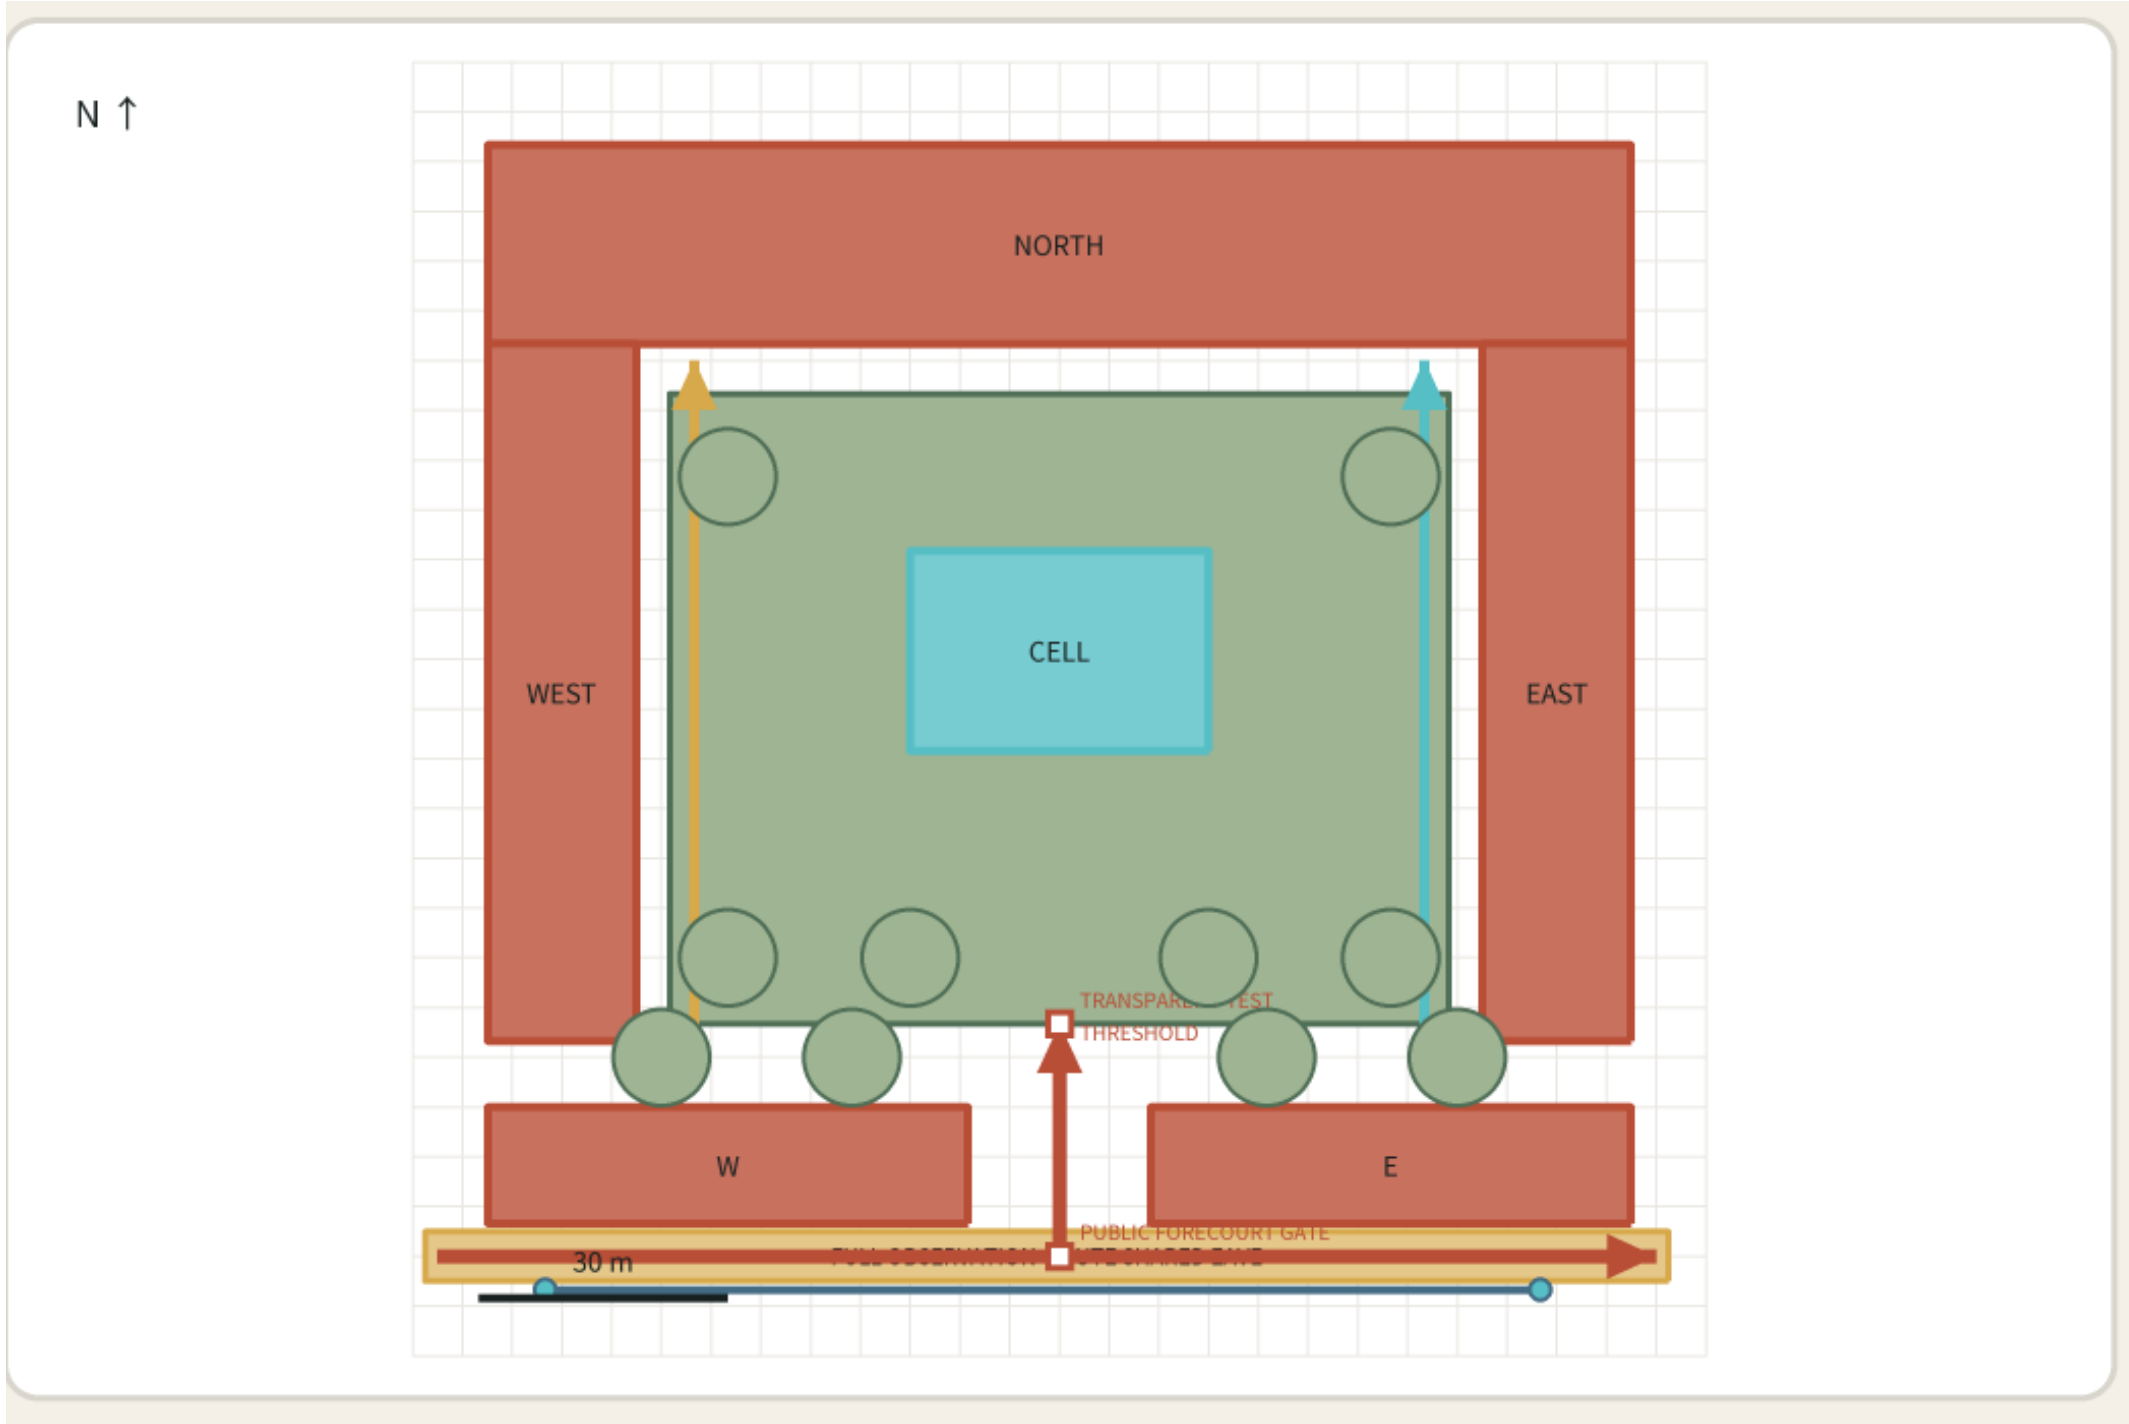


Read public, service and controlled routes together.

North arrow, grid and scale remain visible.

Proof Yard

COURT / controlled proof visible to the public

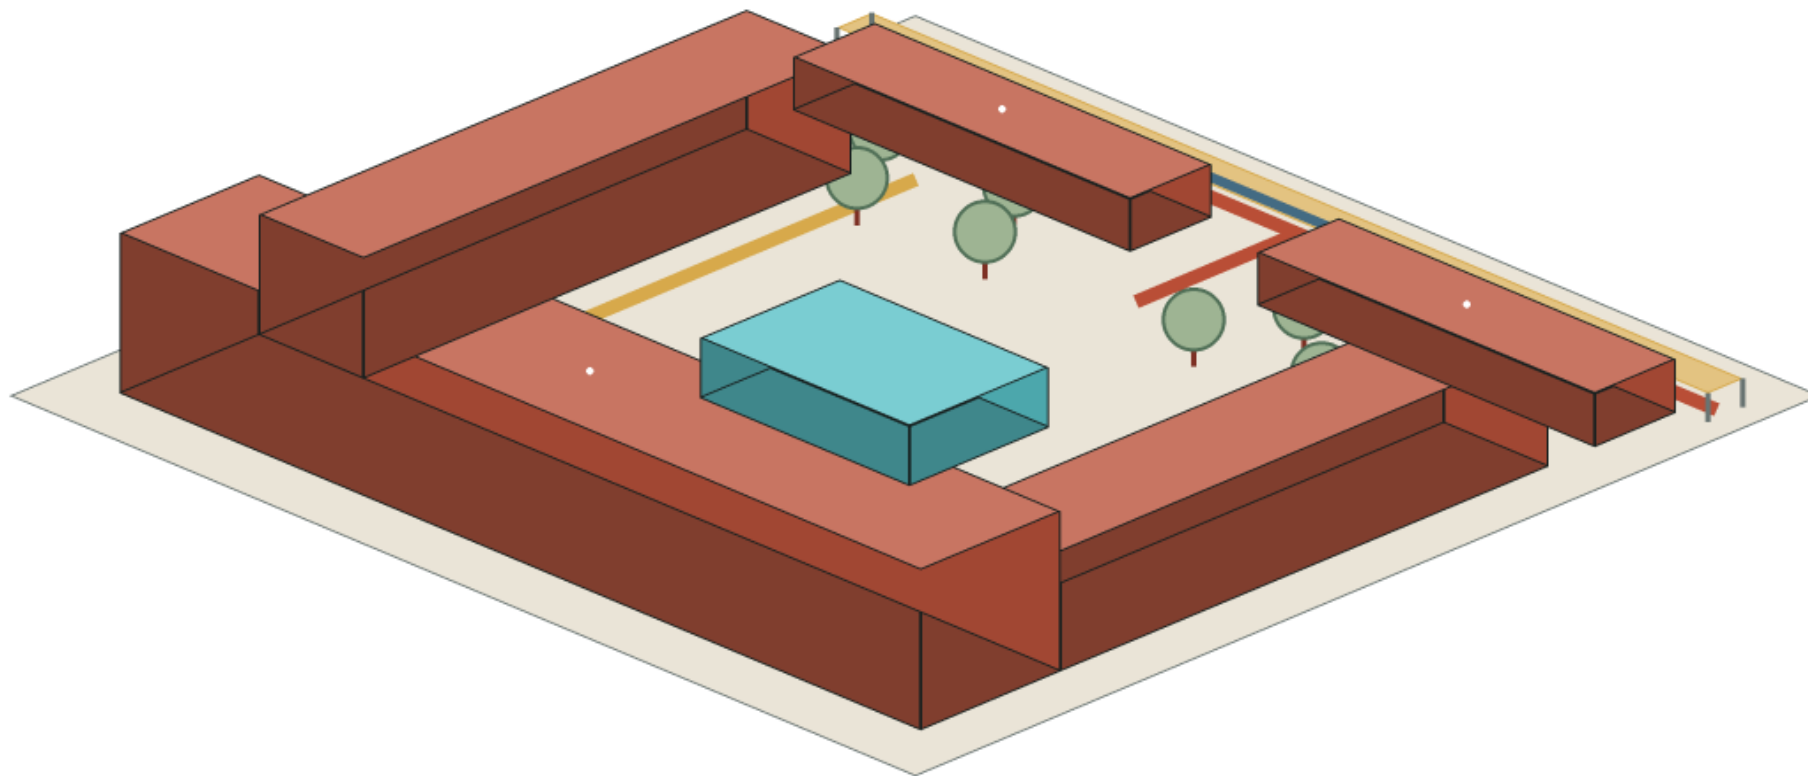

Long-life support and replaceable infill are visually separated.


Sun and climate moves are design hypotheses pending simulation.

SECTION + SHARED EAVE

PUBLIC GROUND — CLIMATE EDGE — LONG-LIFE SUPPORT — REPLACEABLE INFILL

DEMOUNTABLE EAVE • VISIBLE DRAINAGE • FREEZE/THAW ACCESS


CERTIFIED LONG-LIFE 6 M SUPPORT → BOLTED SECONDARY FRAME → DRY REPLACEABLE INFILL → INSPECTABLE SERVICE BAND

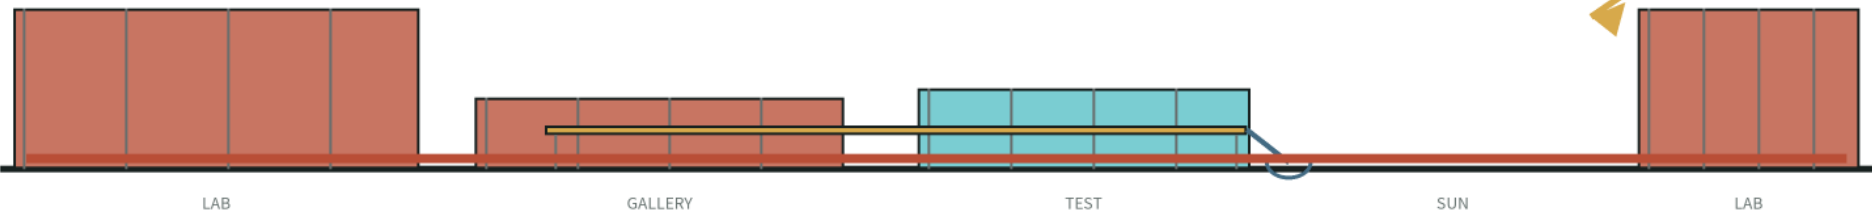

The public floor remains legible through daily change.

Human handoff and safe-stop are spatial provisions, not interface copy.

PUBLIC / SERVICE / CONTROLLED

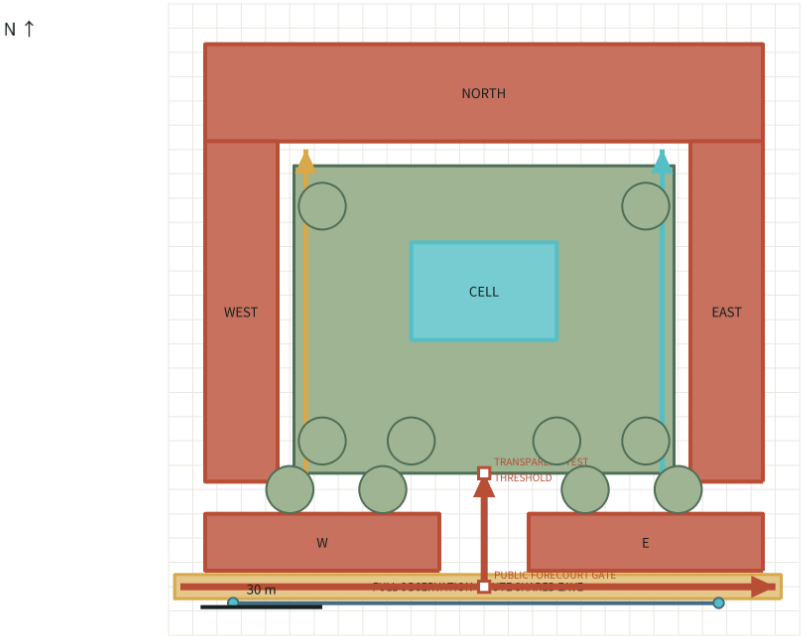

TYPE PASSPORT


TYPE PASSPORT	
CONCEPT GFA	32,768 m ²
SUPPORT / INFILL	7,960 / 864 m ²
THRESHOLDS / MODES	2 / 5
COVERED EDGE / WET NODES	900 m ² / 2
FORECOURT—CLOISTER—THRESHOLD—TEST YARD / SAFE STOP	



Plan, axon, section and operational passport come from one typed prototype.

All dimensions remain reference design geometry.

N ↑

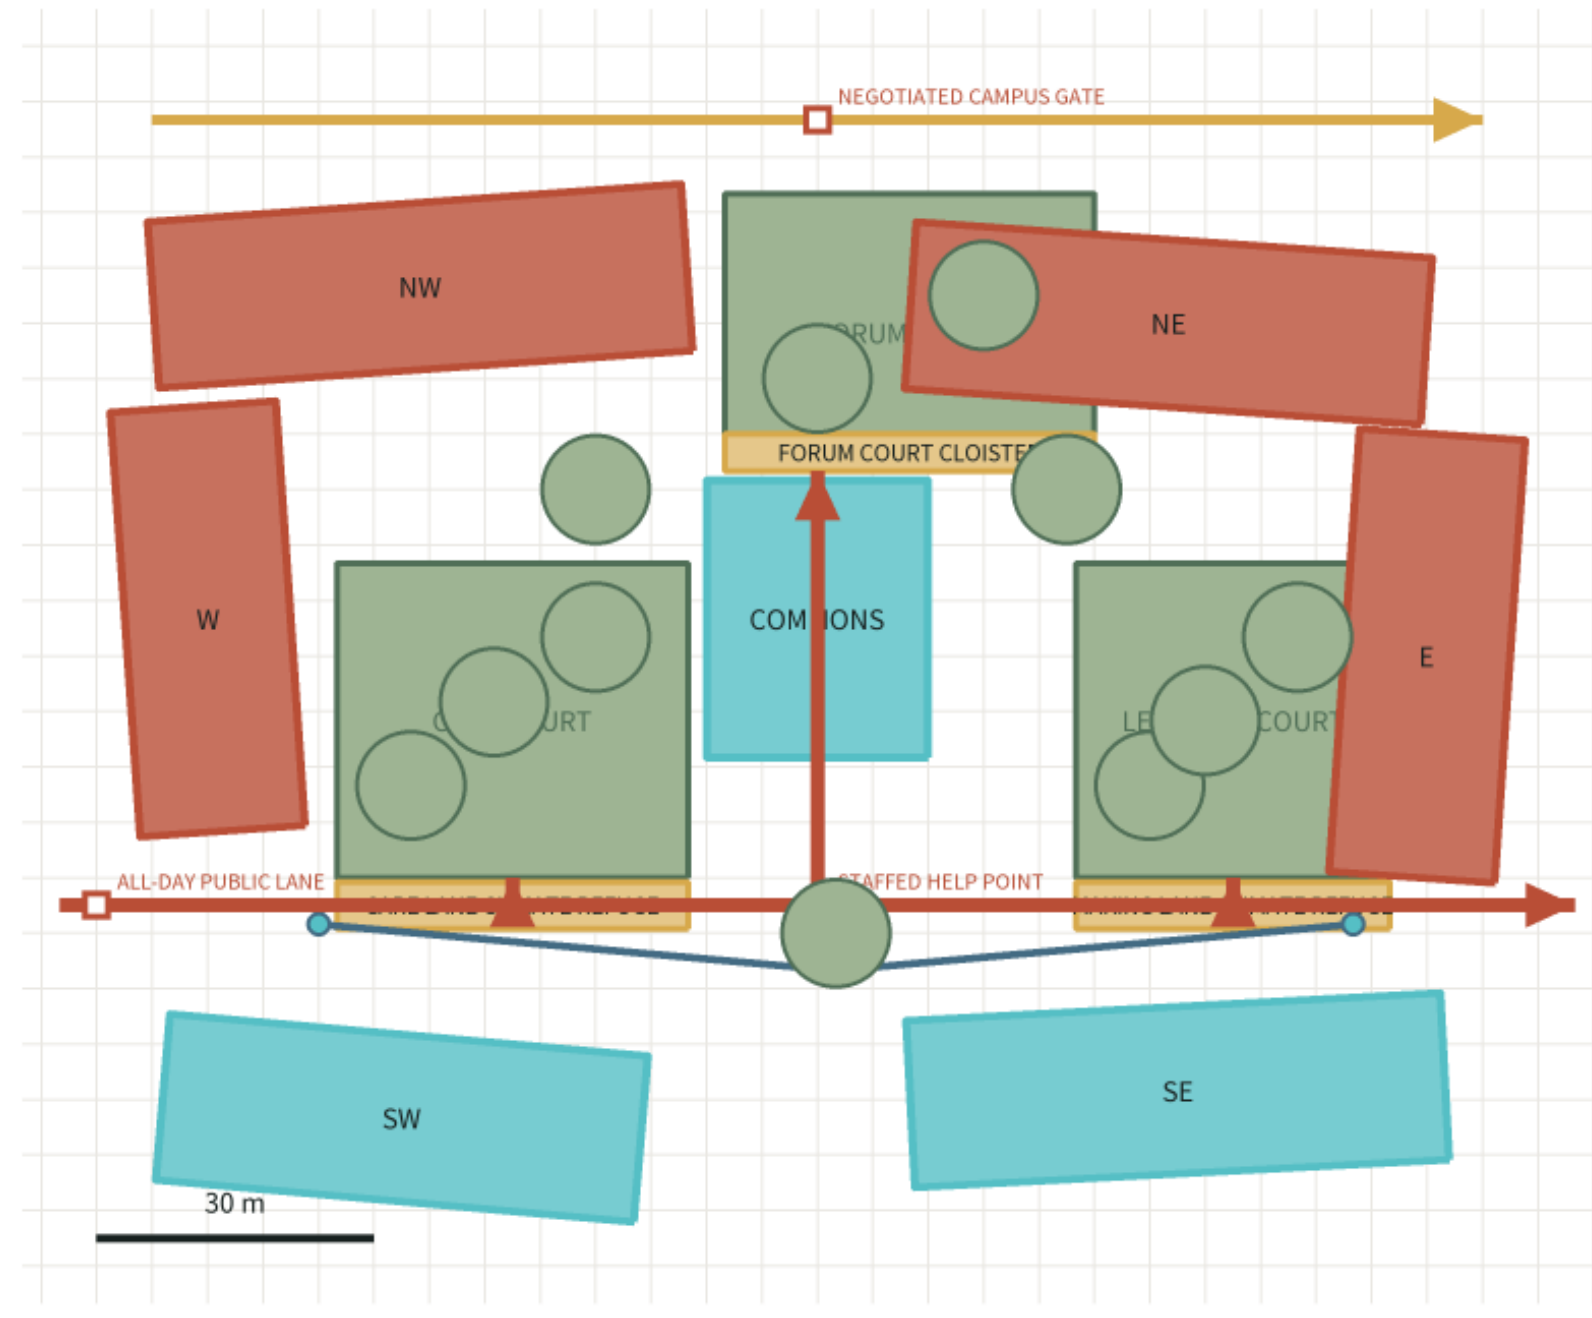


Read public, service and controlled routes together.

North arrow, grid and scale remain visible.

Origin Cloister

CLOISTER / a retrofit-first campus-community weave

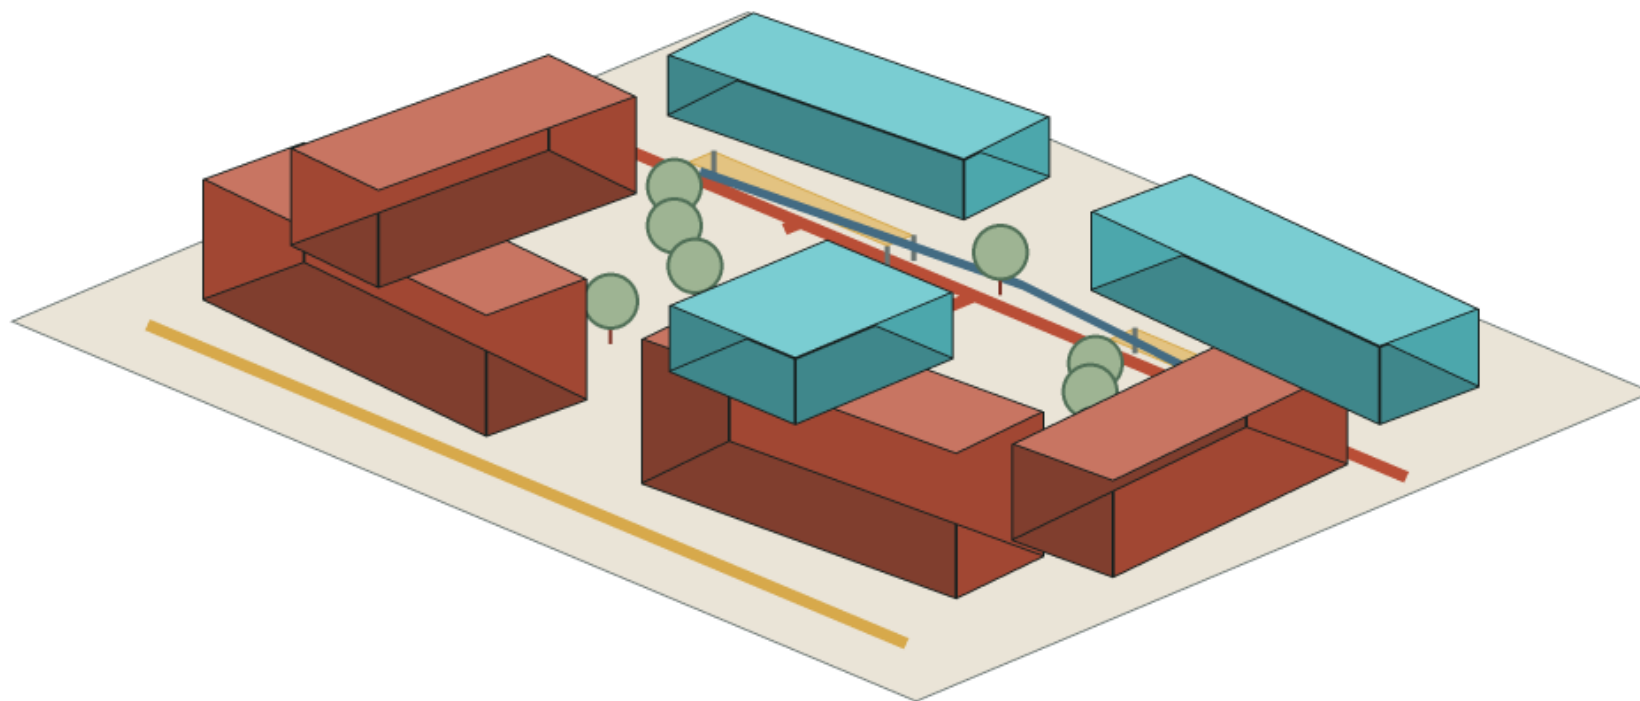

Long-life support and replaceable infill are visually separated.


Sun and climate moves are design hypotheses pending simulation.

SECTION + SHARED EAVE

PUBLIC GROUND — CLIMATE EDGE — LONG-LIFE SUPPORT — REPLACEABLE INFILL

DEMOUNTABLE EAVE • VISIBLE DRAINAGE • FREEZE/THAW ACCESS


RETAIN AND CERTIFY EXISTING FRAME FIRST → INDEPENDENT BOLTED PLUG-IN → DRY 1.2 M INFILL COORDINATION → EXPOSED MAINTAINABLE SERVICE STRIP

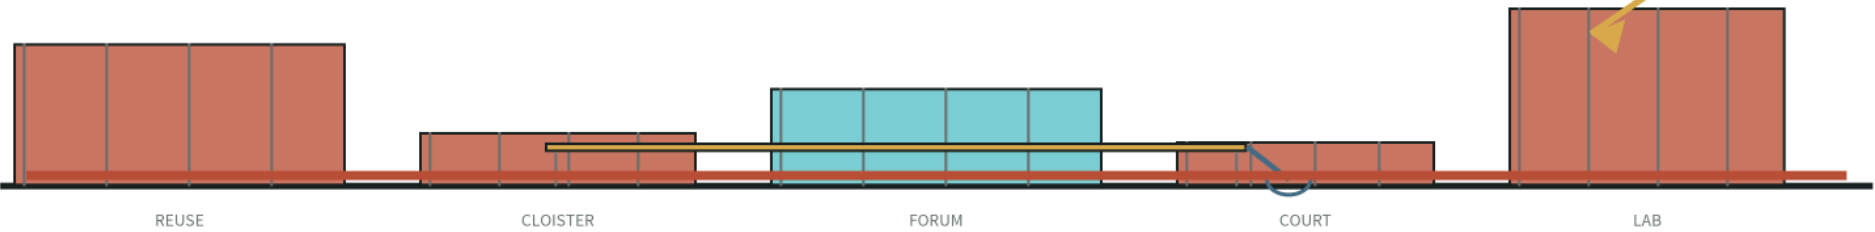

The public floor remains legible through daily change.

Human handoff and safe-stop are spatial provisions, not interface copy.

PUBLIC / SERVICE / CONTROLLED

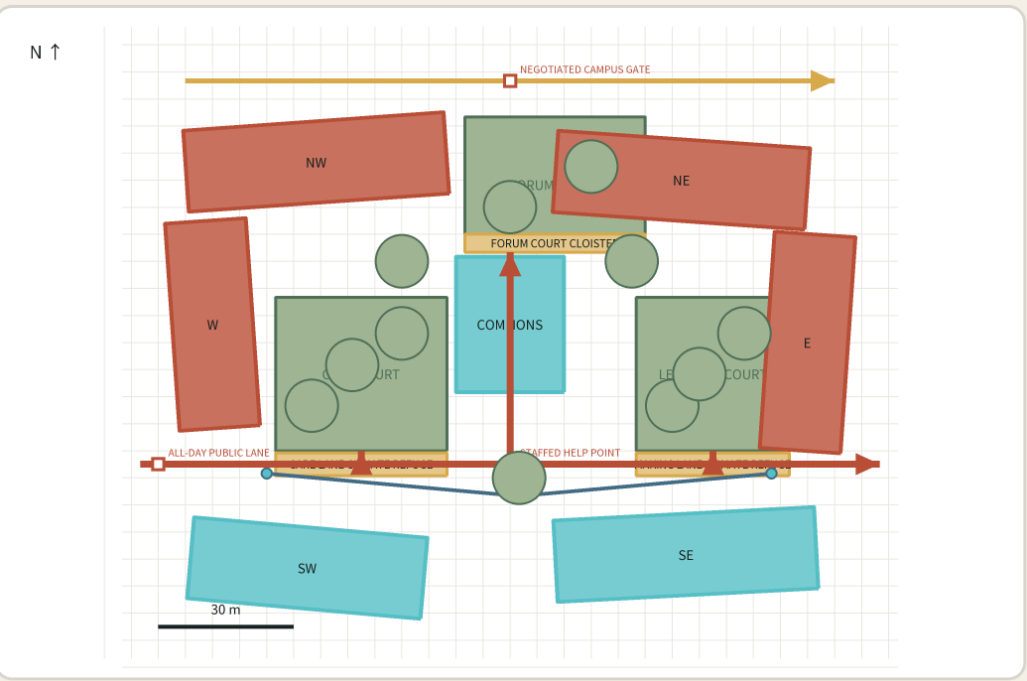


TYPE PASSPORT

TYPE PASSPORT	
CONCEPT GFA	24,480 m ²
SUPPORT / INFILL	3,744 / 2,700 m ²
THRESHOLDS / MODES	3 / 5
COVERED EDGE / WET NODES	520 m ² / 3
PUBLIC LANE / CARE / FORUM / MAKING COURTS / QUIET LOOP	

PLACEMENT SCREEN / 1:500 AT FULL-SIZE A0

OSM MORPHOLOGY—NOT PARCEL, REDLINE, VACANCY OR BUILDABILITY EVIDENCE

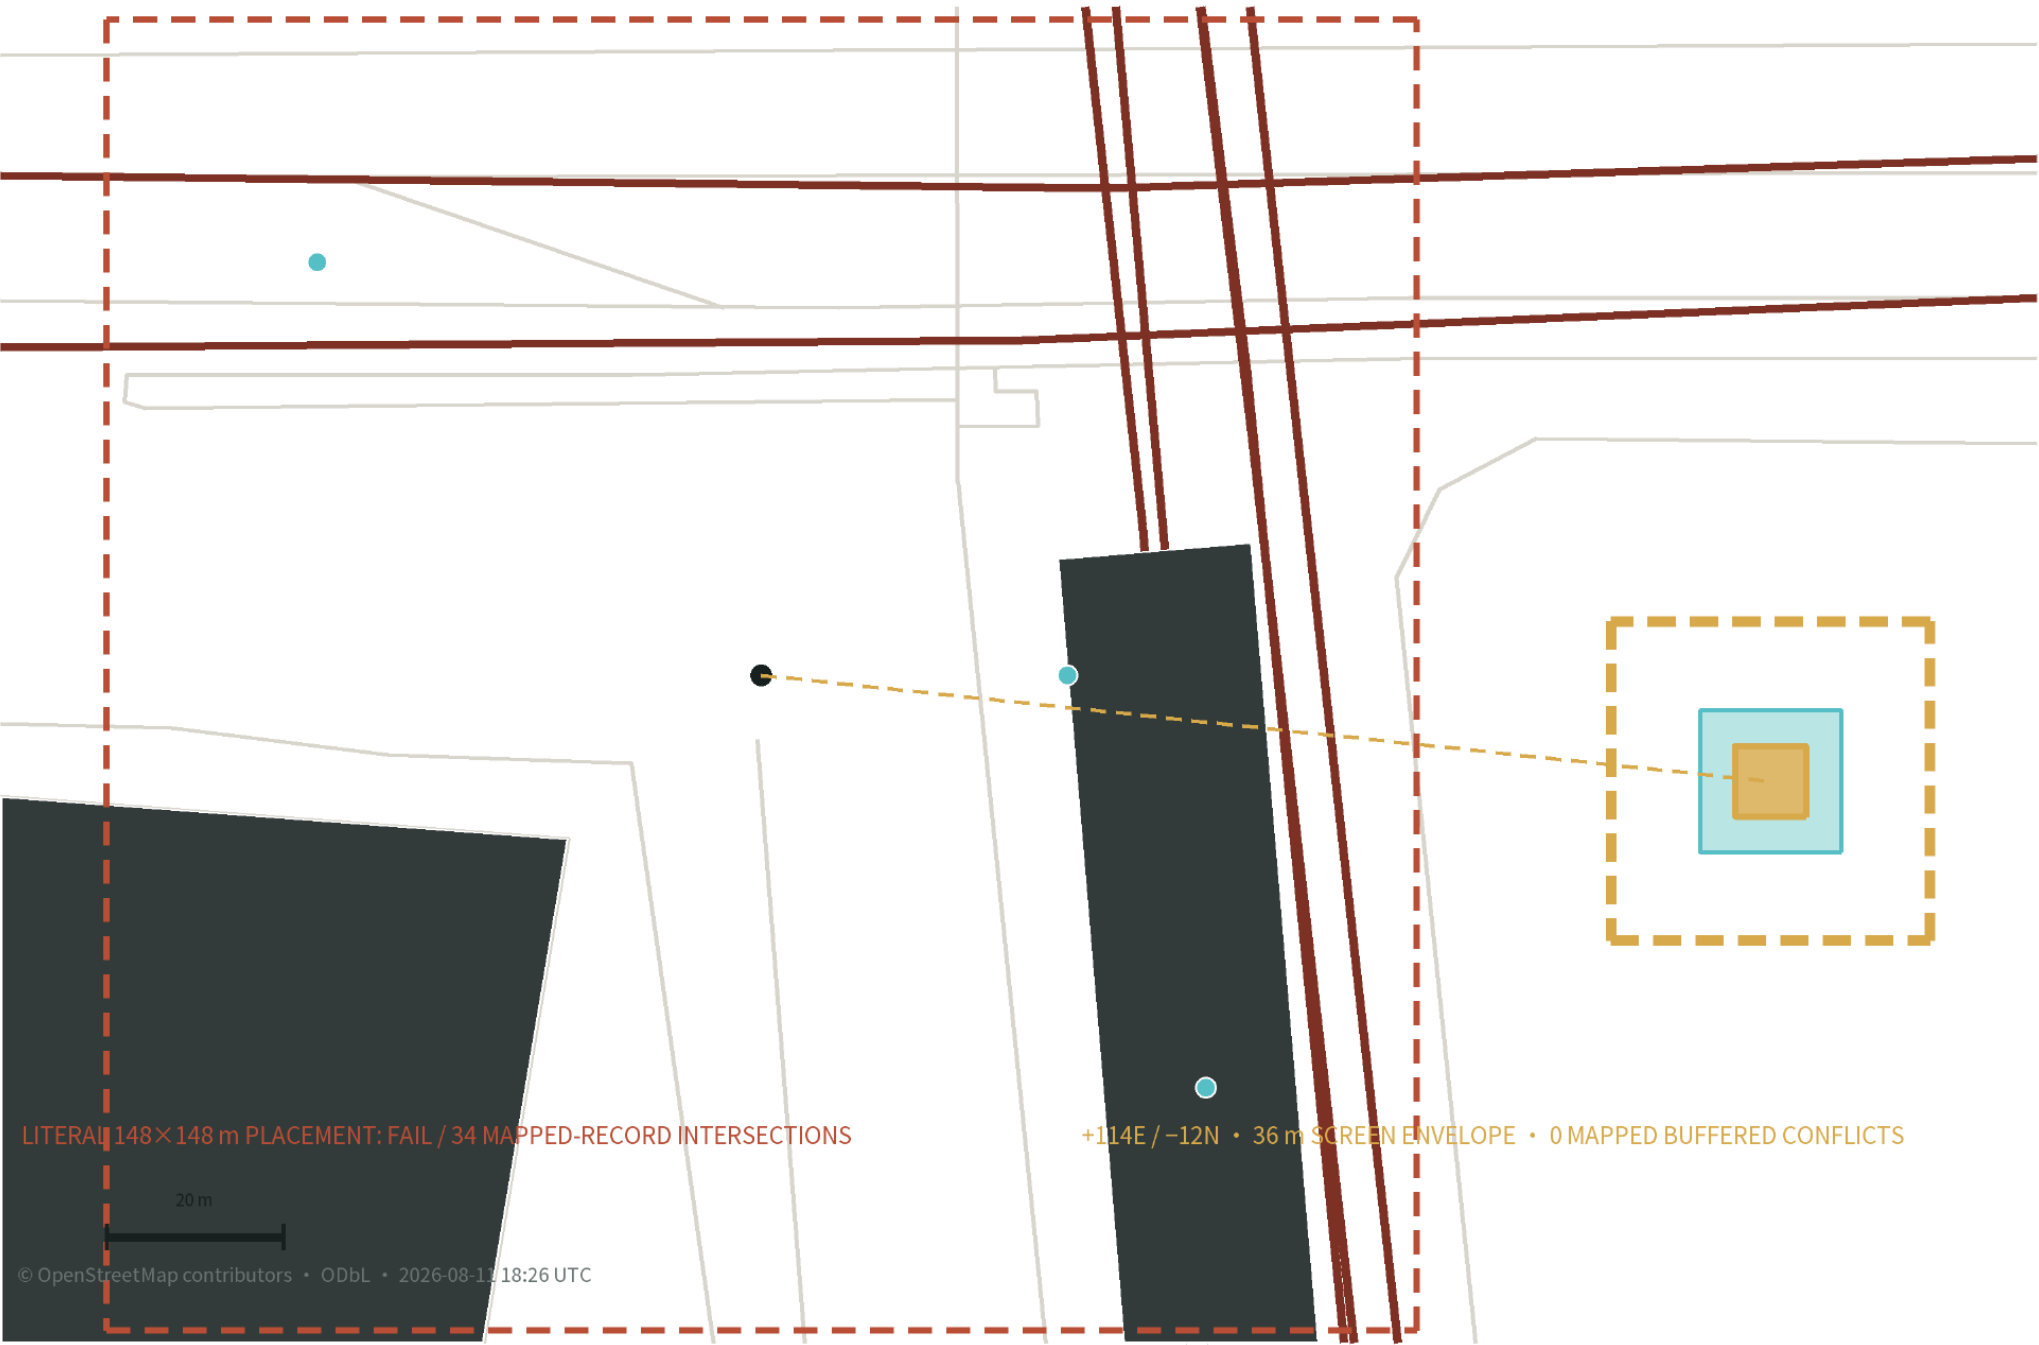


A measured 1:500 A0 view shows both the rejected station-centred 148-m frame and the offset orientation-screen envelope.

OSM is morphology evidence—not a parcel, survey or metro-protection record.


P0 PLAN / 1:100 AT FULL-SIZE A0

ONE 8 m SUPPORT BAY WITHIN 16 m REVERSIBLE GROUND

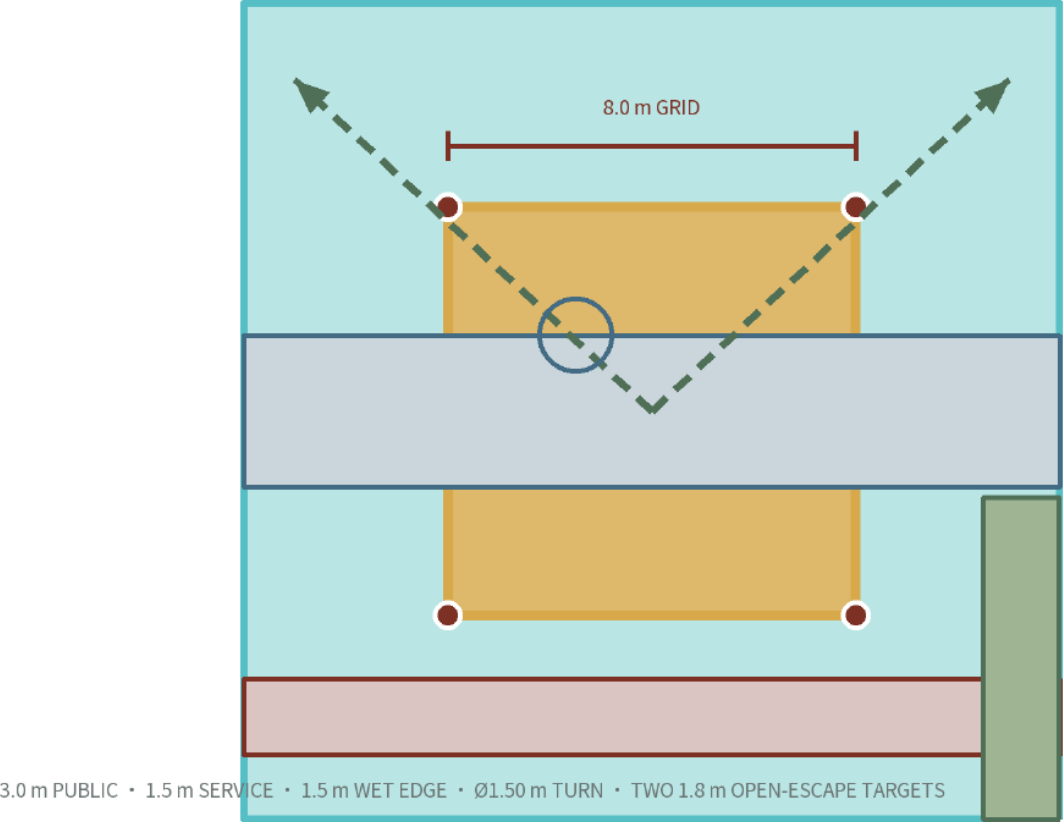

INHABITED SECTION / 1:200 AT FULL-SIZE A0

OPEN CANOPY: NO COOKING / TRACTION-BATTERY CHARGING; FIRE + OCCUPANT LOAD TBC

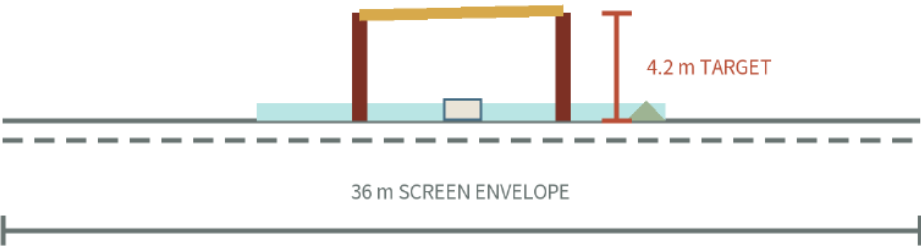


The proposed 8-by-8-m bay, 16-by-16-m reversible ground, 1:100 plan and 1:200 section share one model.

Every life-safety dimension remains subject to local review.

EAVE-WATER-SERVICE INTERFACE / 1:20 AT FULL-SIZE A0

CLEAR GEOMETRY TO SCALE; MEMBER + PRODUCT THICKNESSES TBC STRUCTURE/FIRE/MEP

DEMOUNTABLE ROOF CASSETTE / 2% FALL HYPOTHESIS

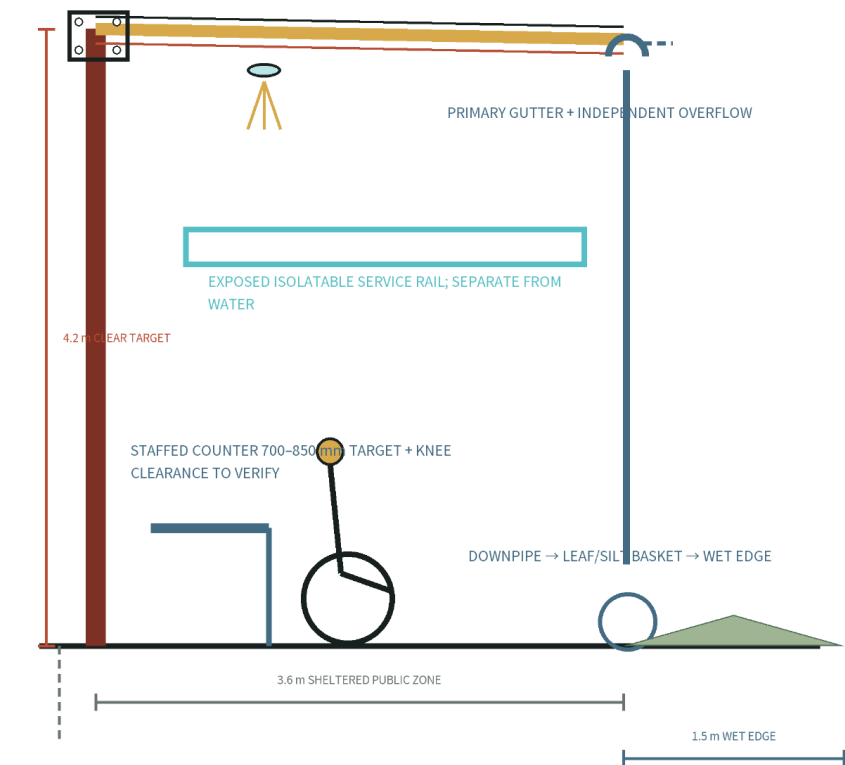

64 m² ROOF × 10 mm RAIN = 0.64 m³; OUTLET/STORAGE/INFILTRATION TBC TOPO, SOIL + MUNICIPAL DRAINAGE.

PERFORMANCE SCHEDULE / PARTICIPANT REFERENCE SPEC

01	BOLTED GALVANISED FRAME • SECTION/GRADE/FIRE TBC	¥1.9–3.8M	
02	DEMOUNTABLE METAL CASSETTE • WIND/SNOW/CONDENSATION TBC	PARTICIPANT ROM / NOT A TENDER PRICE	
03	DRY-LAID REPLACEABLE PAVING • SLIP/FROST/PERMEABILITY TBC	06:00–24:00 • 5-FTE ROSTER	
04	VISIBLE DRAINAGE + WINTER DRAIN-DOWN; DISCHARGE OUTSIDE CLEAR ROUTE	OPEX ASSUMPTION ¥1.2–2.2M/Y	
05	SURFACE ISOLATABLE SERVICE RAIL • LOAD/METERING/FIRE TBC	06:30 RIDER/CLEANER WATER + REST	
		12:30 FOOD HANDOFF; NO COOKING	
		19:00 REPAIR/LEARNING/STAFFED HELP	


NO TITLE/REDLINE, NAMED OPERATOR, 12-MONTH OPEX RESERVE, ACCESS AGREEMENT, METRO/UTILITY, FIRE/STRUCTURE/MEP REVIEW + PERMIT: NO BUILD, NO OPEN.

The 1:20 A0 clear-geometry interface coordinates drainage, inspectable services and wet edge; member and product thicknesses remain TBC.

Cost and operations remain participant assumptions until a named operator and approvals exist.

THREE KEY AREAS • ONE DELIVERY CHAIN


ZHONGZHIYUAN • PROOF YARD

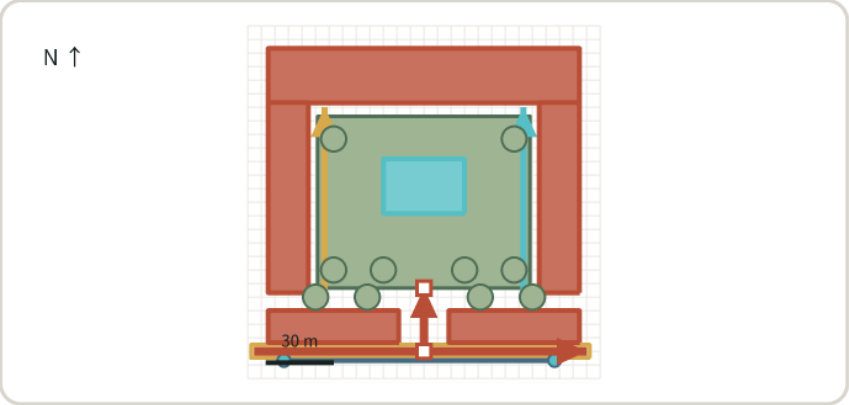

- RETAIN / REPAIR / INSERT retain usable frame • repair public threshold • insert reversible first bay
- FIRST PILOT observation cloister + isolated test cell
- OPERATOR test safety lead + independent checker
- STOP RULE stop on boundary breach, failed replay or unsafe continuation

CANDIDATE PLACEMENT • REBIND ON OFFICIAL POLYGONS/FABRIC/OWNERSHIP


AI ORIGIN • ORIGIN CLOISTER

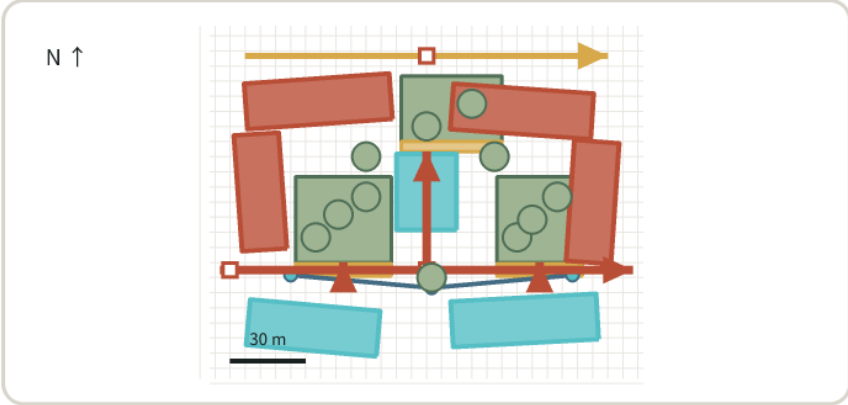

- RETAIN / REPAIR / INSERT retain campus/community stock • repair access • insert porous cloister
- FIRST PILOT negotiated gate + care court
- OPERATOR campus-community joint operator
- STOP RULE no build without access agreement and care operator

CANDIDATE PLACEMENT • REBIND ON OFFICIAL POLYGONS/FABRIC/OWNERSHIP

DAZHONGSI • EXCHANGE HALL

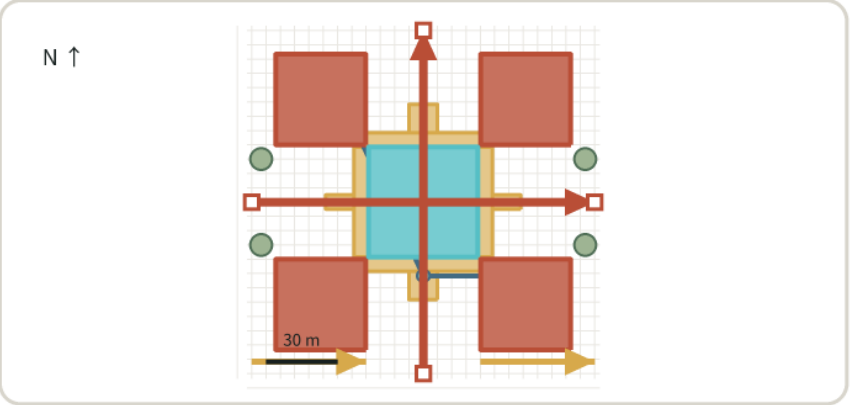

- RETAIN / REPAIR / INSERT survey retain/repair/insert • repair four-quadrant walking • add all-weather eave
- FIRST PILOT station porch + Rider Dock + staffed help desk
- OPERATOR local authority + transit + Shared Floor operator
- STOP RULE no scale-up before movement, ownership, fire and cost evidence

CANDIDATE PLACEMENT • REBIND ON OFFICIAL POLYGONS/FABRIC/OWNERSHIP

07

AGENT.2 / ECOSYSTEM

6 MECHANISMS → 8 RESOURCES → FIRST BAY → REPLAY → ADOPT/RETIRE

one-north • Punggol • 22@ • Paris-Saclay • Knowledge Quarter • Kendall; mechanisms, not forms.

AGENT.5 / CULTURE + COMMUNICATION

1905–1909 RAIL EVIDENCE → ZHONGGUANCUN → OPEN AI

Bay / court / lane / cloister / threshold are operating rules; Open Seasons publish source, status, operator and exit.

AGENT.6 / OPERATIONS

6 ACCOUNTABLE ROLES • 4 PHASES • A STOP GATE AT EVERY PHASE

operator + permit + public-benefit covenant + stop rule; if one is absent, the next phase does not start.

- 0–6m
- 6–18m
- 18–36m
- 3–8y

THREE INDEPENDENT DESIGN ROOTS

HARD GATES PASS; ARCHITECTURE IS NOT A PROXY SCORE


07

NOT THREE STYLES: PROVING LINE / SEASONAL COURTS / SHARED FLOOR USE DIFFERENT CAUSAL GENERATORS

C01

THE CIVIC PROVING LINE

A physical, reversible route from closed proof to ordinary public adoption

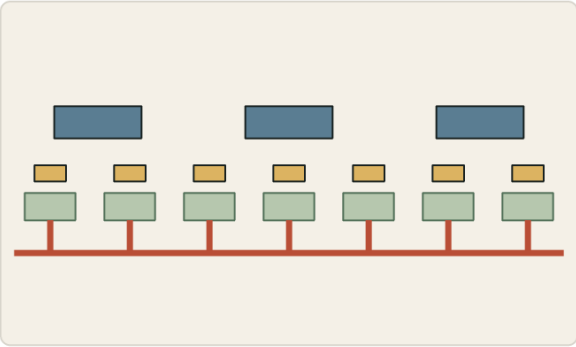


HARD GATES	PASS
GFA	77,200 m²
OPEN	88.8%
WINTER SUN	100.0%
SUMMER SHADE	0.0%

PASSED COMPARISON GATES

C02

THE FOUR-SEASON COURTYARDS

Generate the district from ten climate-and-care nodes before any AI tenant

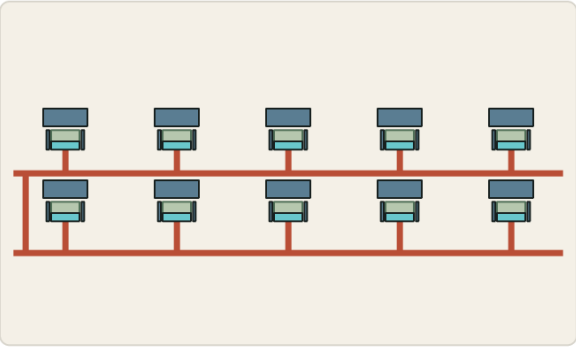


HARD GATES	PASS
GFA	77,760 m²
OPEN	91.5%
WINTER SUN	81.3%
SUMMER SHADE	46.6%

PASSED COMPARISON GATES

C03

THE SHARED FLOOR

Public ground and support remain while infill and AI change by life cycle

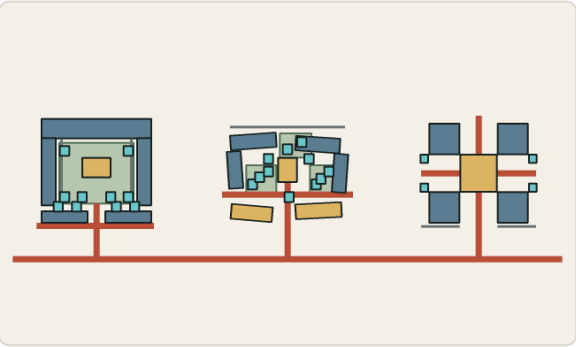

HARD GATES	PASS
GFA	82,468 m²
OPEN	86.2%
WINTER SUN	68.0%
SUMMER SHADE	36.6%

PASSED COMPARISON GATES

6/6 REBIND PASS

18/18 TARGETED FAULTS STOPPED

12/12 HANDOFF RECOVERY

ENCODED RECEIPTS ≠ FIELD CERTIFICATION

Proxy values do not pick a winner: receipts stop invalid states; spatial argument and design critique make the final selection.

THIS RUN: 3/3 HARD-GATE PASS • SHARED FLOOR 12/12 STATE TASKS PASS • HUMAN-EQUIVALENCE UNKNOWN

Three causally independent roots share one reference basis and pass root-specific hard gates.

Shared Floor advances as the preferred design basis pending jury and professional review; other roots remain traceable process evidence.

