01 / READ THE CITY

READ THE CITY: Where Are Problems Robust?

100 m grid + WorldPop + OSM + 5,000 weight samples

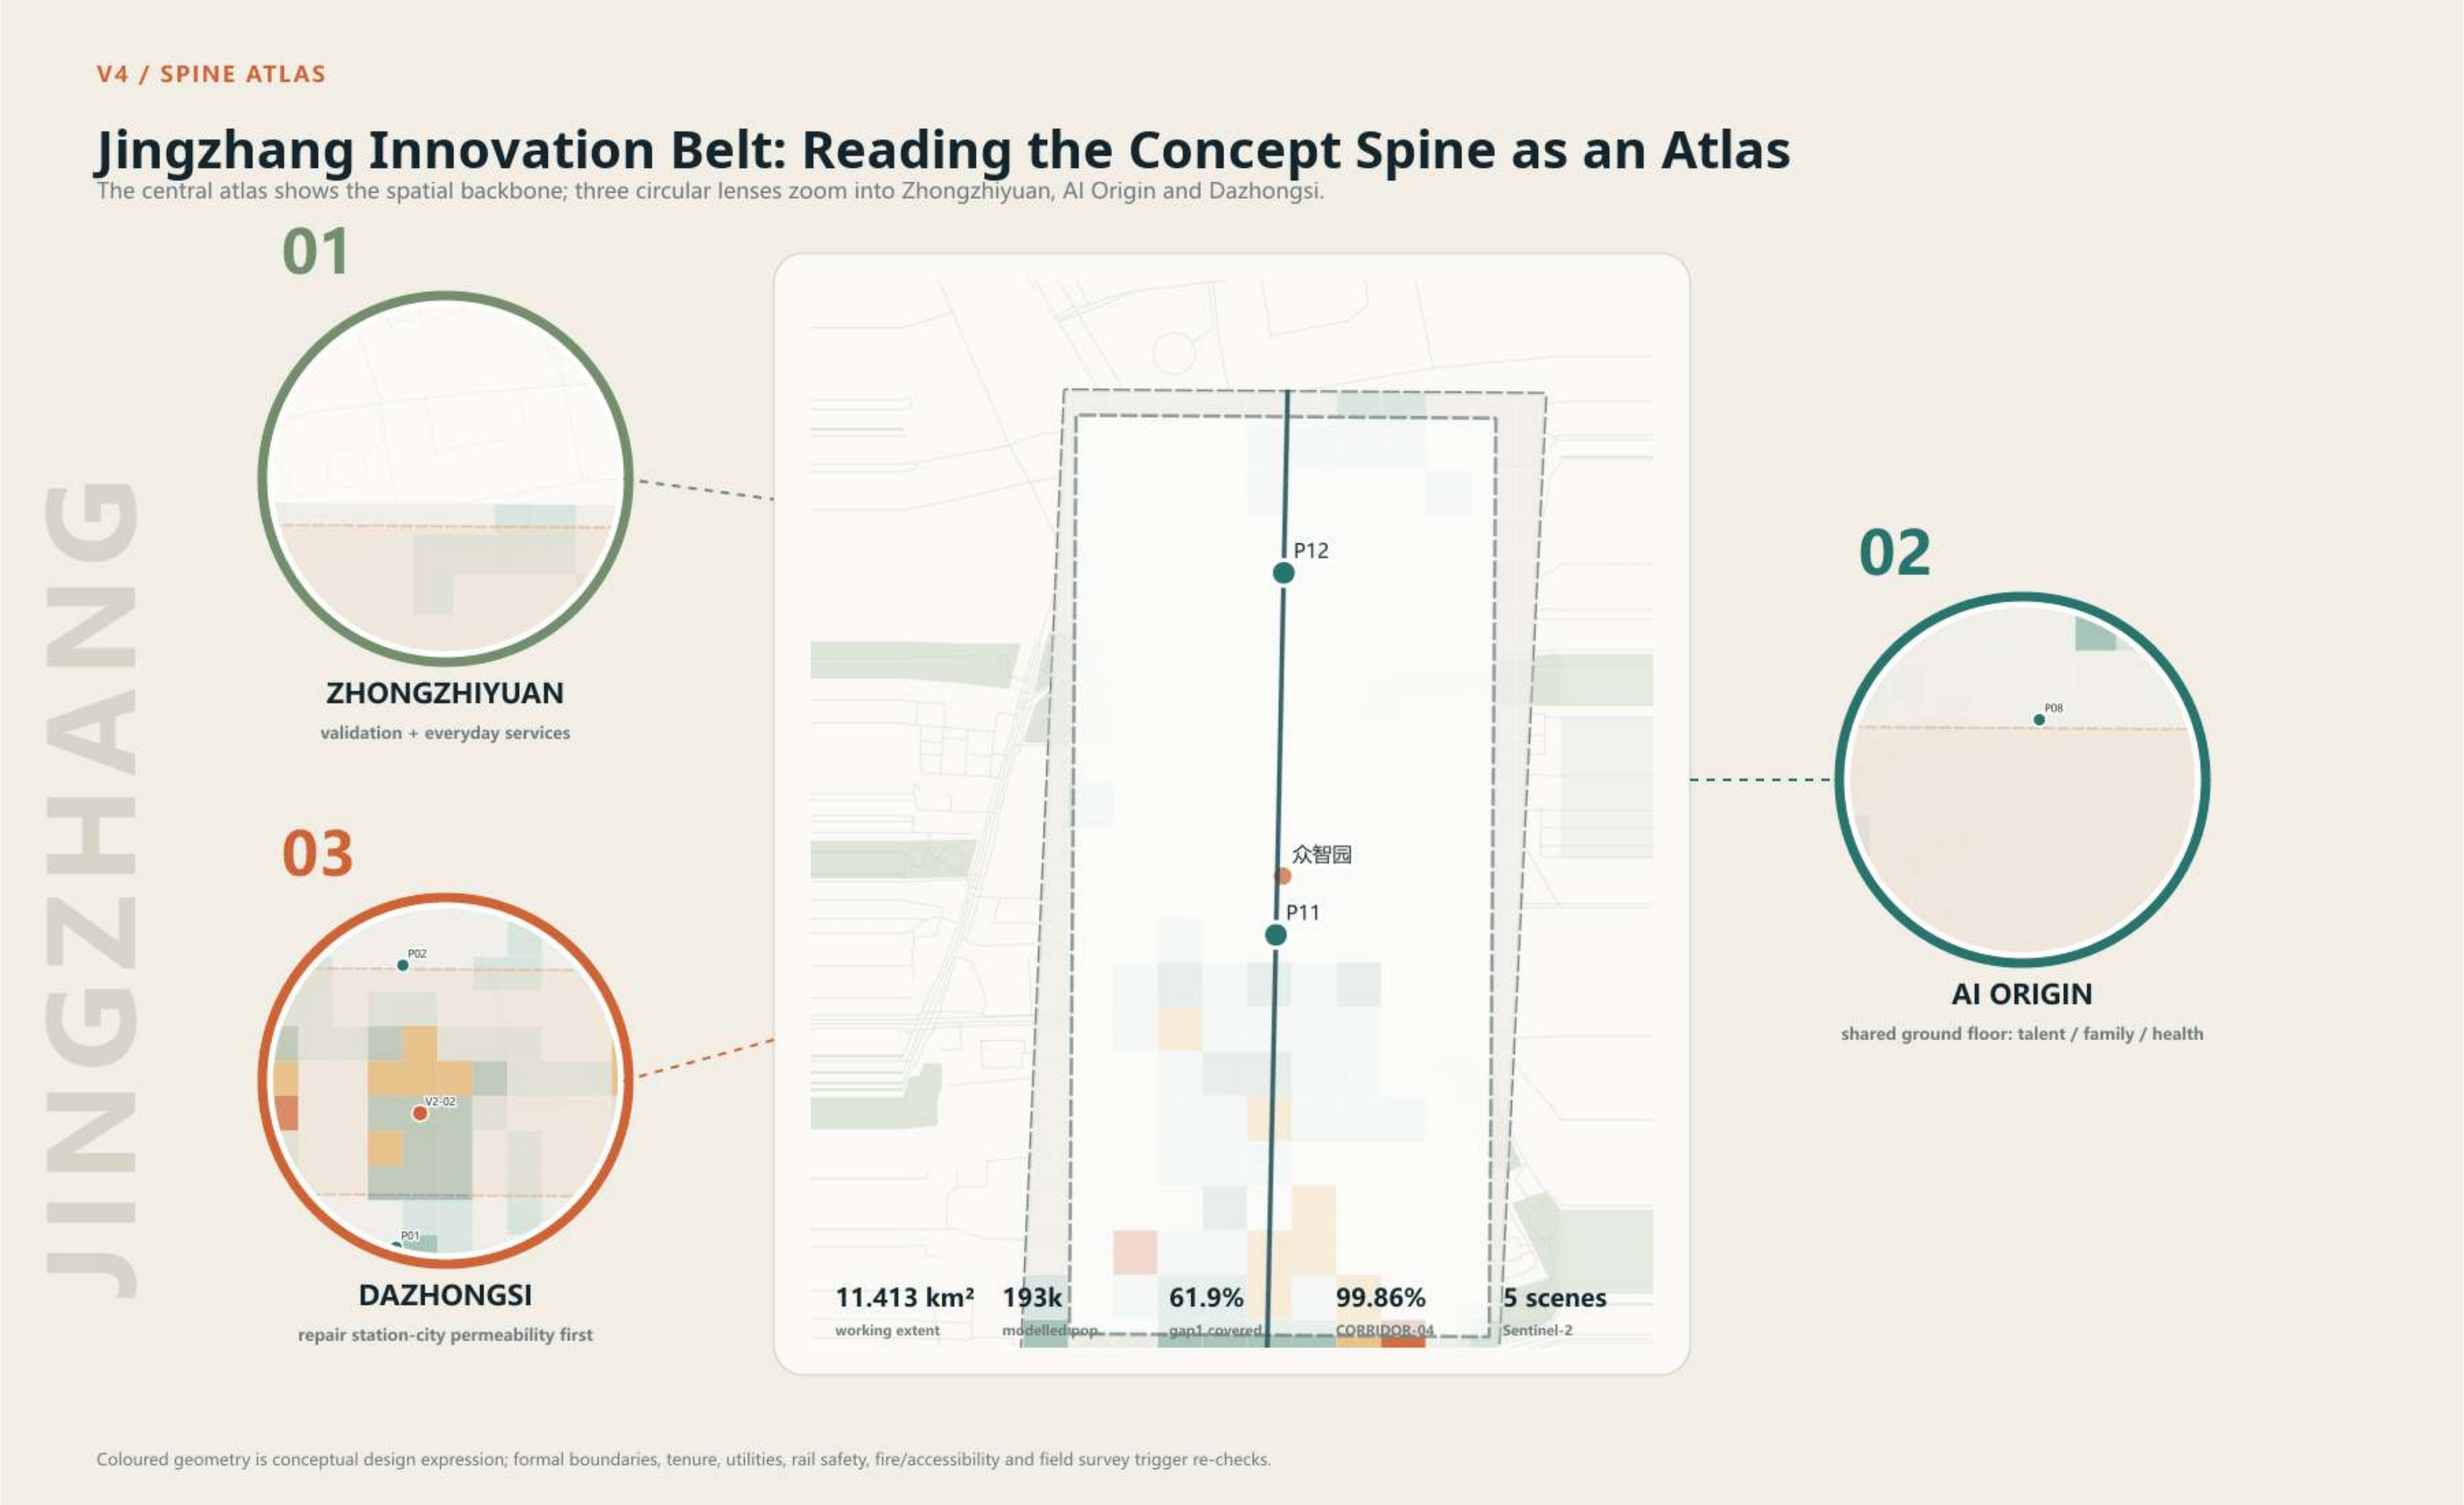

V4 / SPINE ATLAS

Jingzhang Innovation Belt: Reading the Concept Spine as an Atlas

The central atlas shows the spatial backbone; three circular lenses zoom into Zhongzhiyuan, AI Origin and Dazhongsi.

JINGZHANG
01
ZHONGZHIYUAN
validation + everyday services
03
P02
V2-02
P01
DAZHONGSI
repair station-city permeability first
P12
众智园
P11
02
P08
AI ORIGIN
shared ground floor: talent / family / health

11.413 km²	193k	61.9%	99.86%	5 scenes
working extent	modelled pop.	gap1 covered	CORRIDOR-04	Sentinel-2

Coloured geometry is conceptual design expression; formal boundaries, tenure, utilities, rail safety, fire/accessibility and field survey trigger re-checks.

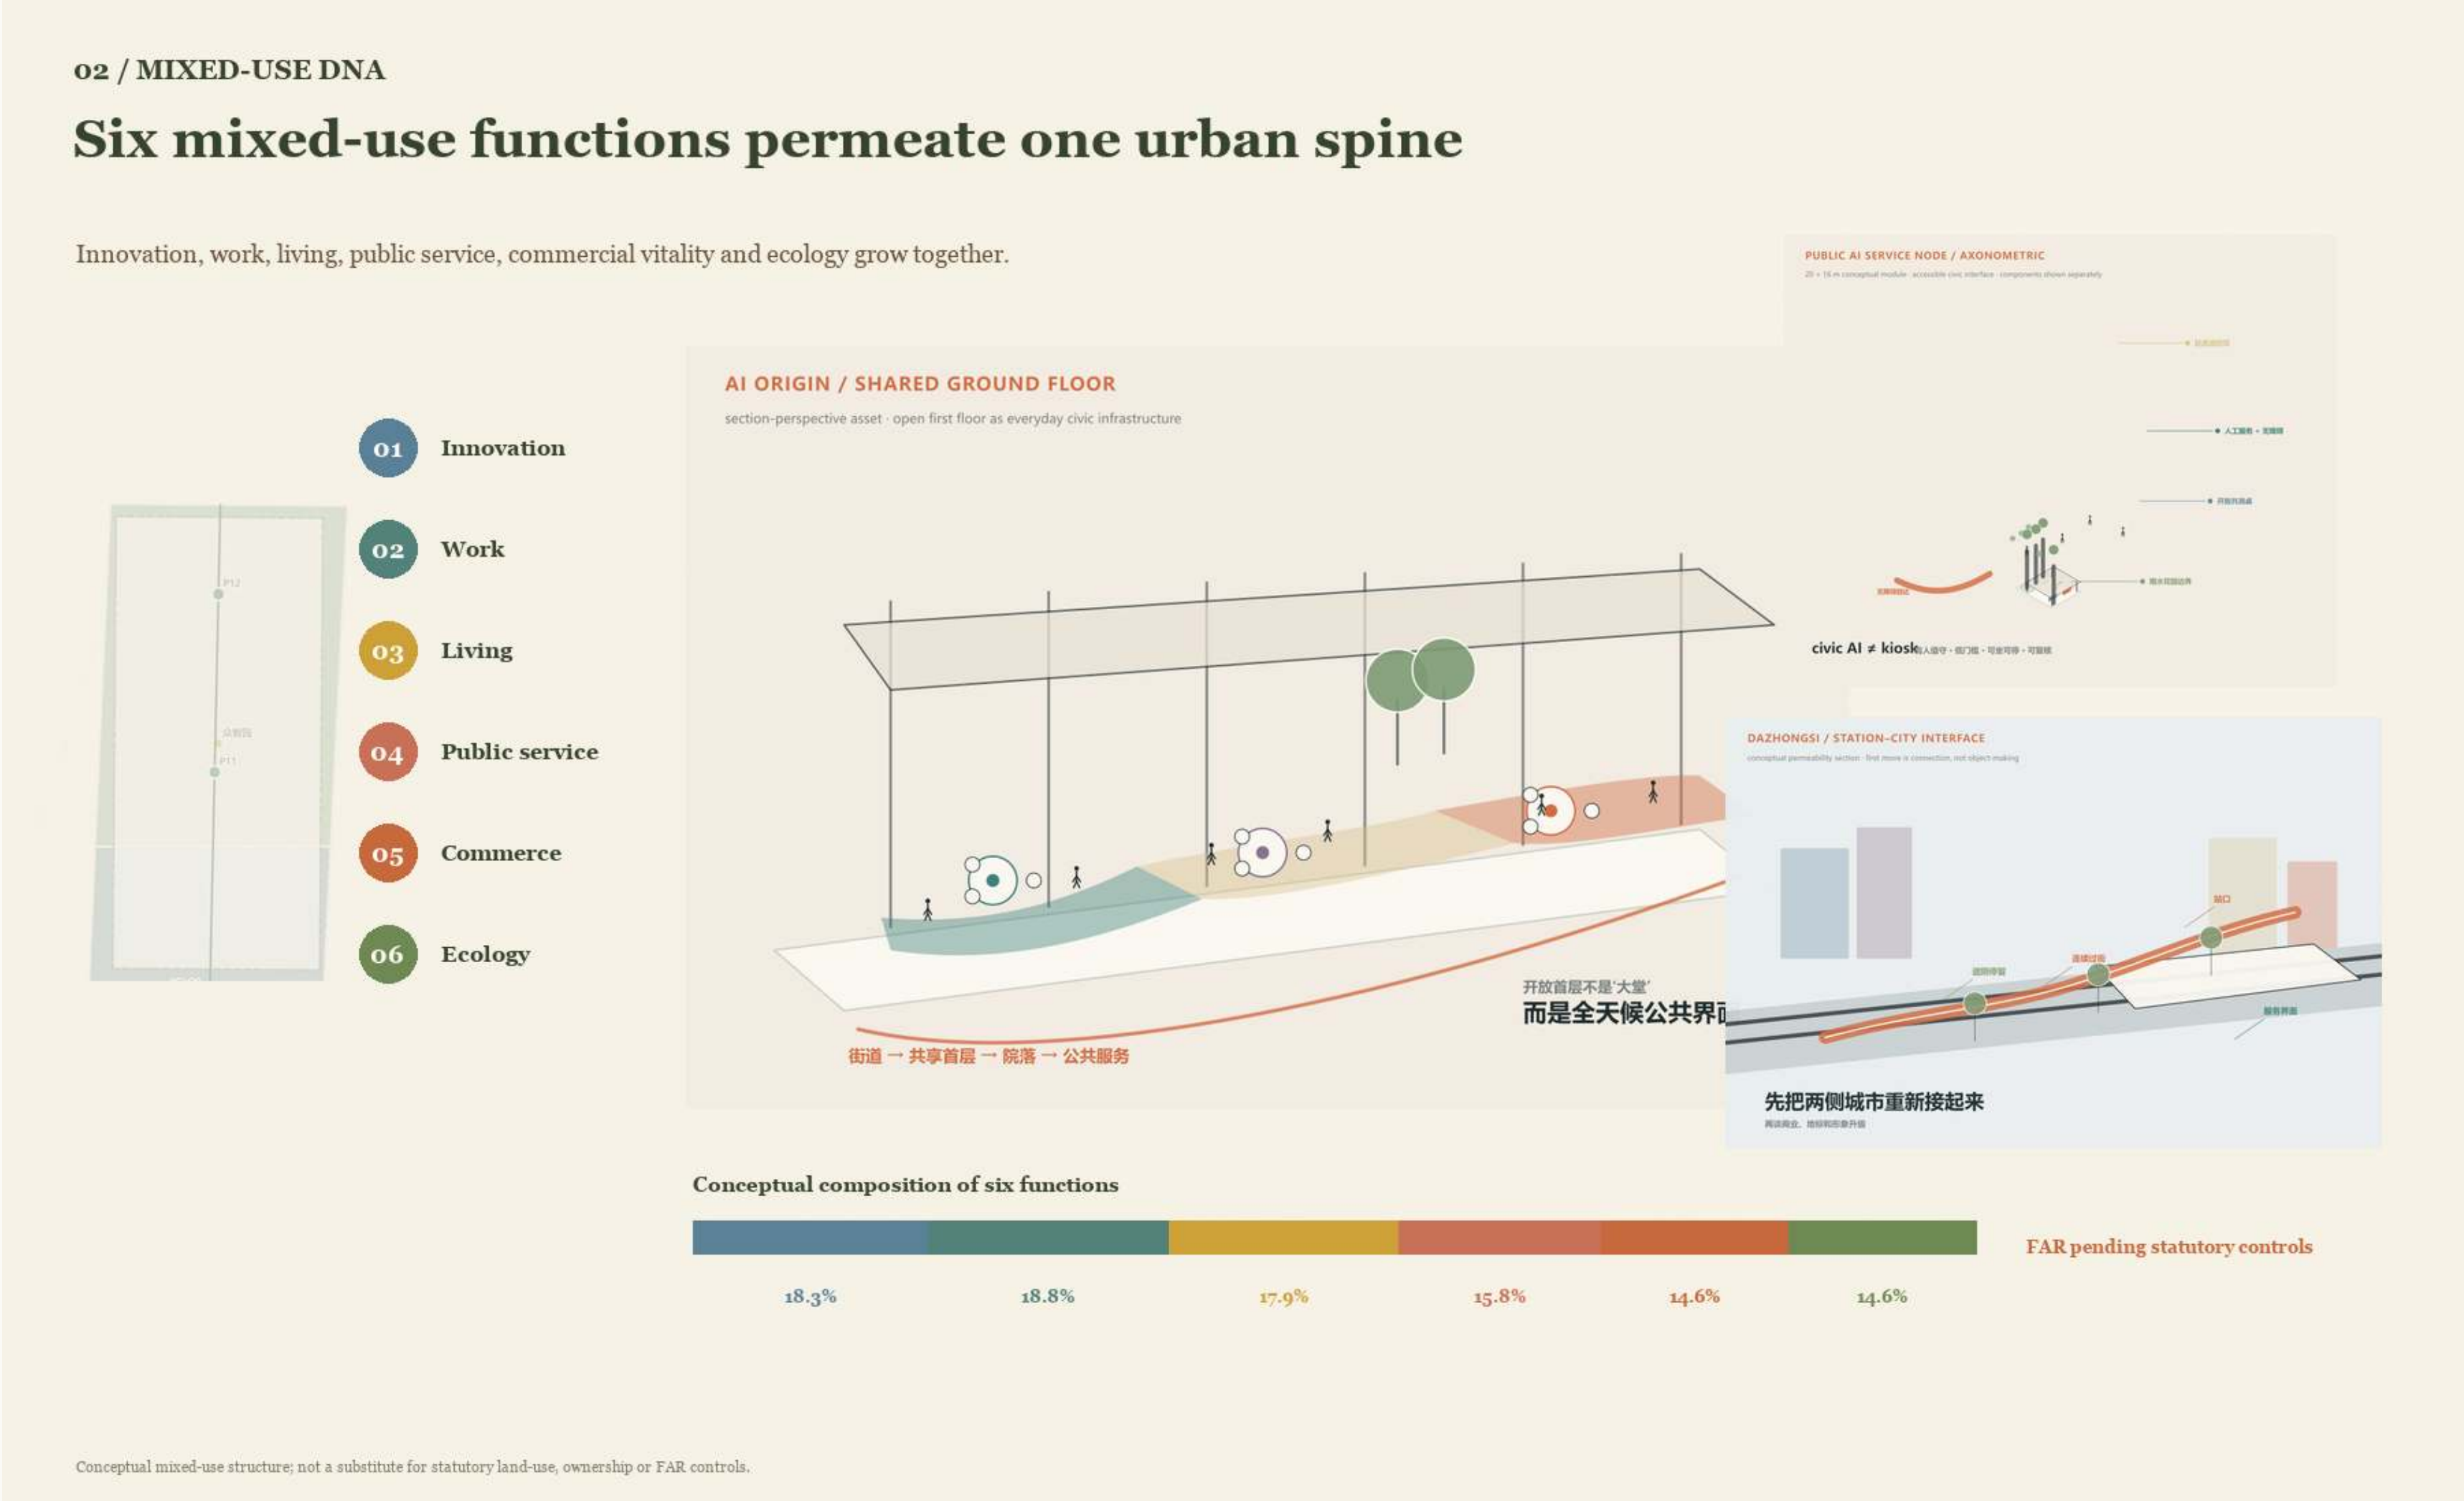

02 / MIXED-USE DNA

Six mixed-use functions permeate one urban spine

Innovation, work, living, public service, commercial vitality and ecology grow together.

- 01 Innovation
- 02 Work
- 03 Living
- 04 Public service
- 05 Commerce
- 06 Ecology

AI ORIGIN / SHARED GROUND FLOOR
section-perspective asset · open first floor as everyday civic infrastructure
开放首层不是'大堂'
而是全天候公共界面
街道 → 共享首层 → 院落 → 公共服务
PUBLIC AI SERVICE NODE / AXONOMETRIC
civic AI ≠ kiosk
DAZHONGSI / STATION-CITY INTERFACE
先把两侧城市重新接起来

Conceptual composition of six functions

18.3%	18.8%	17.9%	15.8%	14.6%	14.6%

FAR pending statutory controls

Conceptual mixed-use structure; not a substitute for statutory land-use, ownership or FAR controls.

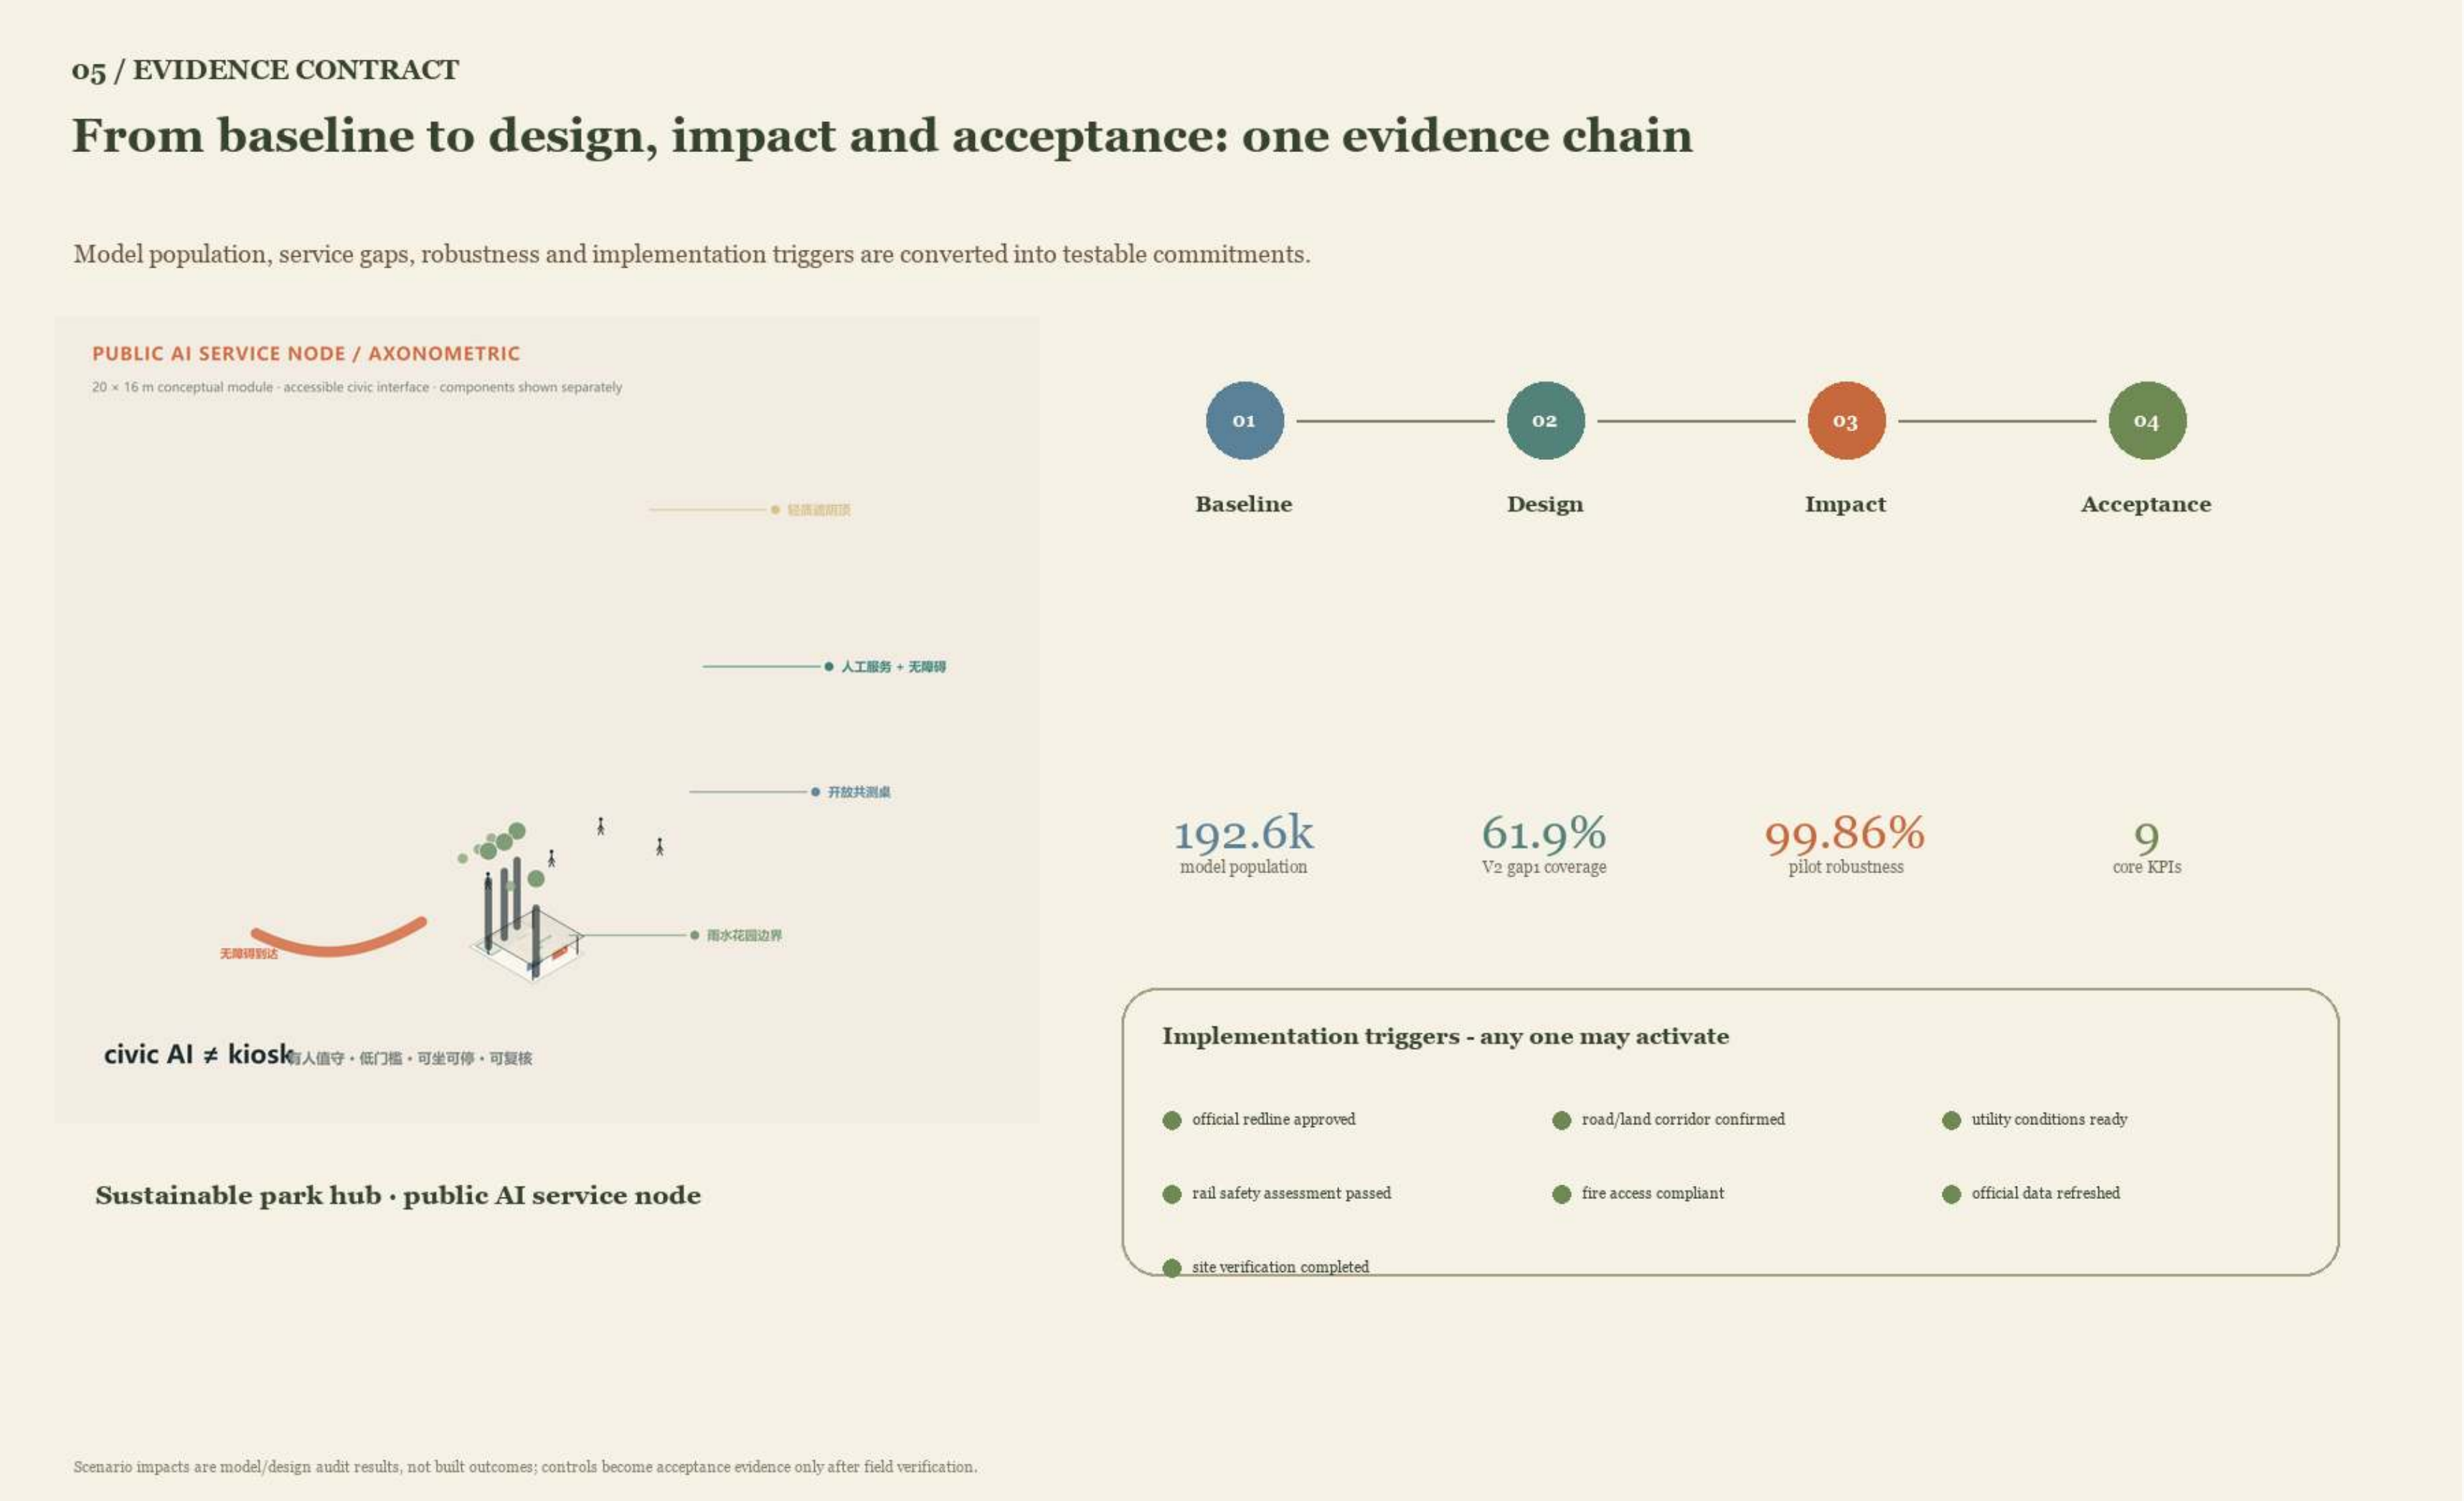

05 / EVIDENCE CONTRACT

From baseline to design, impact and acceptance: one evidence chain

Model population, service gaps, robustness and implementation triggers are converted into testable commitments.

PUBLIC AI SERVICE NODE / AXONOMETRIC
20 × 16 m conceptual module · accessible civic interface · components shown separately
轻质遮阳顶
人工服务 + 无障碍
开放共测桌
雨水花园边界
无障碍到达
civic AI ≠ kiosk
有人值守 · 低门槛 · 可坐可停 · 可复核

Sustainable park hub · public AI service node

01 Baseline → 02 Design → 03 Impact → 04 Acceptance

192.6k	61.9%	99.86%	9
model population	V2 gap1 coverage	pilot robustness	core KPIs

Implementation triggers - any one may activate

- official redline approved
- road/land corridor confirmed
- utility conditions ready
- rail safety assessment passed
- fire access compliant
- official data refreshed
- site verification completed

Scenario impacts are model/design audit results, not built outcomes; controls become acceptance evidence only after field verification.

Observed/model-estimated evidence is separated from concept design and unresolved data gaps

DESIGN THE BELT: Let Evidence Change Key Areas, Nodes and the Pilot

8 retained + 4 consensus replacements; CORRIDOR-04 lead; different first move in each key area

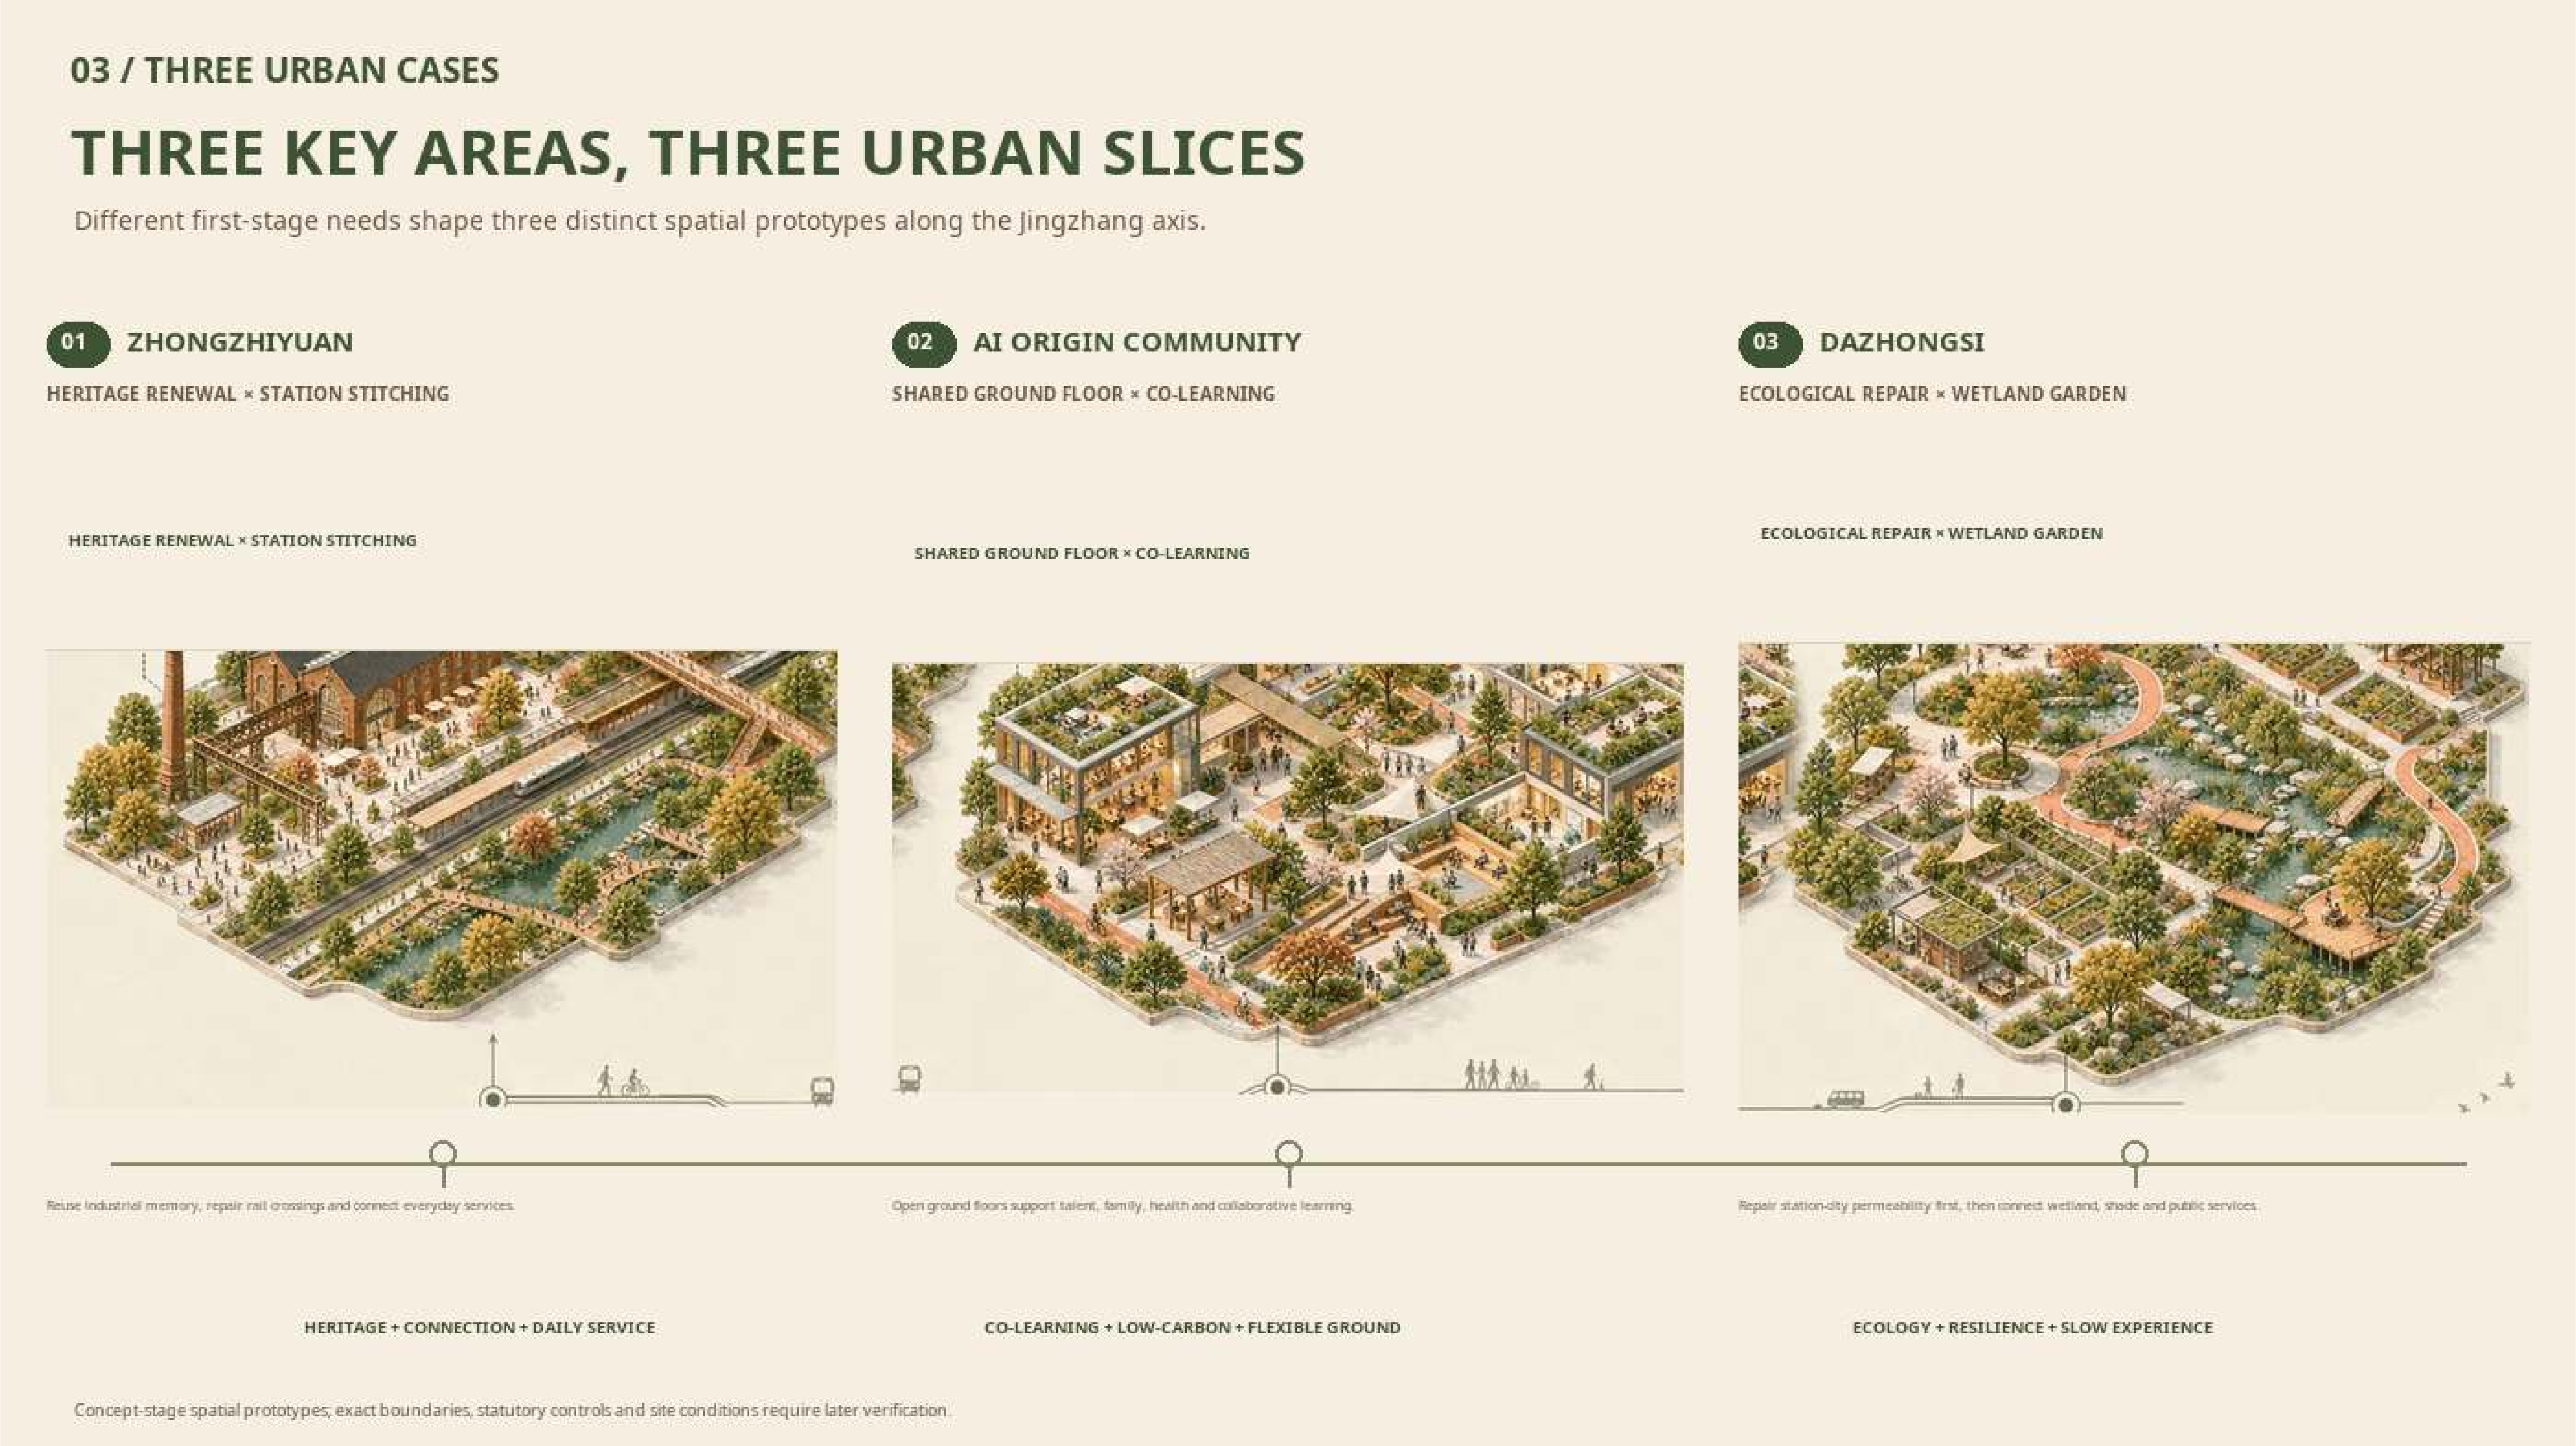

03 / THREE URBAN CASES

THREE KEY AREAS, THREE URBAN SLICES

Different first-stage needs shape three distinct spatial prototypes along the Jingzhang axis.

01 ZHONGZHIYUAN
HERITAGE RENEWAL × STATION STITCHING

02 AI ORIGIN COMMUNITY
SHARED GROUND FLOOR × CO-LEARNING

03 DAZHONGSI
ECOLOGICAL REPAIR × WETLAND GARDEN

HERITAGE RENEWAL × STATION STITCHING
SHARED GROUND FLOOR × CO-LEARNING
ECOLOGICAL REPAIR × WETLAND GARDEN

Reuse industrial memory, repair rail crossings and connect everyday services.

Open ground floors support talent, family, health and collaborative learning.

Repair station-city permeability first, then connect wetland, shade and public services.

HERITAGE + CONNECTION + DAILY SERVICE

CO-LEARNING + LOW-CARBON + FLEXIBLE GROUND

ECOLOGY + RESILIENCE + SLOW EXPERIENCE

Concept-stage spatial prototypes; exact boundaries, statutory controls and site conditions require later verification.

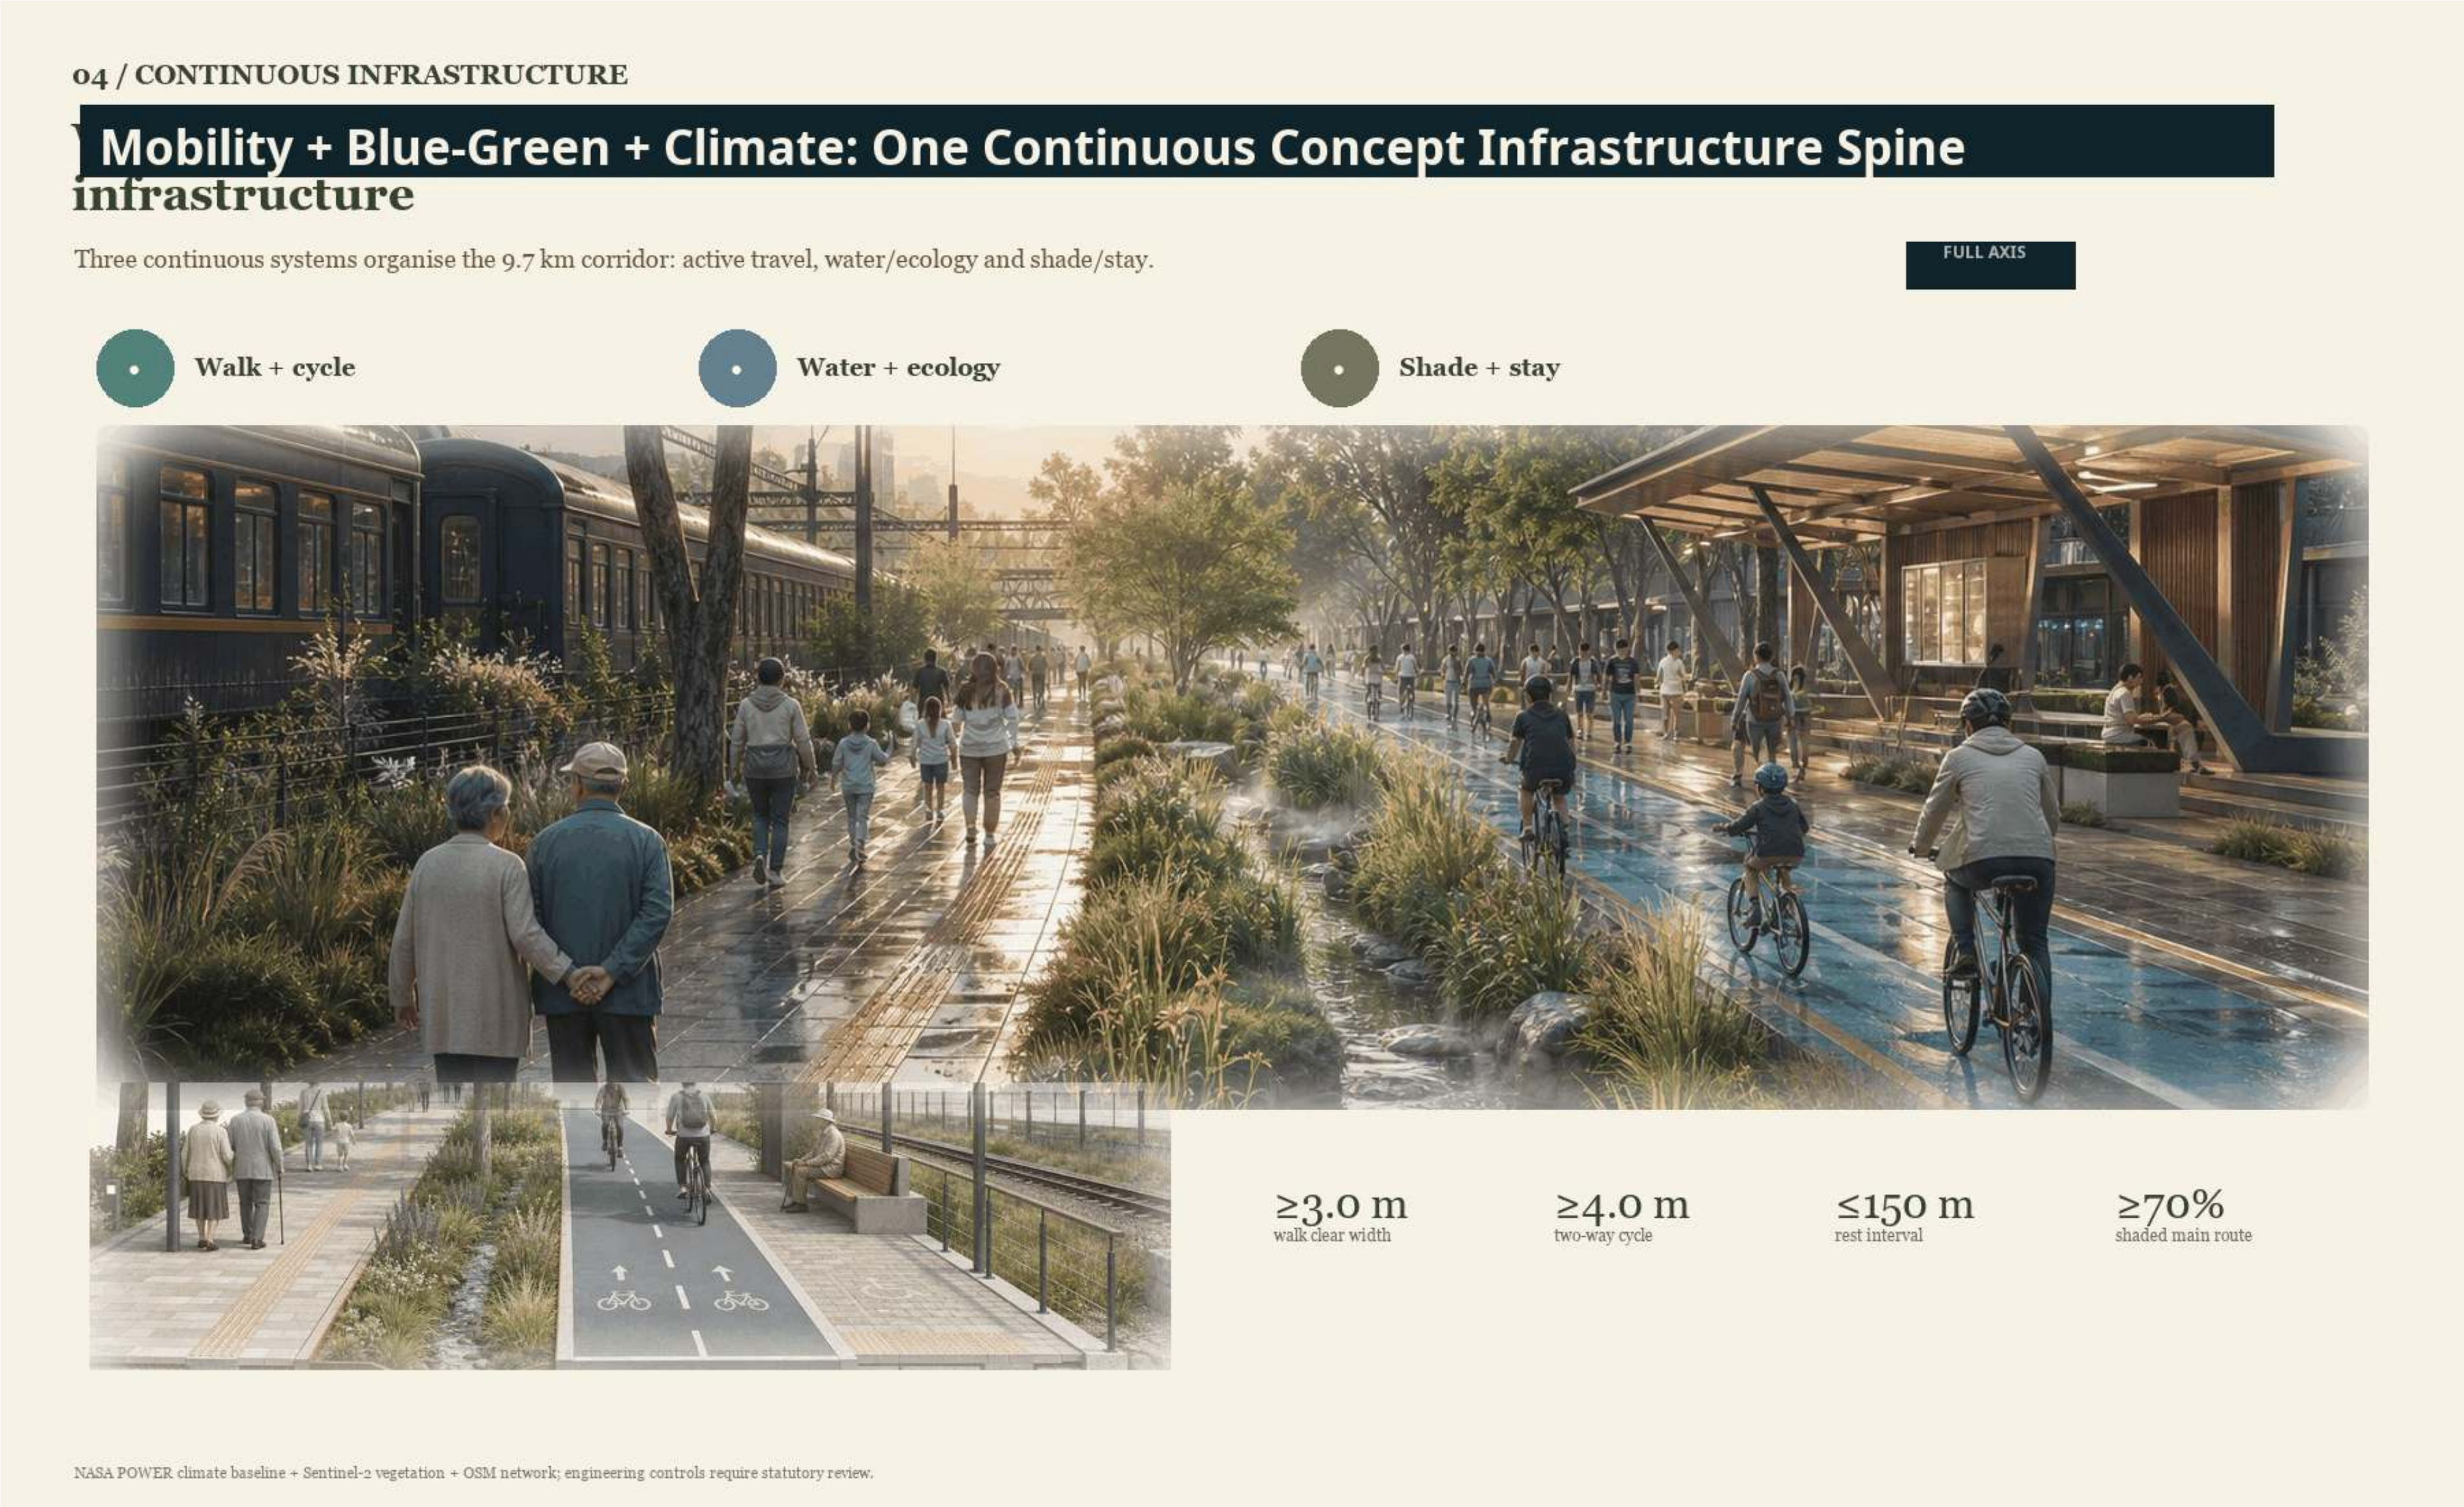

04 / CONTINUOUS INFRASTRUCTURE

Mobility + Blue-Green + Climate: One Continuous Concept Infrastructure Spine

infrastructure

Three continuous systems organise the 9.7 km corridor: active travel, water/ecology and shade/stay.

FULL AXIS

● Walk + cycle

● Water + ecology

● Shade + stay

≥3.0 m	≥4.0 m	≤150 m	≥70%
walk clear width	two-way cycle	rest interval	shaded main route

NASA POWER climate baseline + Sentinel-2 vegetation + OSM network; engineering controls require statutory review.

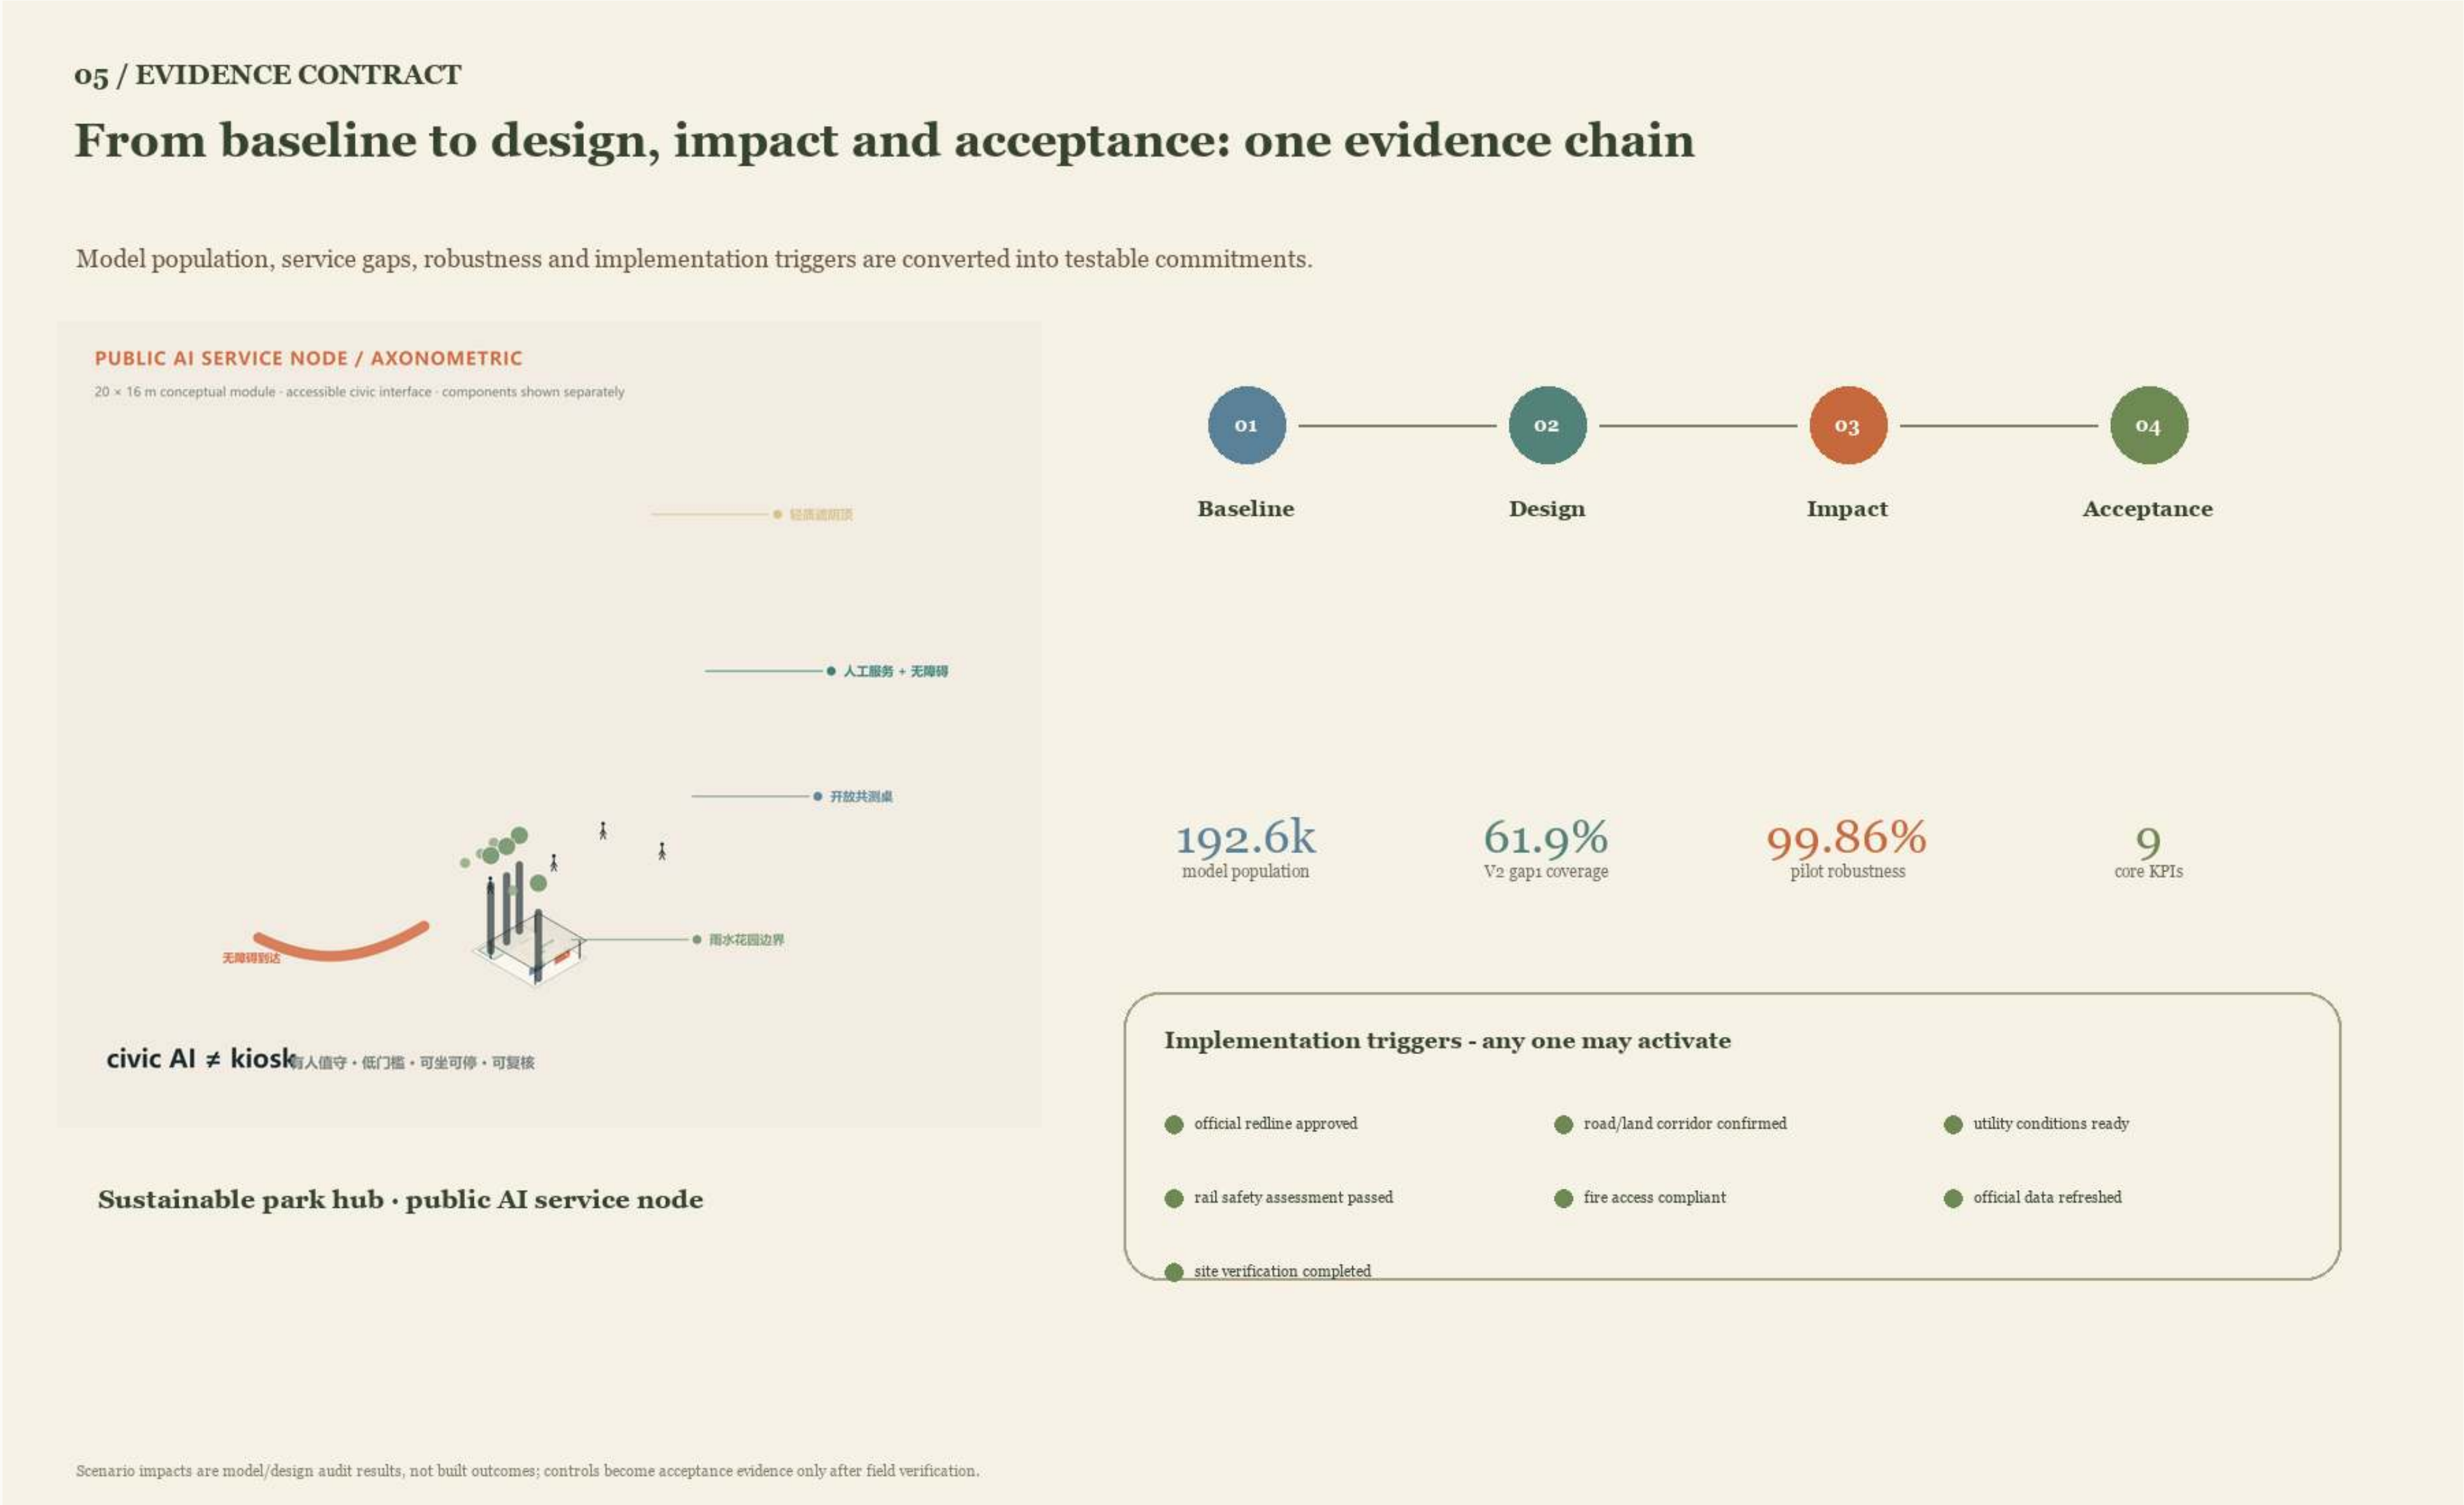

05 / EVIDENCE CONTRACT

From baseline to design, impact and acceptance: one evidence chain

Model population, service gaps, robustness and implementation triggers are converted into testable commitments.

PUBLIC AI SERVICE NODE / AXONOMETRIC

20 × 16 m conceptual module · accessible civic interface · components shown separately

civic AI ≠ kiosk 有人值守・低门槛・可坐可停・可复核

Sustainable park hub · public AI service node

01 Baseline — 02 Design — 03 Impact — 04 Acceptance

192.6k	61.9%	99.86%	9
model population	V2 gap1 coverage	pilot robustness	core KPIs

Implementation triggers - any one may activate

- official redline approved
- road/land corridor confirmed
- utility conditions ready
- rail safety assessment passed
- fire access compliant
- official data refreshed
- site verification completed

Scenario impacts are model/design audit results, not built outcomes; controls become acceptance evidence only after field verification.

All orange V2 geometry remains conceptual/provisional and subject to formal site checks

MAKE IT WORK: Turn Concept Design into Reviewable, Reversible Packages

320 m² node modules + 1 km pilot + 0-24 month delivery + AI governance loop

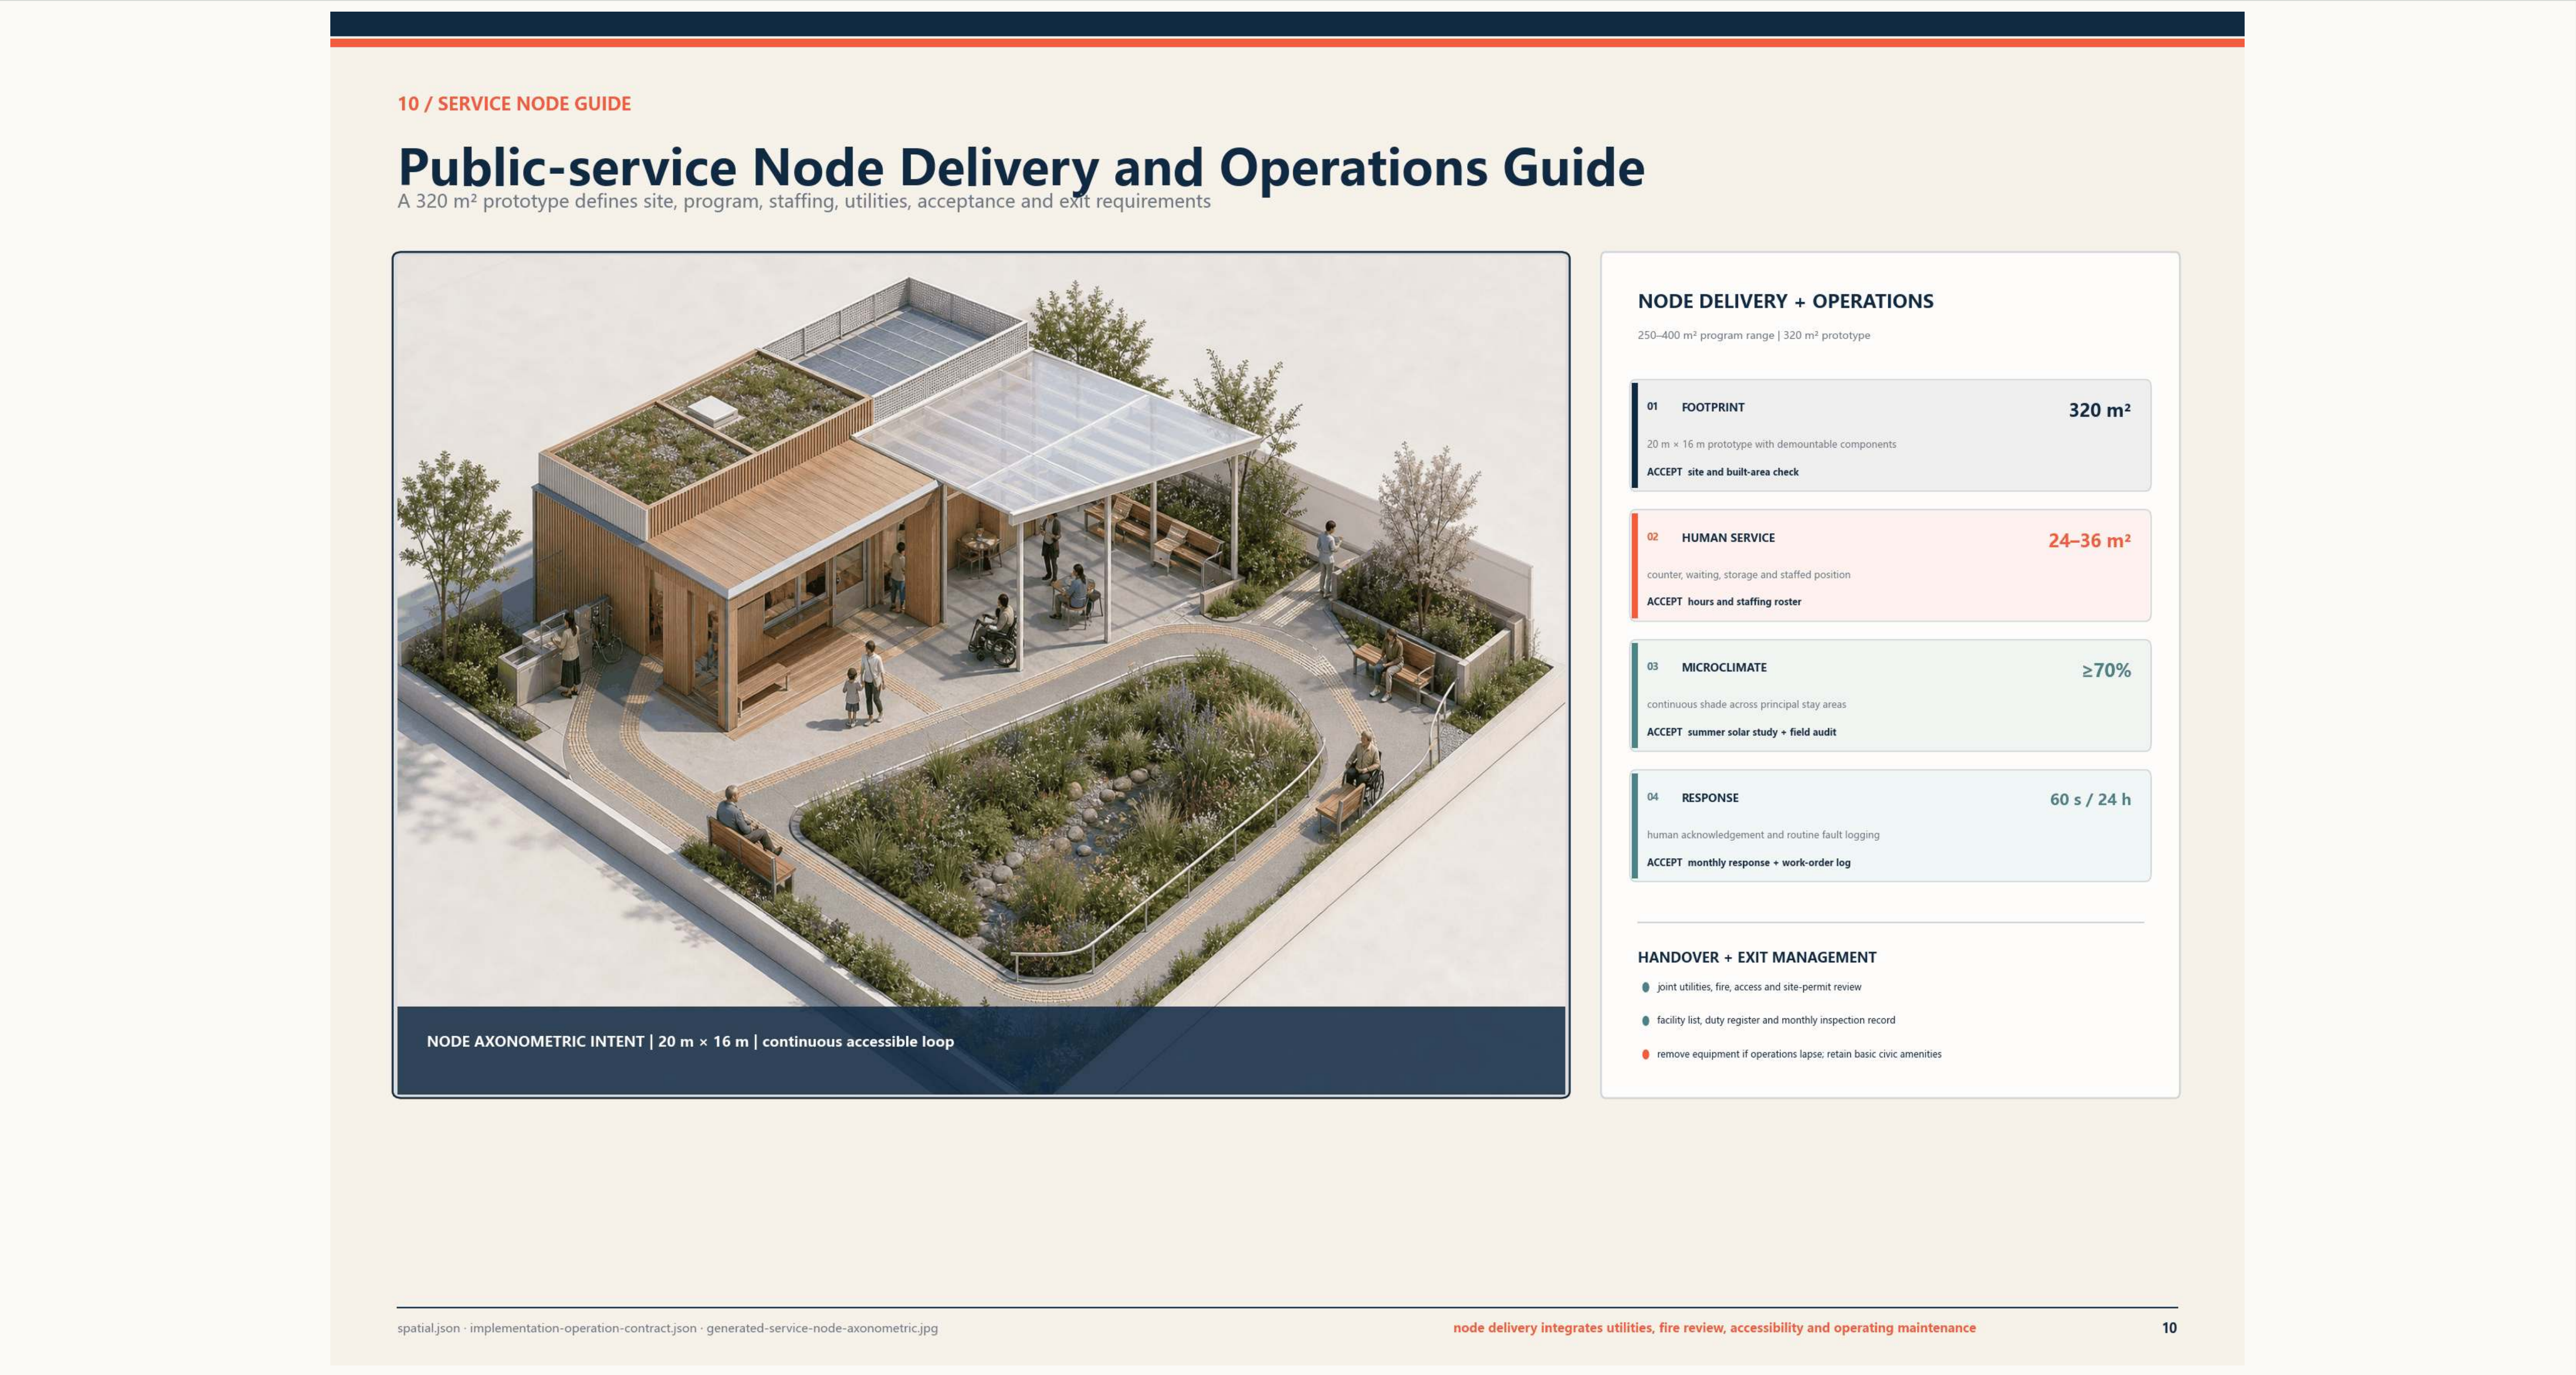

10 / SERVICE NODE GUIDE

Public-service Node Delivery and Operations Guide

A 320 m² prototype defines site, program, staffing, utilities, acceptance and exit requirements

NODE AXONOMETRIC INTENT | 20 m × 16 m | continuous accessible loop

NODE DELIVERY + OPERATIONS

250–400 m² program range | 320 m² prototype

No.	Item	Value	Description	Acceptance
01	FOOTPRINT	320 m²	20 m × 16 m prototype with demountable components	ACCEPT site and built-area check
02	HUMAN SERVICE	24–36 m²	counter, waiting, storage and staffed position	ACCEPT hours and staffing roster
03	MICROCLIMATE	≥70%	continuous shade across principal stay areas	ACCEPT summer solar study + field audit
04	RESPONSE	60 s / 24 h	human acknowledgement and routine fault logging	ACCEPT monthly response + work-order log

HANDOVER + EXIT MANAGEMENT

- joint utilities, fire, access and site-permit review
- facility list, duty register and monthly inspection record
- remove equipment if operations lapse; retain basic civic amenities

spatial.json · implementation-operation-contract.json · generated-service-node-axonometric.jpg

node delivery integrates utilities, fire review, accessibility and operating maintenance

10

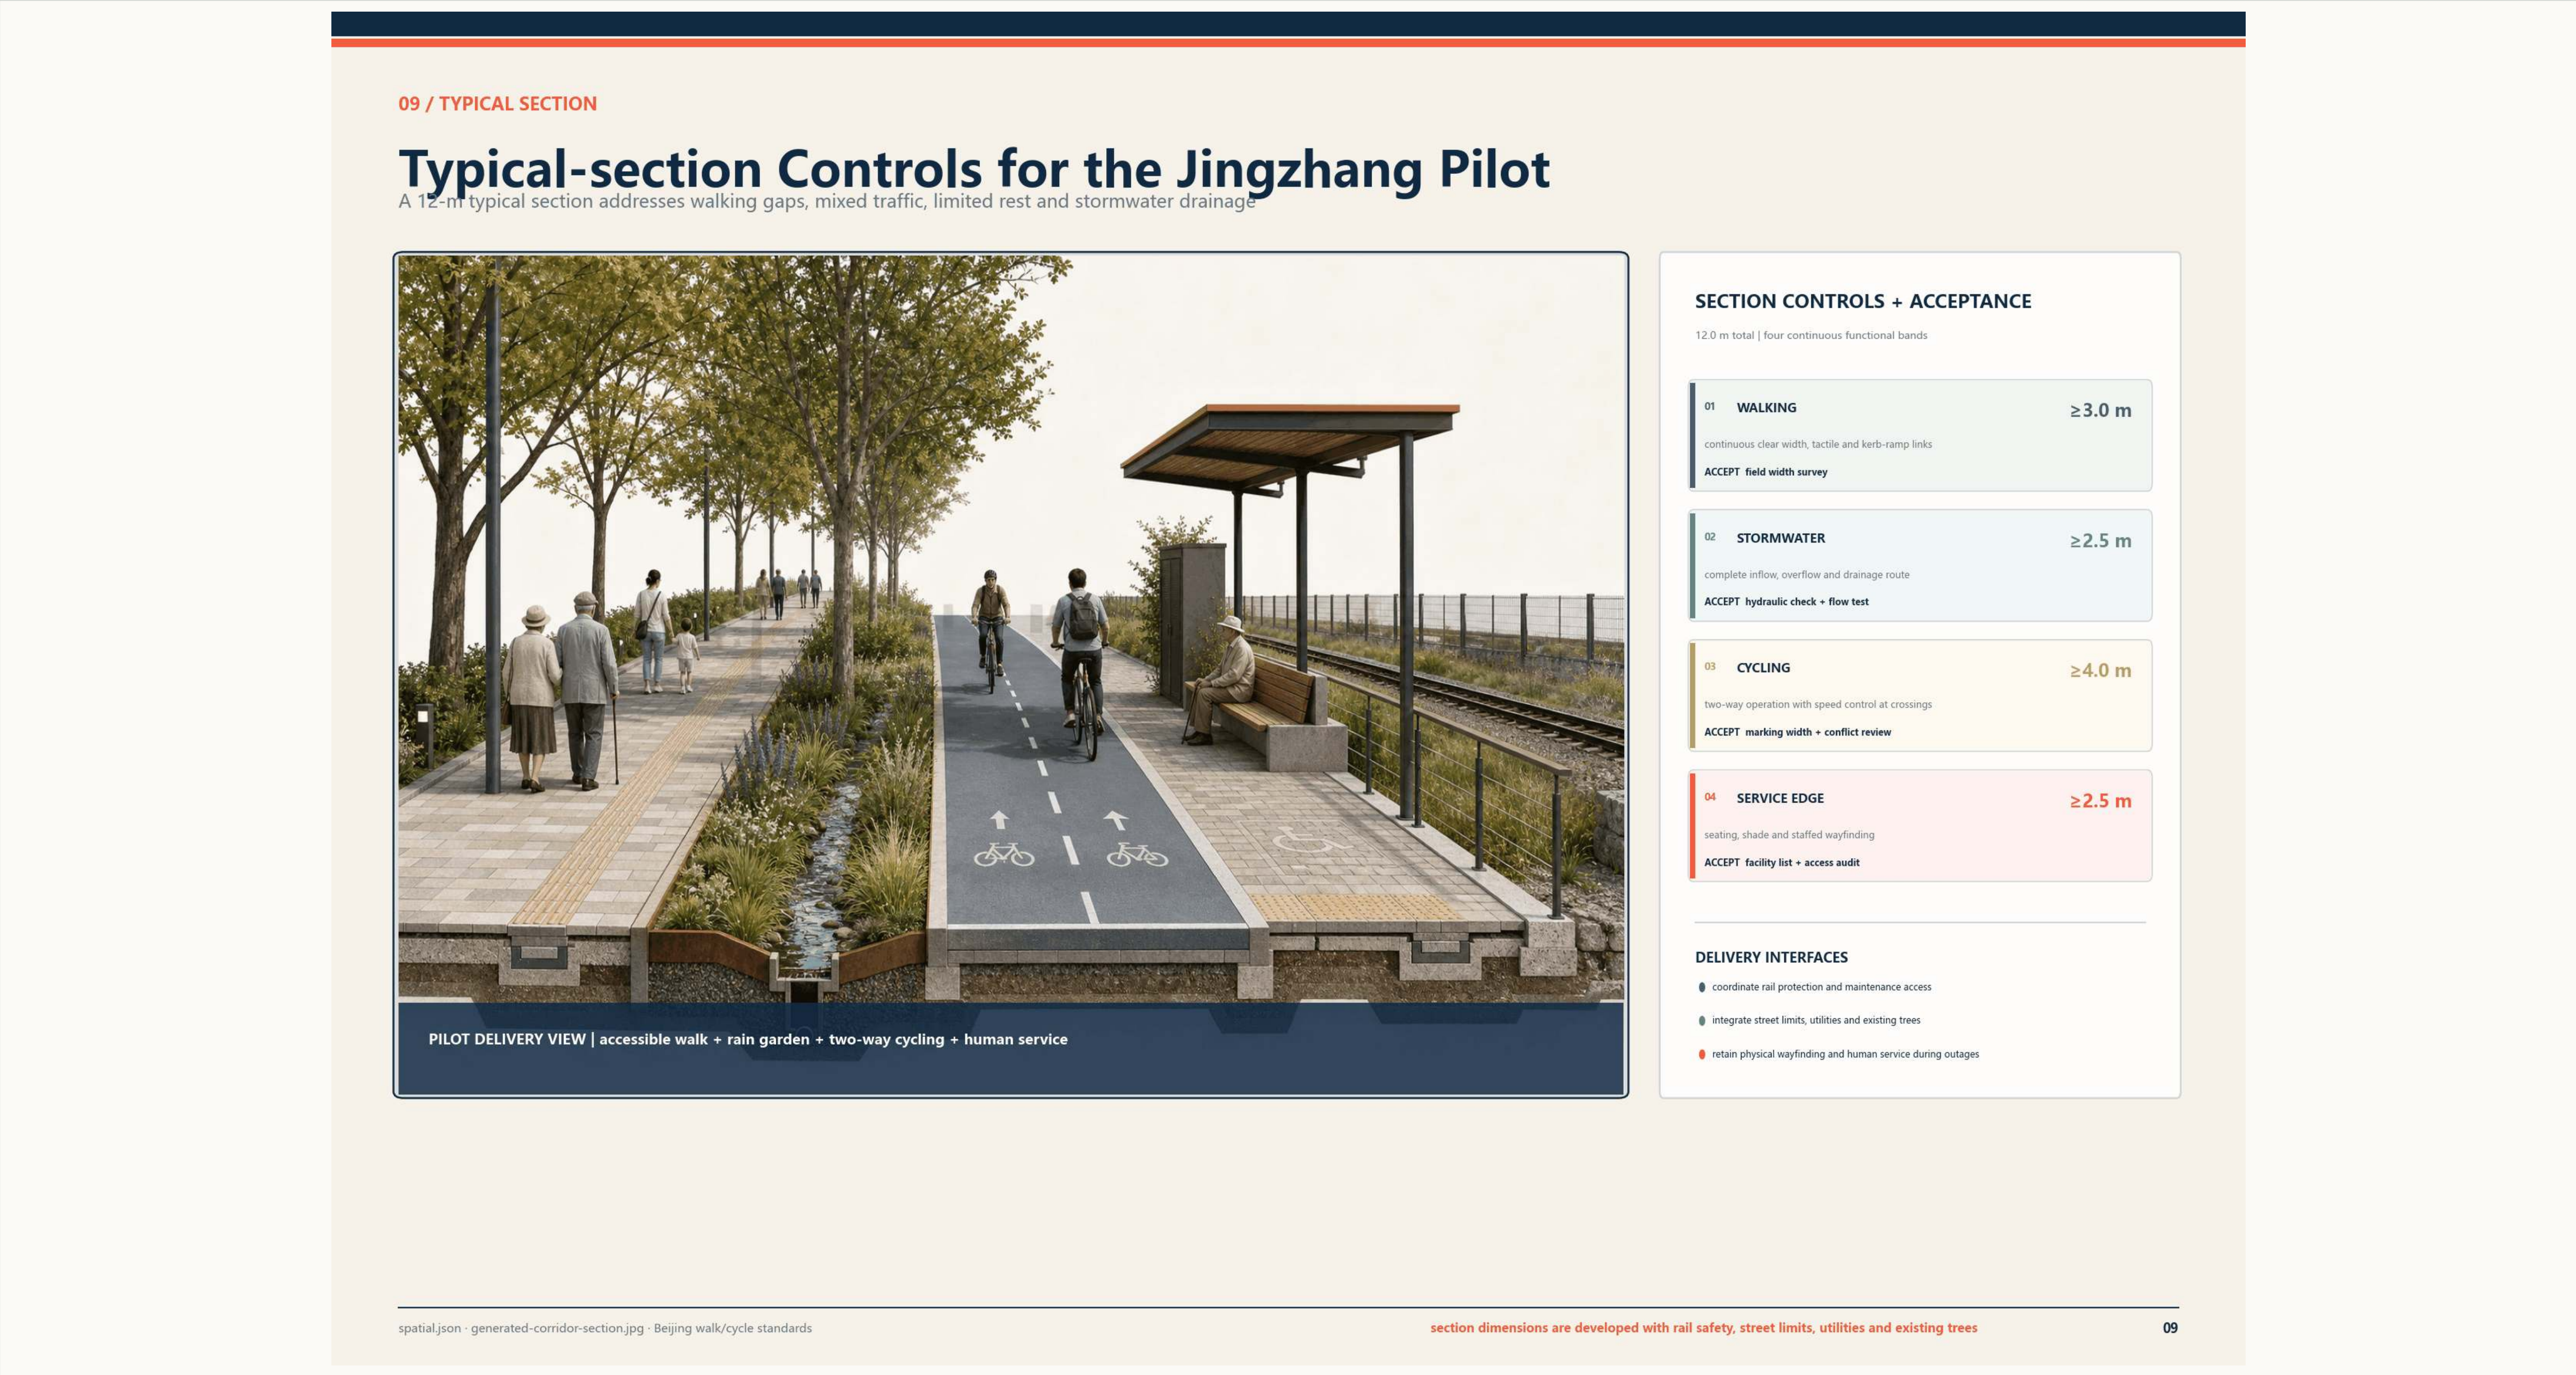

09 / TYPICAL SECTION

Typical-section Controls for the Jingzhang Pilot

A 12-m typical section addresses walking gaps, mixed traffic, limited rest and stormwater drainage

PILOT DELIVERY VIEW | accessible walk + rain garden + two-way cycling + human service

SECTION CONTROLS + ACCEPTANCE

12.0 m total | four continuous functional bands

No.	Item	Value	Description	Acceptance
01	WALKING	≥3.0 m	continuous clear width, tactile and kerb-ramp links	ACCEPT field width survey
02	STORMWATER	≥2.5 m	complete inflow, overflow and drainage route	ACCEPT hydraulic check + flow test
03	CYCLING	≥4.0 m	two-way operation with speed control at crossings	ACCEPT marking width + conflict review
04	SERVICE EDGE	≥2.5 m	seating, shade and staffed wayfinding	ACCEPT facility list + access audit

DELIVERY INTERFACES

- coordinate rail protection and maintenance access
- integrate street limits, utilities and existing trees
- retain physical wayfinding and human service during outages

spatial.json · generated-corridor-section.jpg · Beijing walk/cycle standards

section dimensions are developed with rail safety, street limits, utilities and existing trees

09

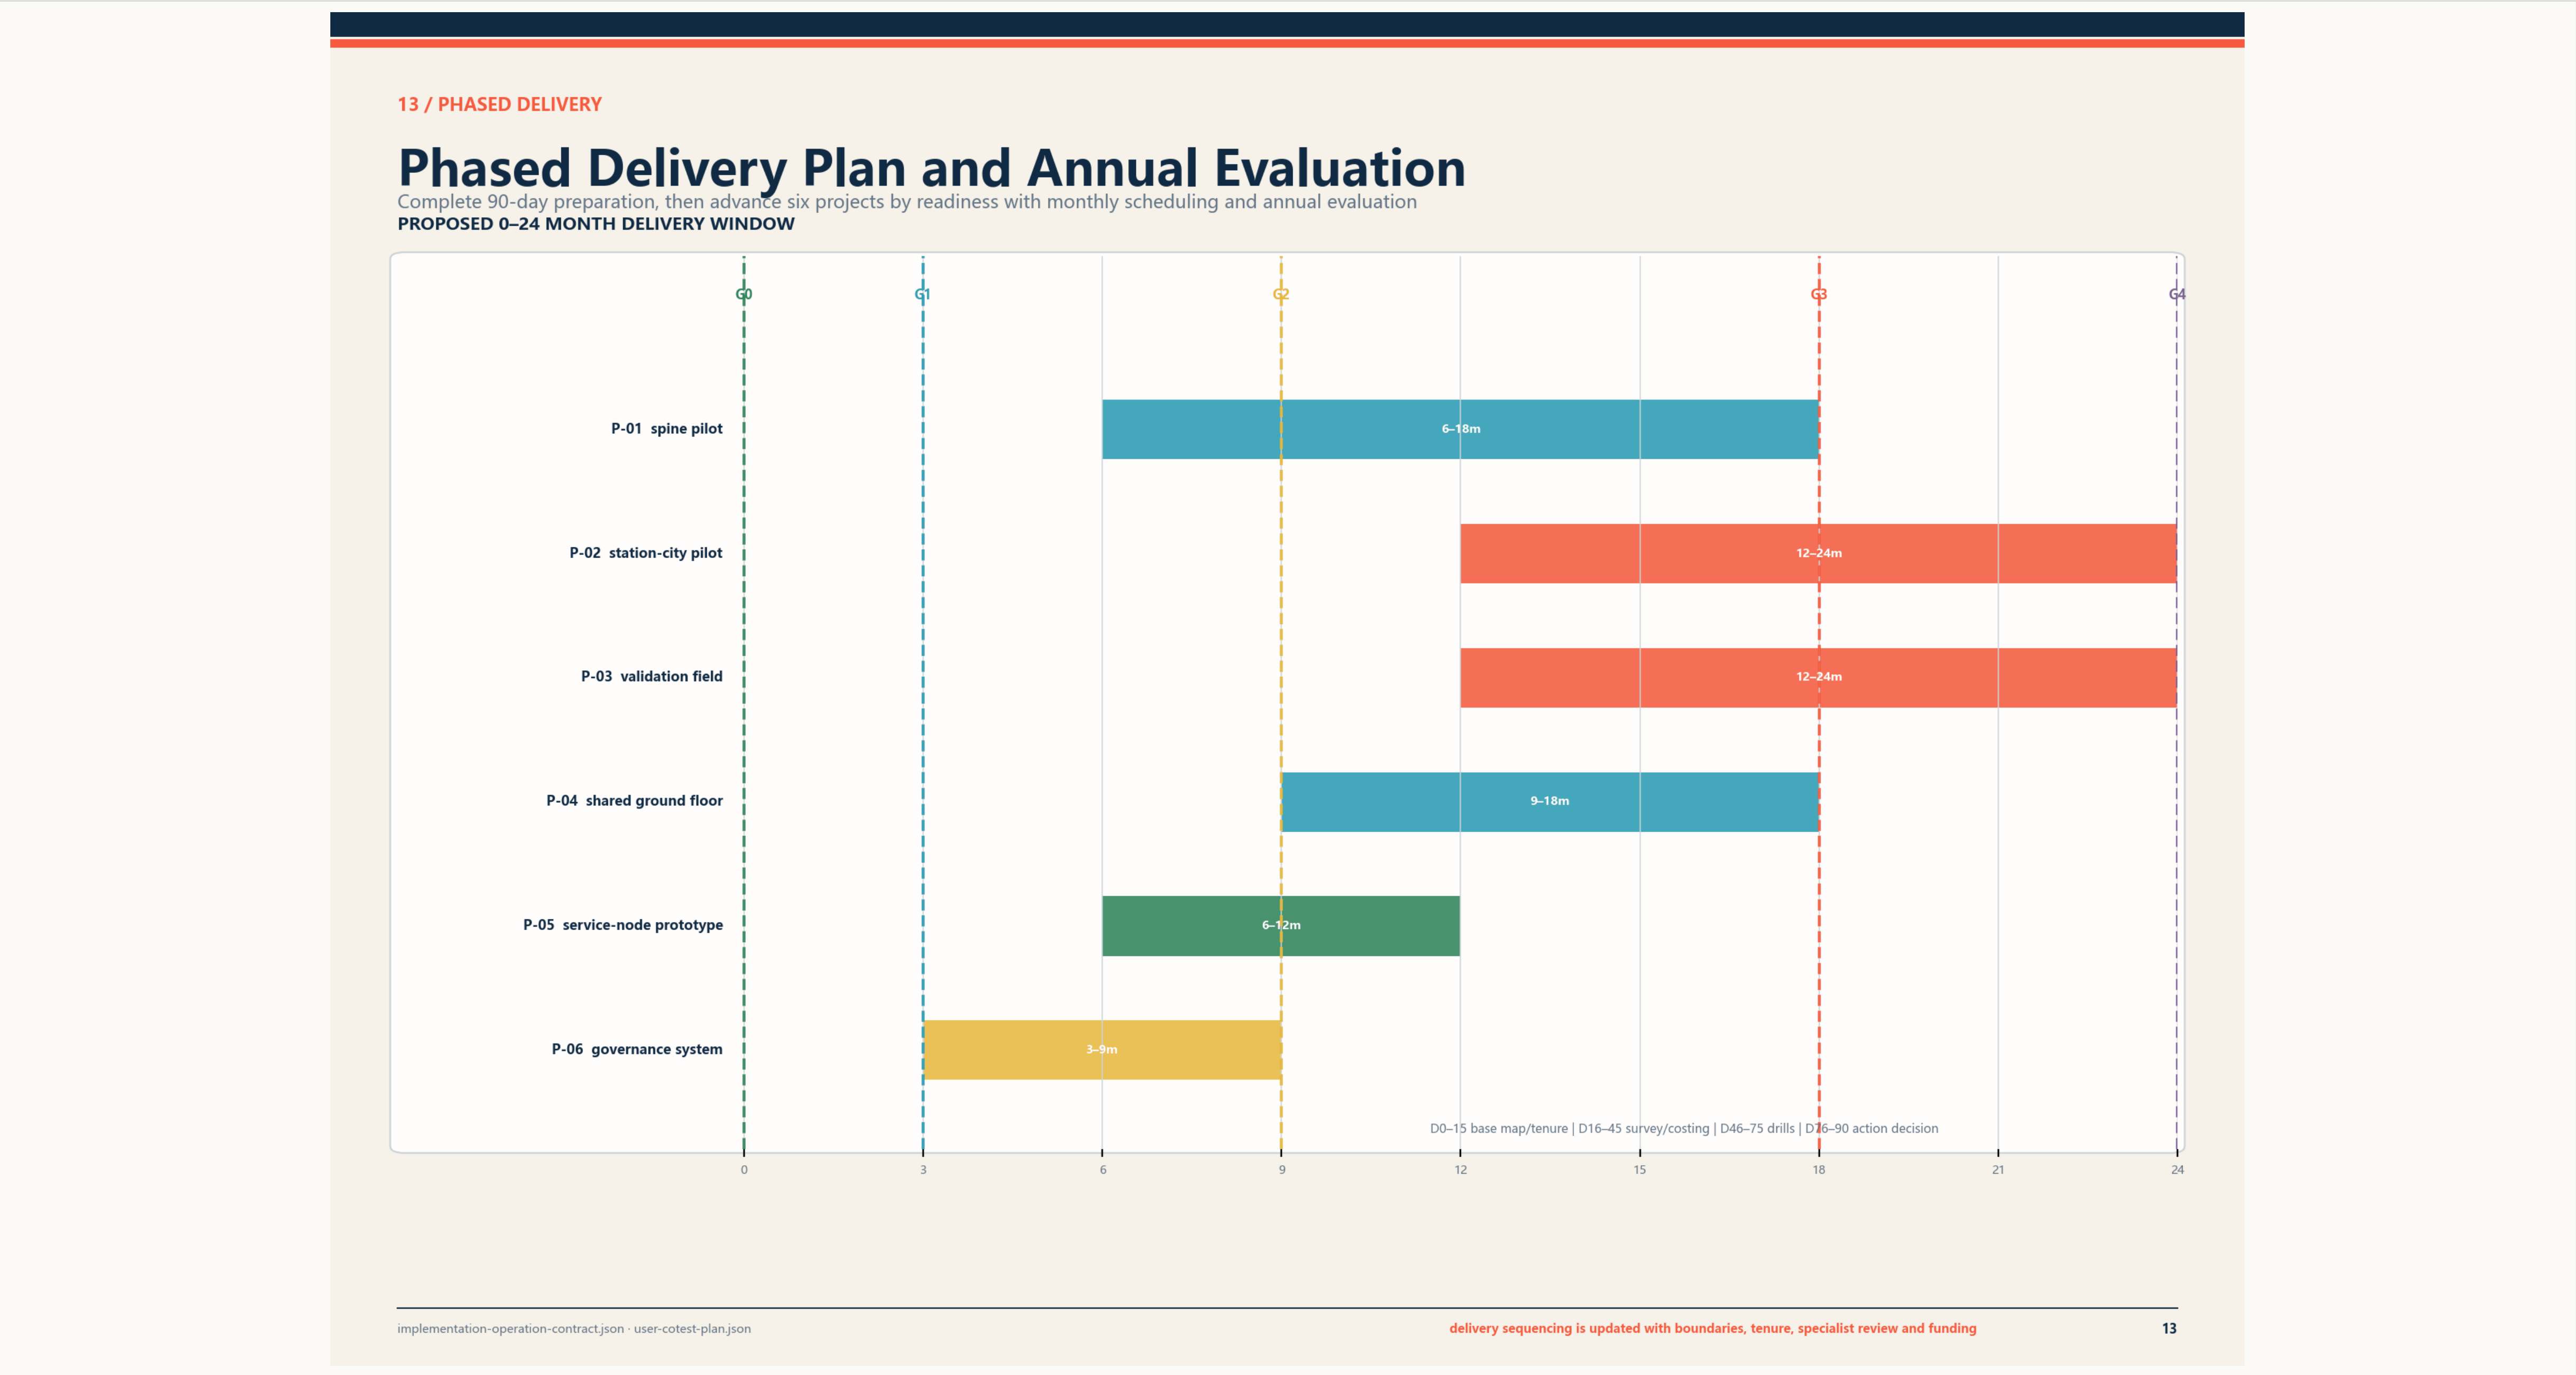

13 / PHASED DELIVERY

Phased Delivery Plan and Annual Evaluation

Complete 90-day preparation, then advance six projects by readiness with monthly scheduling and annual evaluation

PROPOSED 0–24 MONTH DELIVERY WINDOW

Project	Window
P-01 spine pilot	6–18m
P-02 station-city pilot	12–24m
P-03 validation field	12–24m
P-04 shared ground floor	9–18m
P-05 service-node prototype	6–12m
P-06 governance system	3–9m

D0–15 base map/tenure | D16–45 survey/costing | D46–75 drills | D76–90 action decision

implementation-operation-contract.json · user-cotest-plan.json

delivery sequencing is updated with boundaries, tenure, specialist review and funding

13

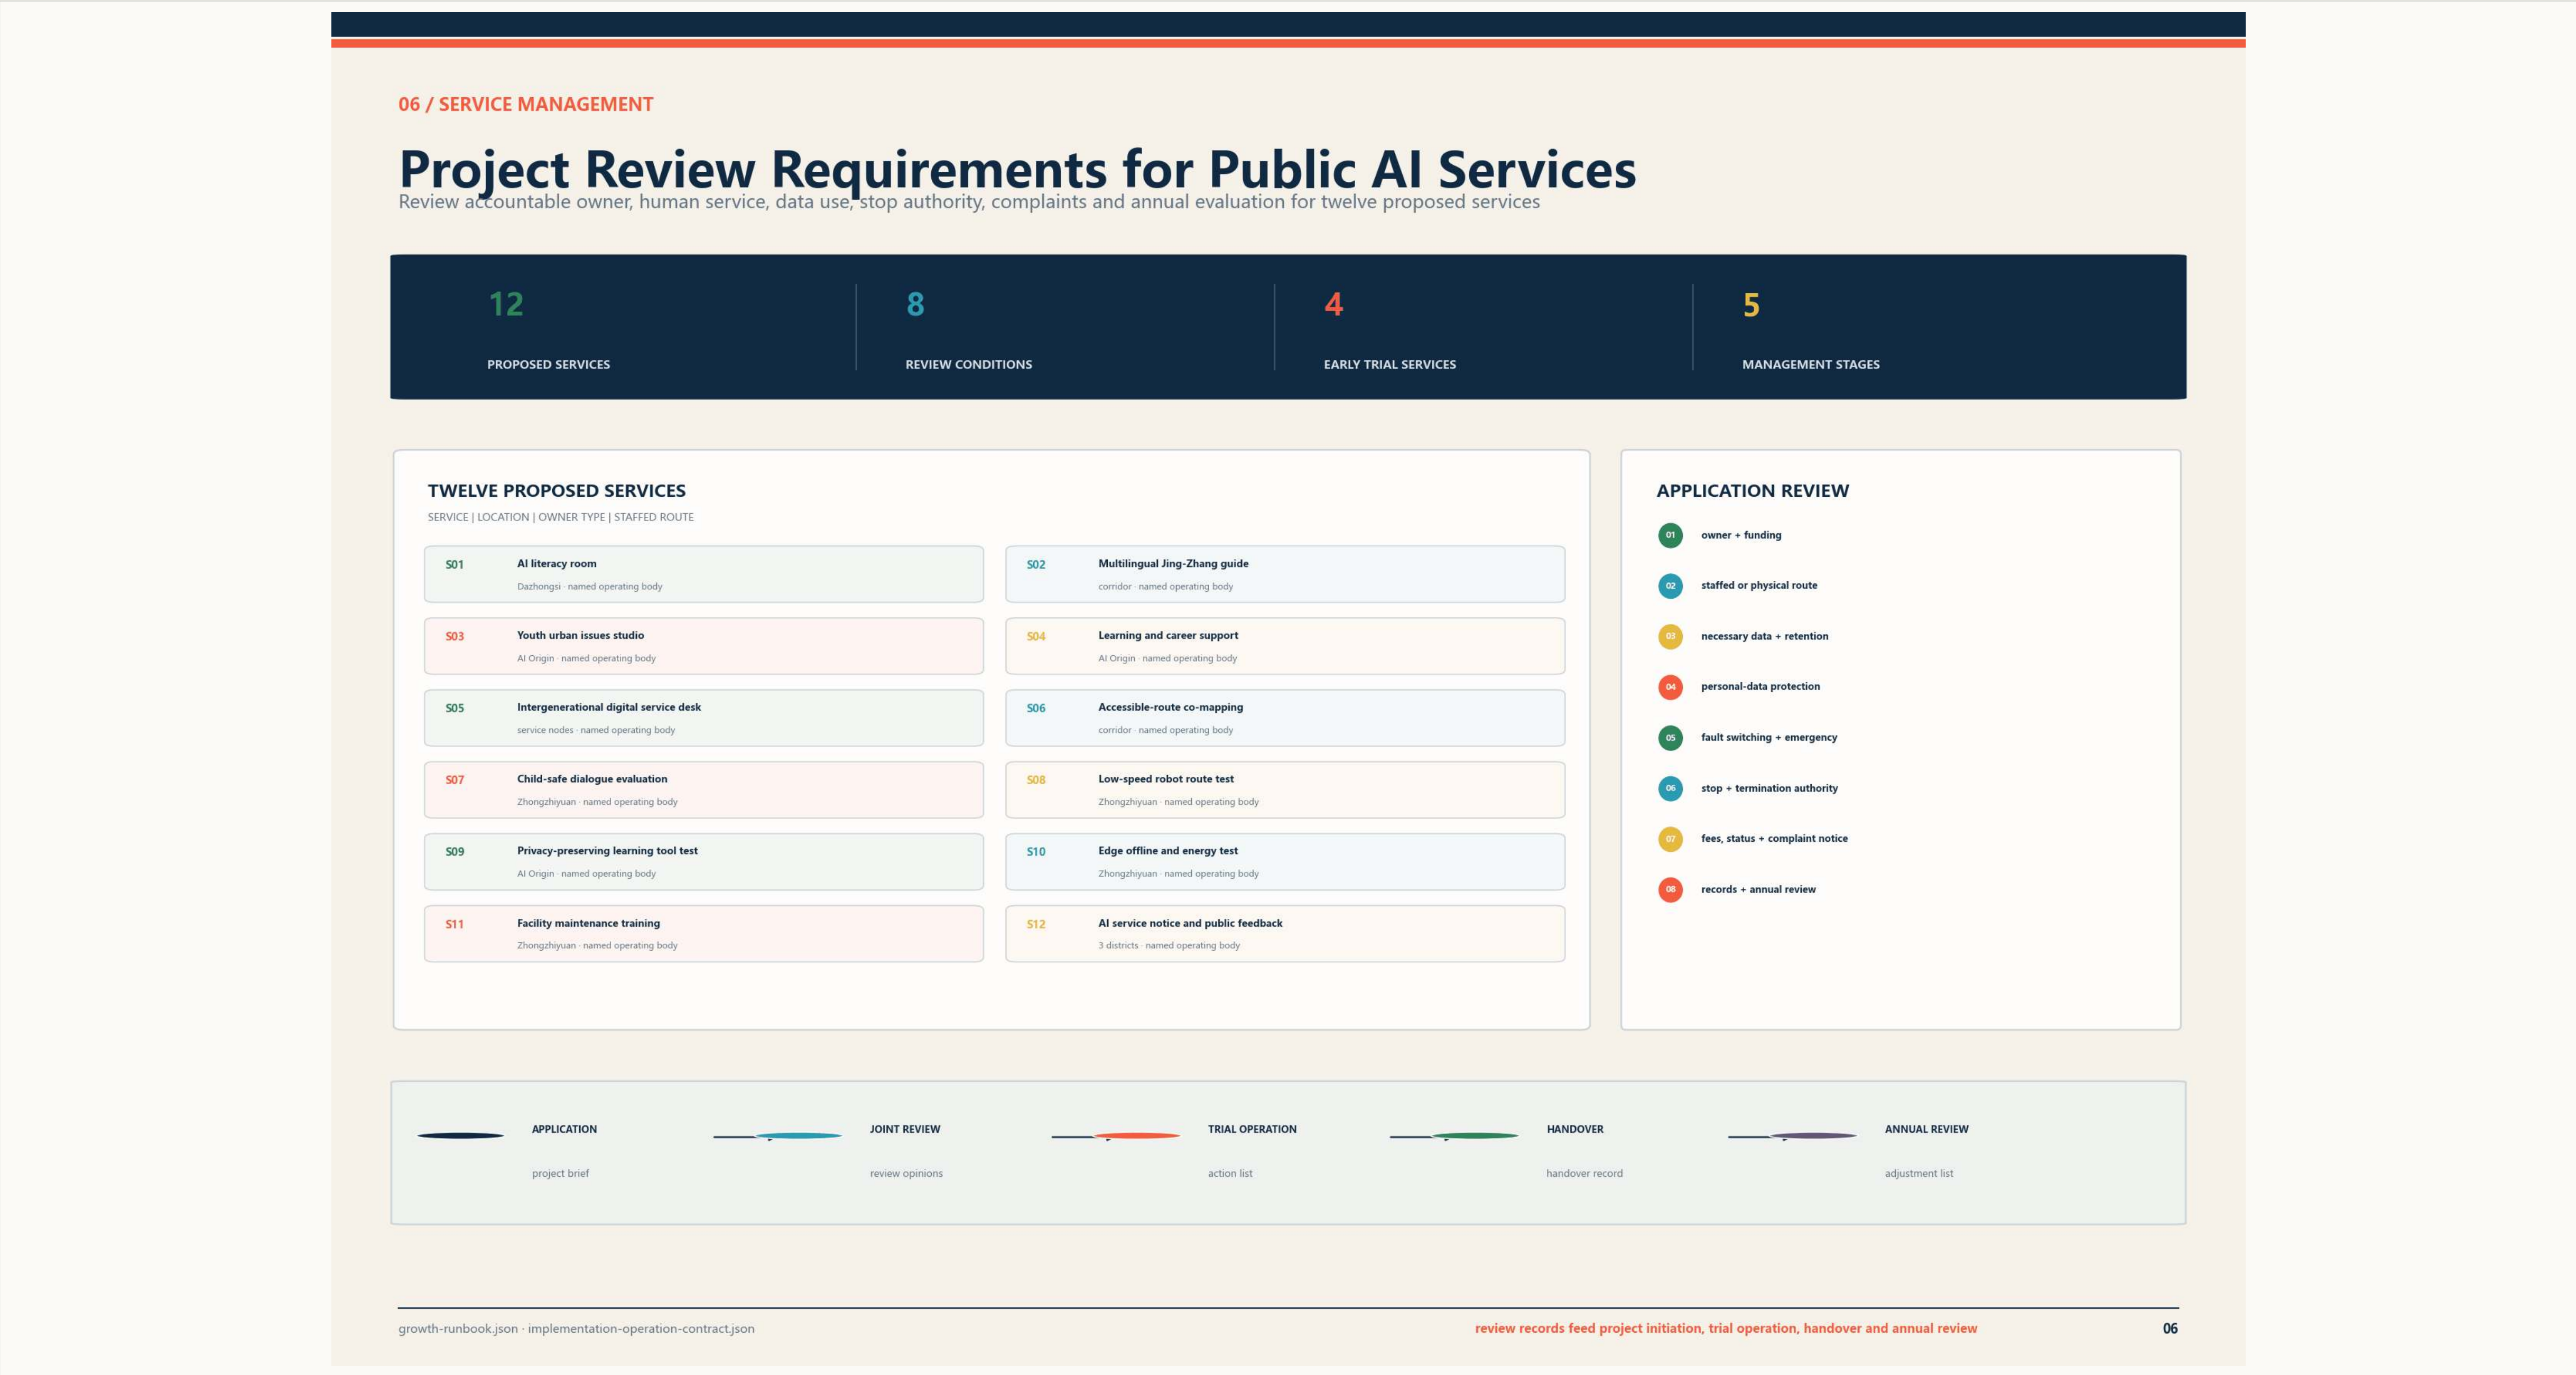

06 / SERVICE MANAGEMENT

Project Review Requirements for Public AI Services

Review accountable owner, human service, data use, stop authority, complaints and annual evaluation for twelve proposed services

12	8	4	5
PROPOSED SERVICES	REVIEW CONDITIONS	EARLY TRIAL SERVICES	MANAGEMENT STAGES

TWELVE PROPOSED SERVICES

SERVICE | LOCATION | OWNER TYPE | STAFFED ROUTE

No.	Service	Location · owner
S01	AI literacy room	Dazhongsi · named operating body
S02	Multilingual Jing-Zhang guide	corridor · named operating body
S03	Youth urban issues studio	AI Origin · named operating body
S04	Learning and career support	AI Origin · named operating body
S05	Intergenerational digital service desk	service nodes · named operating body
S06	Accessible-route co-mapping	corridor · named operating body
S07	Child-safe dialogue evaluation	Zhongzhiyuan · named operating body
S08	Low-speed robot route test	Zhongzhiyuan · named operating body
S09	Privacy-preserving learning tool test	AI Origin · named operating body
S10	Edge offline and energy test	Zhongzhiyuan · named operating body
S11	Facility maintenance training	Zhongzhiyuan · named operating body
S12	AI service notice and public feedback	3 districts · named operating body

APPLICATION REVIEW

01 owner + funding
02 staffed or physical route
03 necessary data + retention
04 personal-data protection
05 fault switching + emergency
06 stop + termination authority
07 fees, status + complaint notice
08 records + annual review

APPLICATION	JOINT REVIEW	TRIAL OPERATION	HANDOVER	ANNUAL REVIEW
project brief	review opinions	action list	handover record	adjustment list

growth-runbook.json · implementation-operation-contract.json

review records feed project initiation, trial operation, handover and annual review

06

Scenario impacts are not built-performance commitments; annual review and re-selection triggers remain explicit

CULTURE, GOVERNANCE & OPERATIONS Support Long-term Urban Life

Competition tasks remain complete but are separated from existing-condition spatial evidence

---

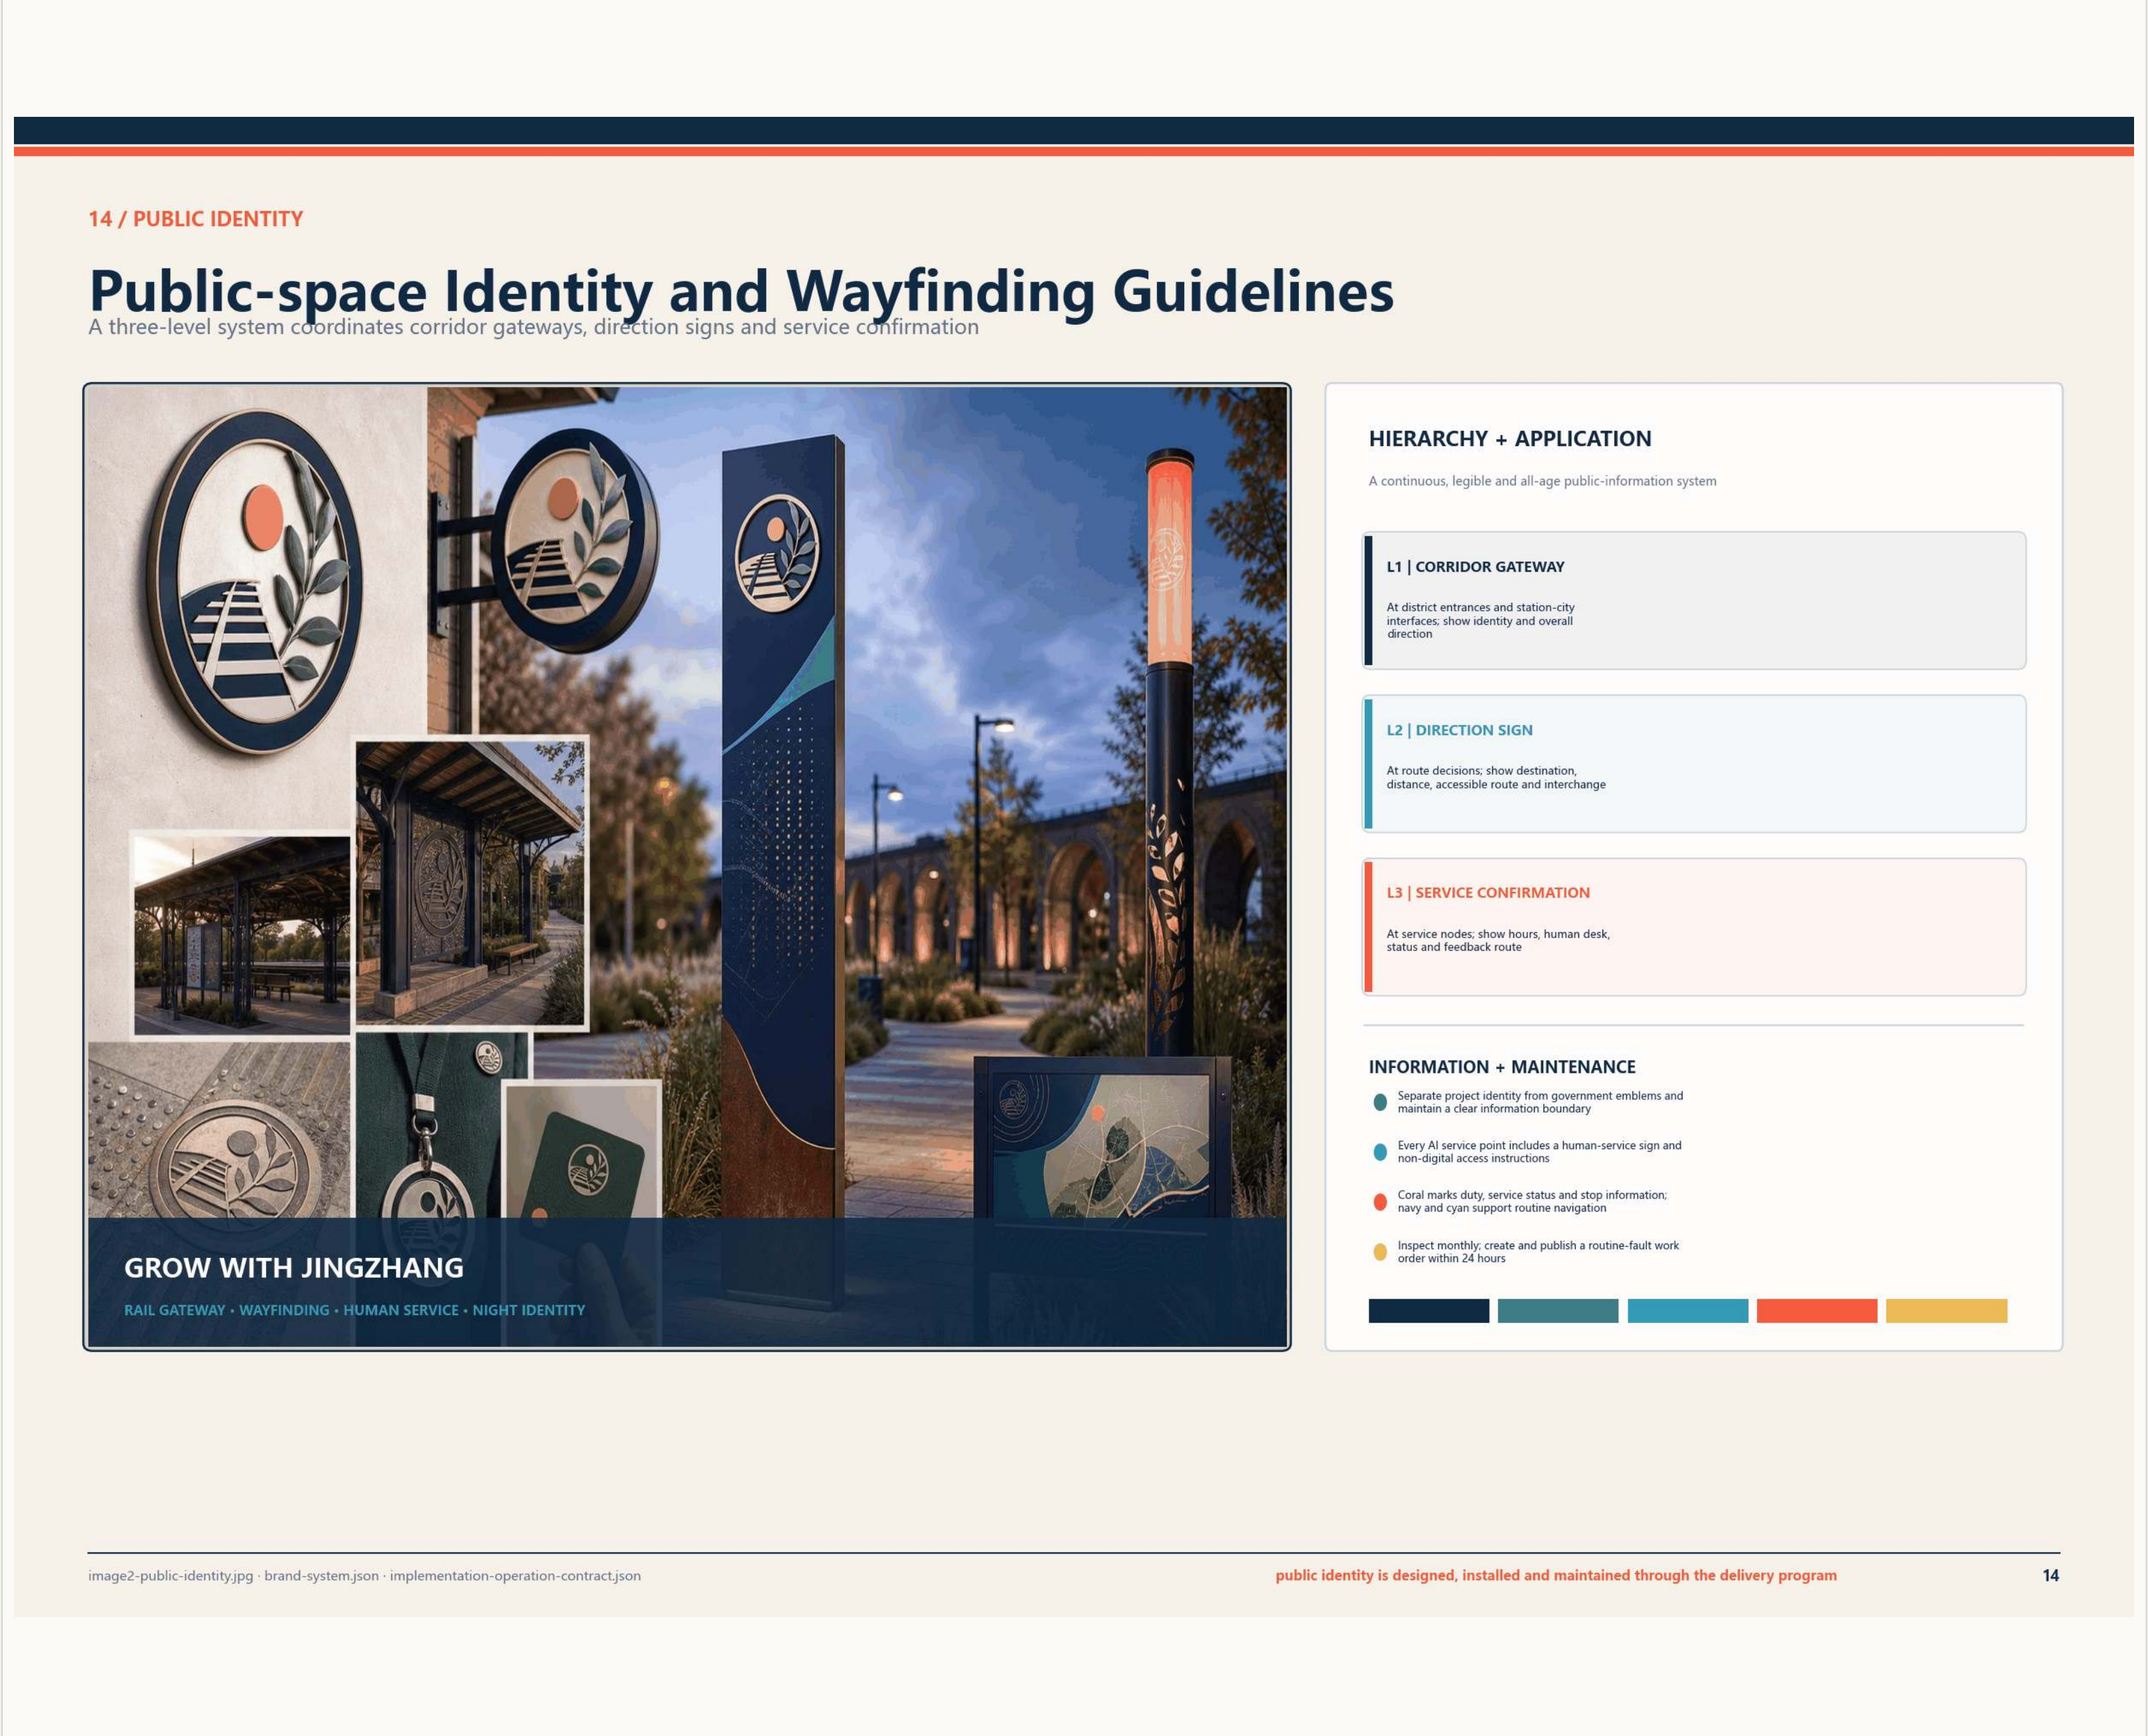

14 / PUBLIC IDENTITY

Public-space Identity and Wayfinding Guidelines

A three-level system coordinates corridor gateways, direction signs and service confirmation

HIERARCHY + APPLICATION

A continuous, legible and all-age public-information system

L1 | CORRIDOR GATEWAY

At district entrances and station-city interfaces; show identity and overall direction

L2 | DIRECTION SIGN

At route decisions; show destination, distance, accessible route and interchange

L3 | SERVICE CONFIRMATION

At service nodes; show hours, human desk, status and feedback route

INFORMATION + MAINTENANCE

- Separate project identity from government emblems and maintain a clear information boundary
- Every AI service point includes a human-service sign and non-digital access instructions
- Coral marks duty, service status and stop information; navy and cyan support routine navigation
- Inspect monthly; create and publish a routine-fault work order within 24 hours

image2-public-identity.jpg · brand-system.json · implementation-operation-contract.json

public identity is designed, installed and maintained through the delivery program

14

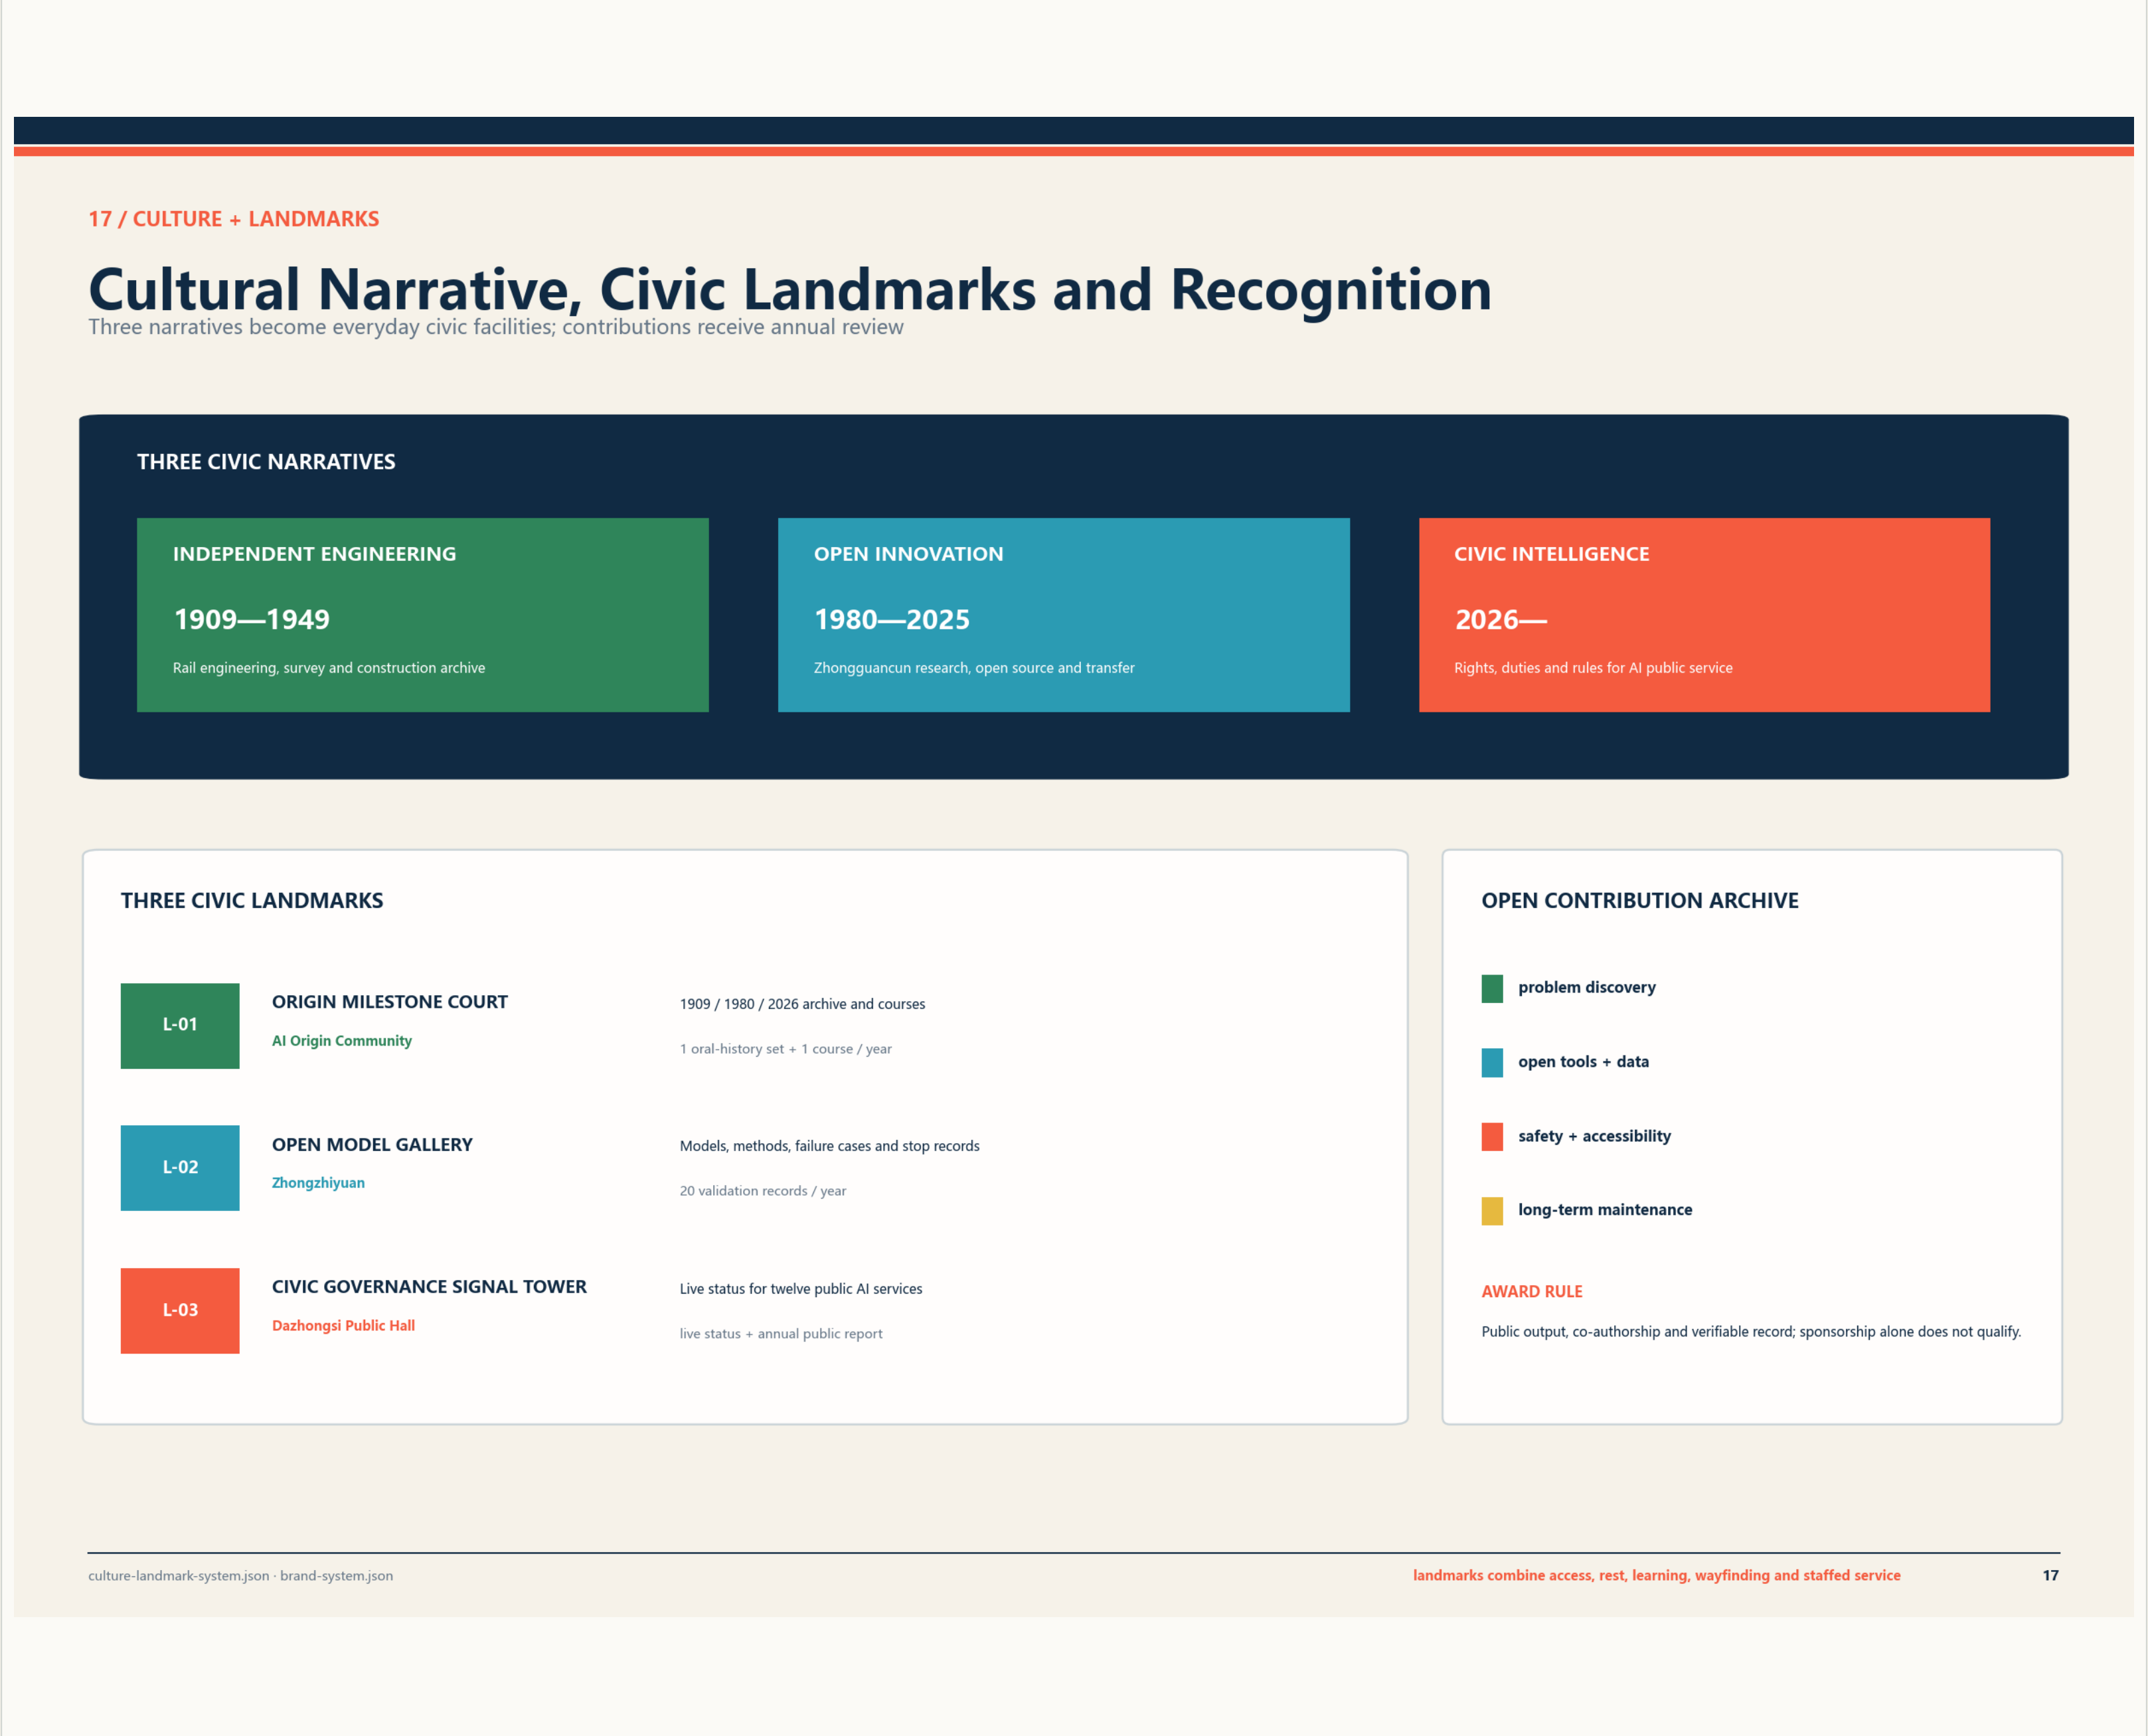

17 / CULTURE + LANDMARKS

Cultural Narrative, Civic Landmarks and Recognition

Three narratives become everyday civic facilities; contributions receive annual review

THREE CIVIC NARRATIVES

INDEPENDENT ENGINEERING	OPEN INNOVATION	CIVIC INTELLIGENCE
1909—1949	1980—2025	2026—
Rail engineering, survey and construction archive	Zhongguancun research, open source and transfer	Rights, duties and rules for AI public service

THREE CIVIC LANDMARKS

L-01	ORIGIN MILESTONE COURT AI Origin Community	1909 / 1980 / 2026 archive and courses	1 oral-history set + 1 course / year
L-02	OPEN MODEL GALLERY Zhongzhiyuan	Models, methods, failure cases and stop records	20 validation records / year
L-03	CIVIC GOVERNANCE SIGNAL TOWER Dazhongsi Public Hall	Live status for twelve public AI services	live status + annual public report

OPEN CONTRIBUTION ARCHIVE

- 🟩 problem discovery
- 🟦 open tools + data
- 🟥 safety + accessibility
- 🟨 long-term maintenance

AWARD RULE

Public output, co-authorship and verifiable record; sponsorship alone does not qualify.

culture-landmark-system.json · brand-system.json

landmarks combine access, rest, learning, wayfinding and staffed service

17

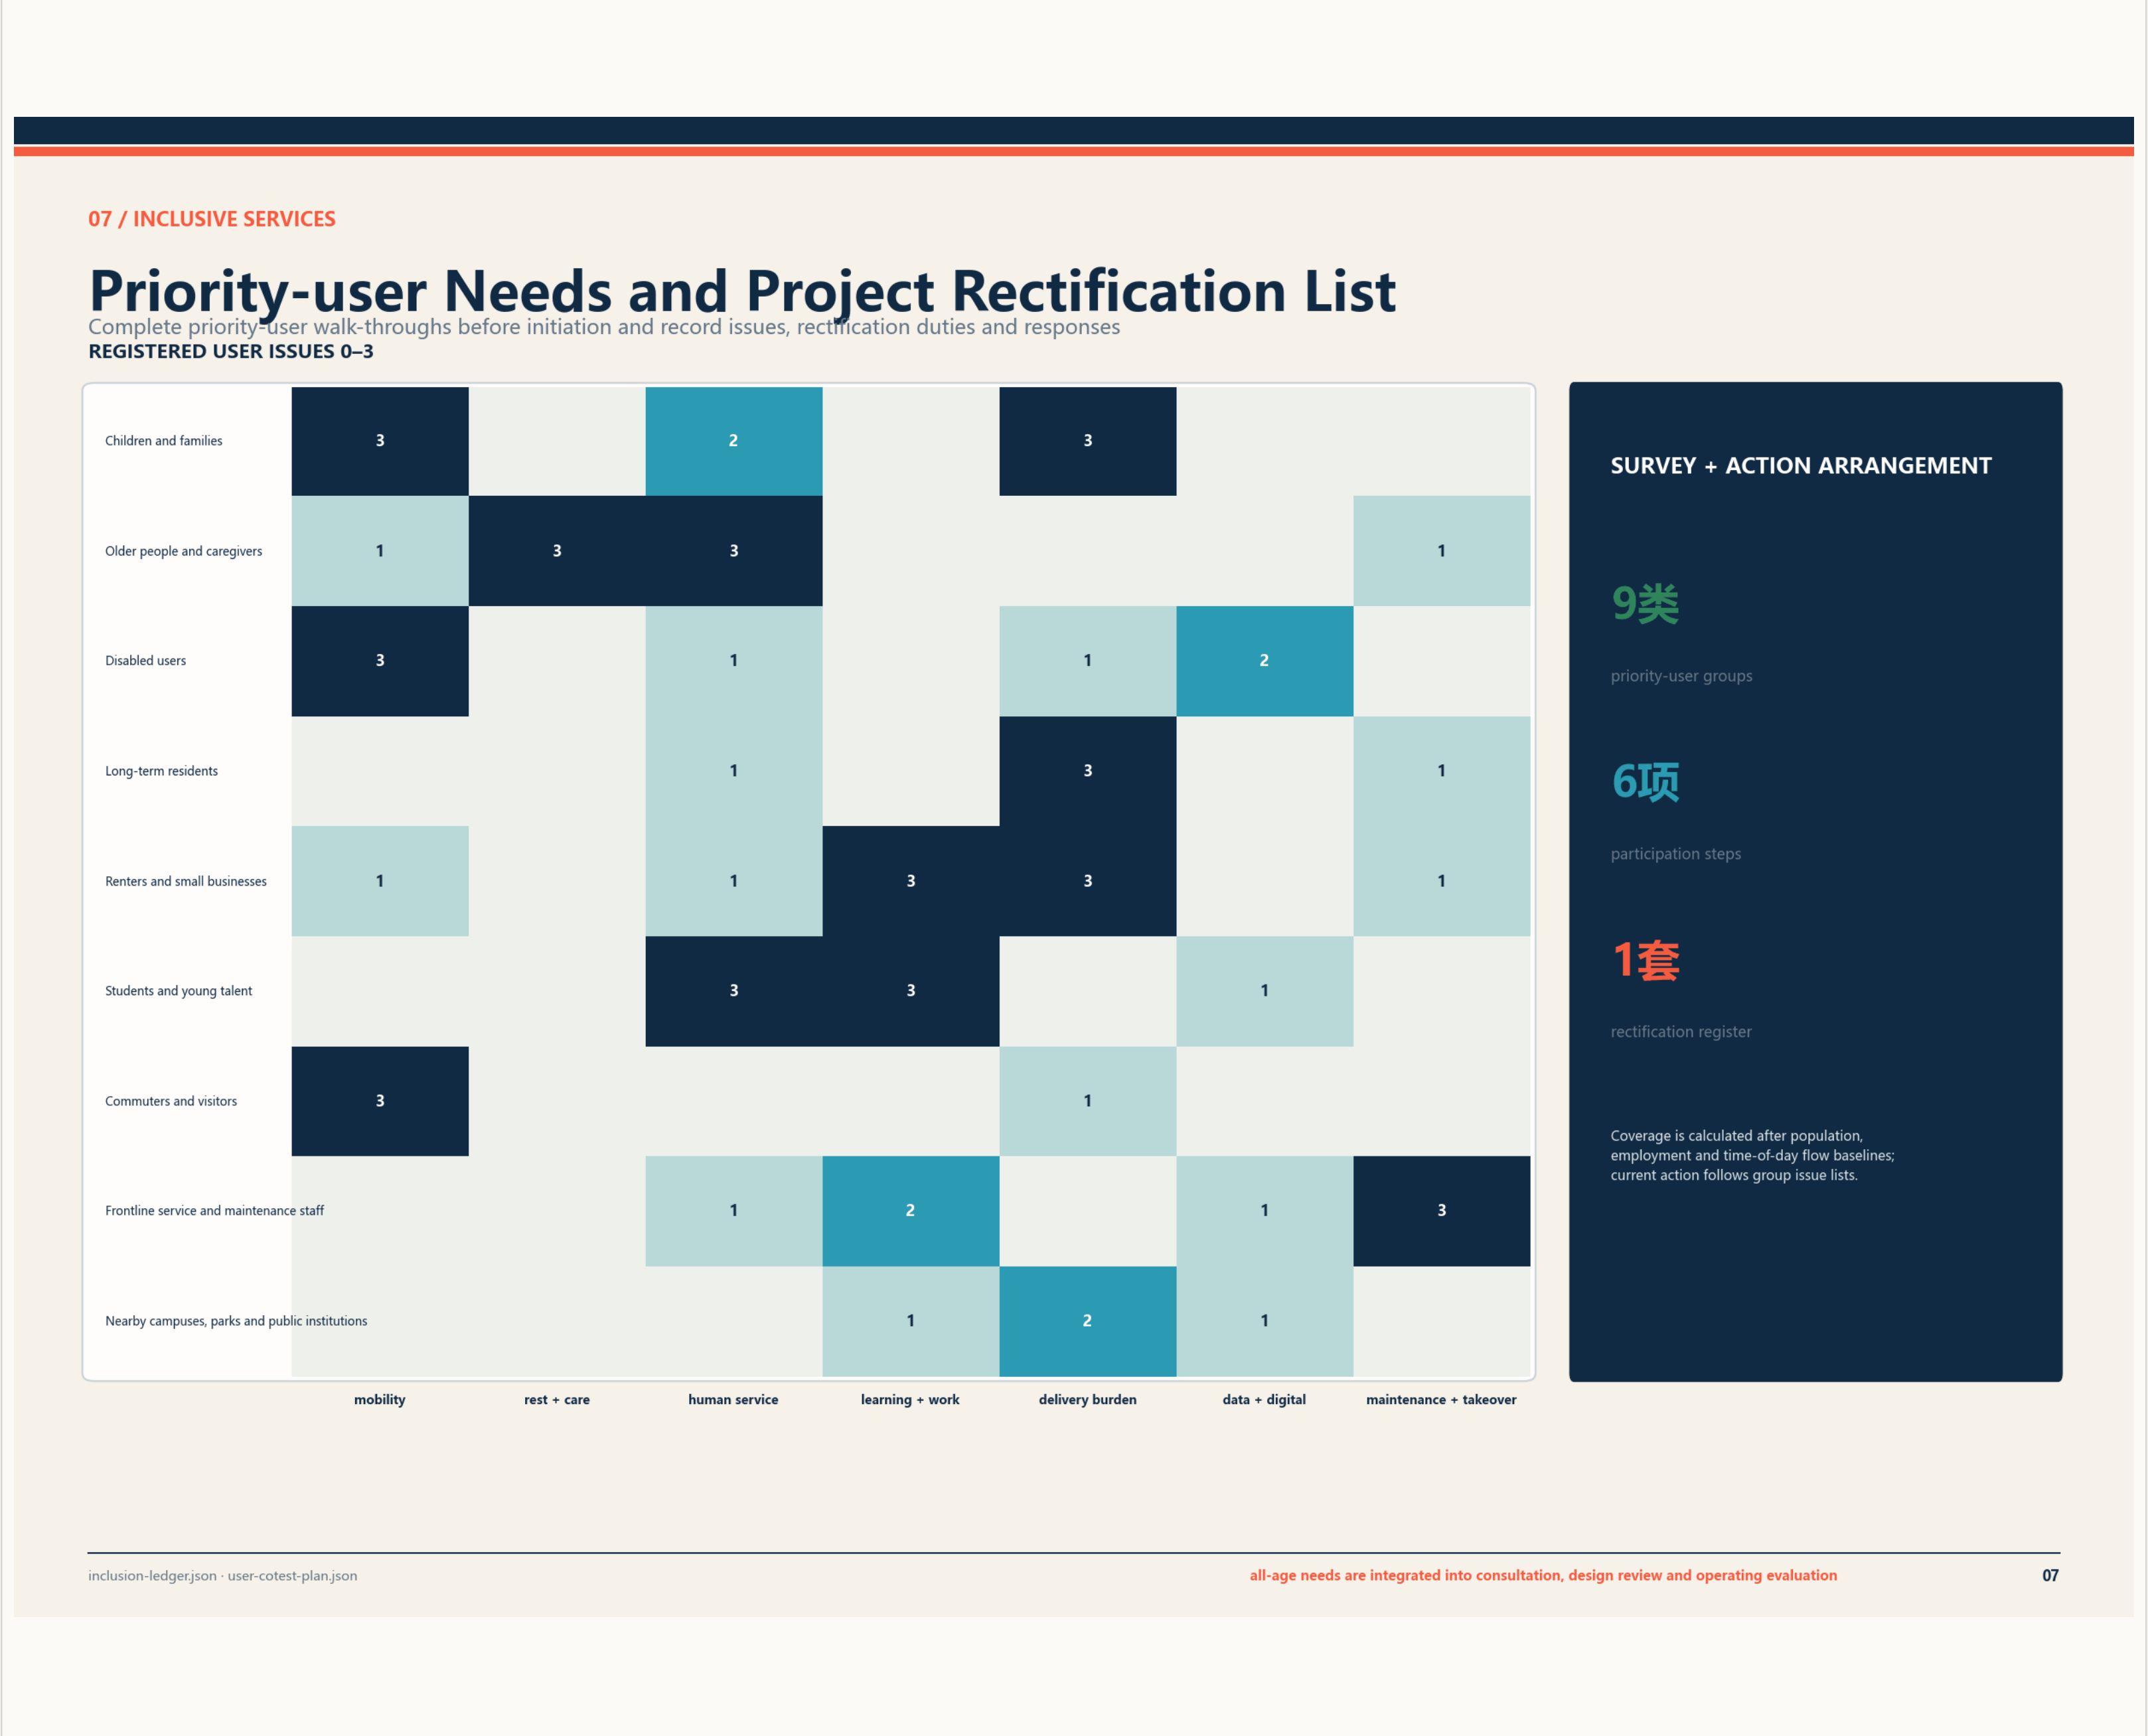

07 / INCLUSIVE SERVICES

Priority-user Needs and Project Rectification List

Complete priority-user walk-throughs before initiation and record issues, rectification duties and responses

REGISTERED USER ISSUES 0–3

	mobility	rest + care	human service	learning + work	delivery burden	data + digital	maintenance + takeover
Children and families	3		2		3		
Older people and caregivers	1	3	3				1
Disabled users	3		1		1	2	
Long-term residents			1		3		1
Renters and small businesses	1		1	3	3		1
Students and young talent			3	3		1	
Commuters and visitors	3				1		
Frontline service and maintenance staff			1	2		1	3
Nearby campuses, parks and public institutions				1	2	1	

SURVEY + ACTION ARRANGEMENT

9类

priority-user groups

6项

participation steps

1套

rectification register

Coverage is calculated after population, employment and time-of-day flow baselines; current action follows group issue lists.

inclusion-ledger.json · user-cotest-plan.json

all-age needs are integrated into consultation, design review and operating evaluation

07

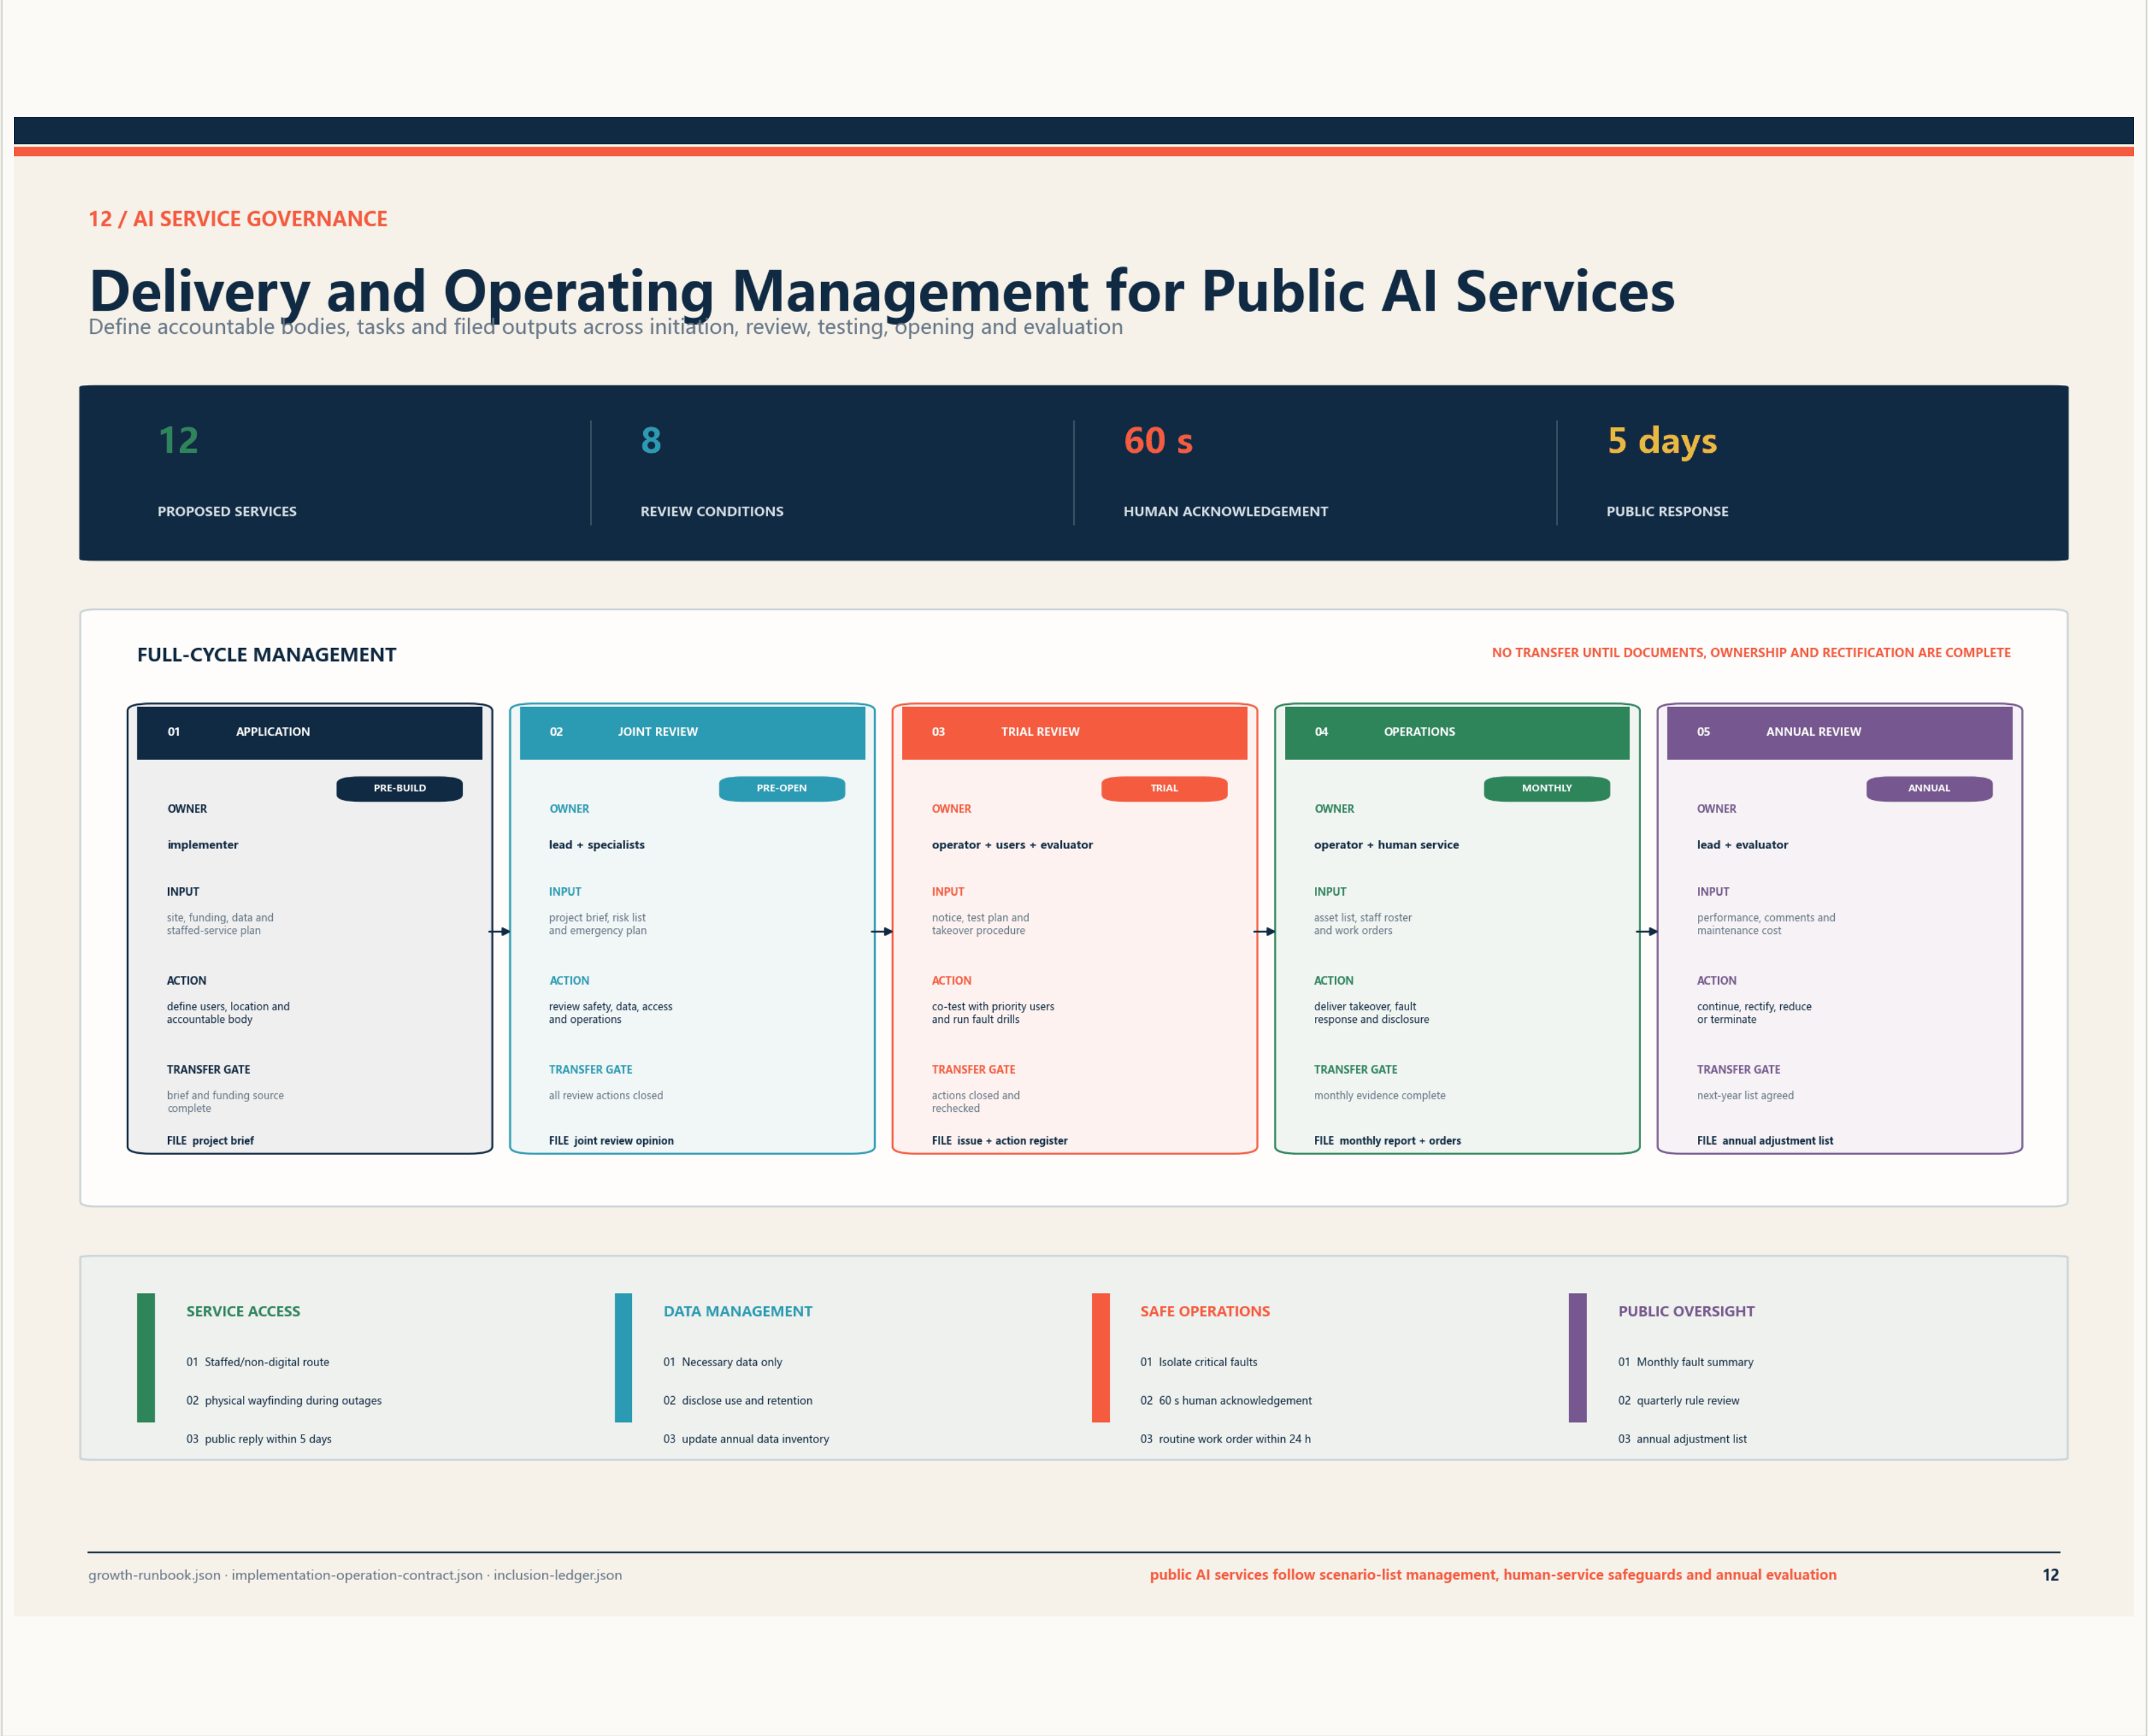

12 / AI SERVICE GOVERNANCE

Delivery and Operating Management for Public AI Services

Define accountable bodies, tasks and filed outputs across initiation, review, testing, opening and evaluation

12	8	60 s	5 days
PROPOSED SERVICES	REVIEW CONDITIONS	HUMAN ACKNOWLEDGEMENT	PUBLIC RESPONSE

FULL-CYCLE MANAGEMENT

NO TRANSFER UNTIL DOCUMENTS, OWNERSHIP AND RECTIFICATION ARE COMPLETE

	01 APPLICATION	02 JOINT REVIEW	03 TRIAL REVIEW	04 OPERATIONS	05 ANNUAL REVIEW
	PRE-BUILD	PRE-OPEN	TRIAL	MONTHLY	ANNUAL
OWNER	implementer	lead + specialists	operator + users + evaluator	operator + human service	lead + evaluator
INPUT	site, funding, data and staffed-service plan	project brief, risk list and emergency plan	notice, test plan and takeover procedure	asset list, staff roster and work orders	performance, comments and maintenance cost
ACTION	define users, location and accountable body	review safety, data, access and operations	co-test with priority users and run fault drills	deliver takeover, fault response and disclosure	continue, rectify, reduce or terminate
TRANSFER GATE	brief and funding source complete	all review actions closed	actions closed and rechecked	monthly evidence complete	next-year list agreed
FILE	project brief	joint review opinion	issue + action register	monthly report + orders	annual adjustment list

SERVICE ACCESS

01 Staffed/non-digital route
02 physical wayfinding during outages
03 public reply within 5 days

DATA MANAGEMENT

01 Necessary data only
02 disclose use and retention
03 update annual data inventory

SAFE OPERATIONS

01 Isolate critical faults
02 60 s human acknowledgement
03 routine work order within 24 h

PUBLIC OVERSIGHT

01 Monthly fault summary
02 quarterly rule review
03 annual adjustment list

growth-runbook.json · implementation-operation-contract.json · inclusion-ledger.json

public AI services follow scenario-list management, human-service safeguards and annual evaluation

12

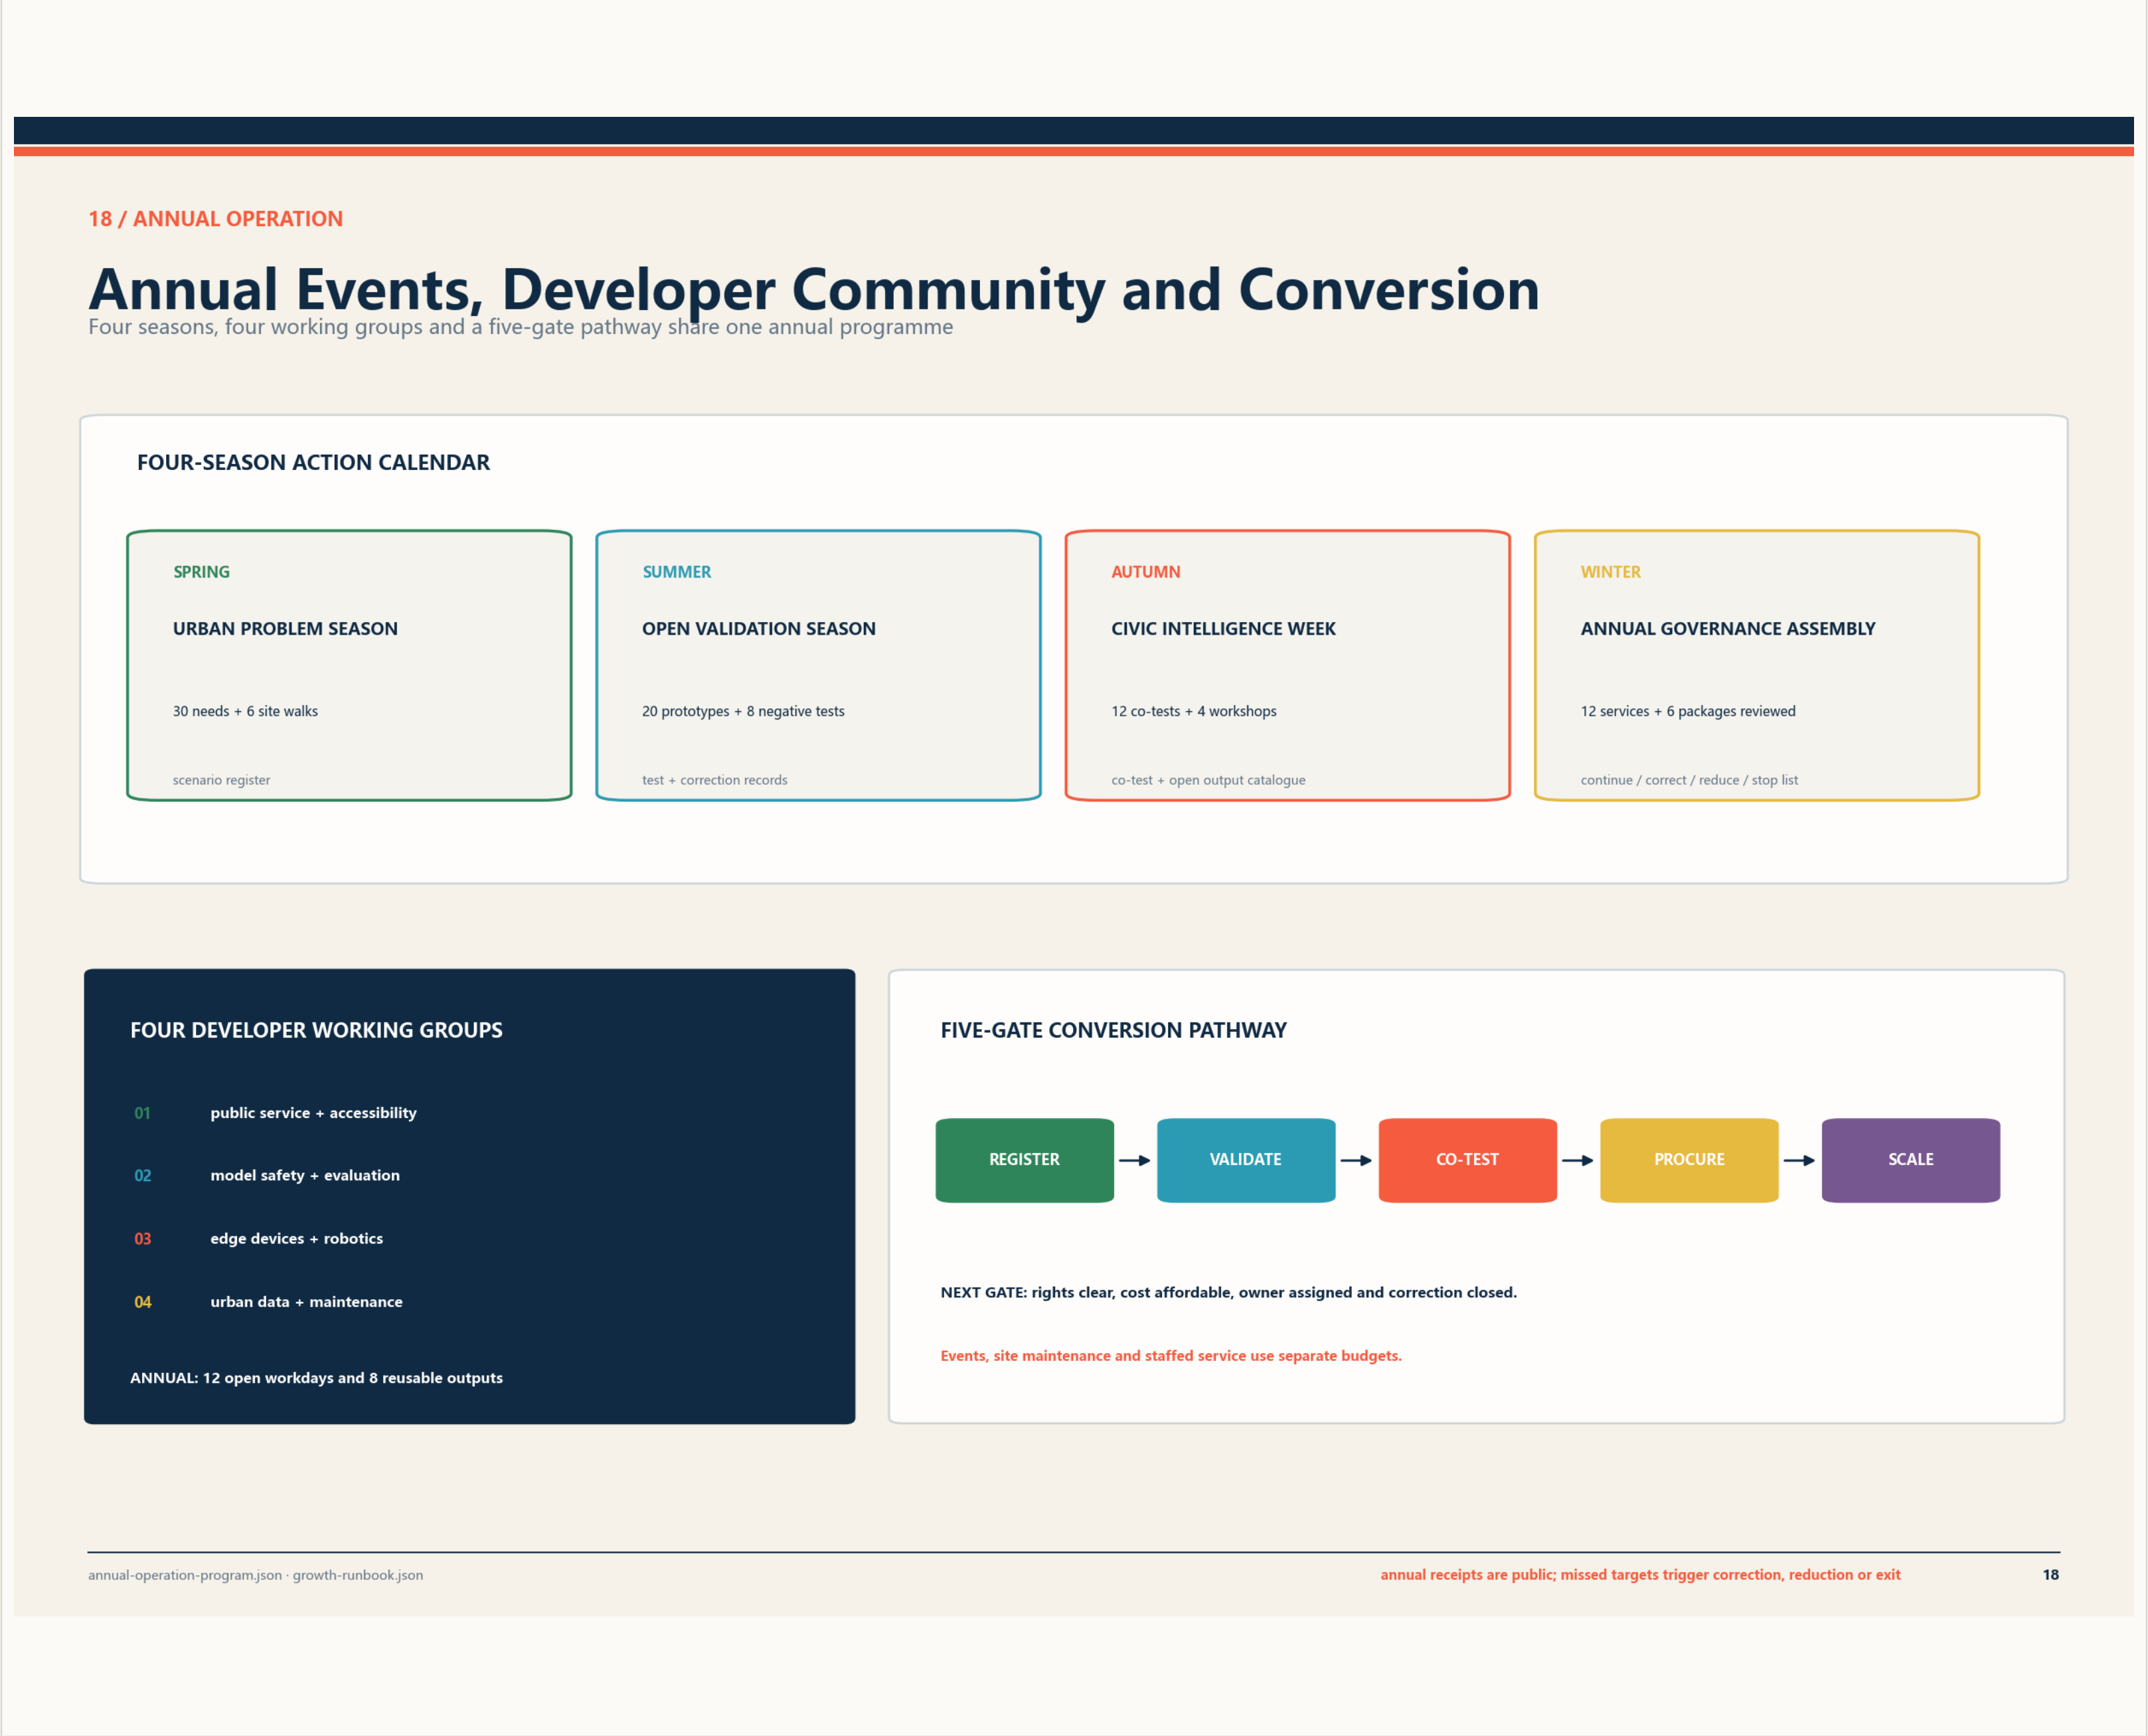

18 / ANNUAL OPERATION

Annual Events, Developer Community and Conversion

Four seasons, four working groups and a five-gate pathway share one annual programme

FOUR-SEASON ACTION CALENDAR

SPRING	SUMMER	AUTUMN	WINTER
URBAN PROBLEM SEASON	OPEN VALIDATION SEASON	CIVIC INTELLIGENCE WEEK	ANNUAL GOVERNANCE ASSEMBLY
30 needs + 6 site walks	20 prototypes + 8 negative tests	12 co-tests + 4 workshops	12 services + 6 packages reviewed
scenario register	test + correction records	co-test + open output catalogue	continue / correct / reduce / stop list

FOUR DEVELOPER WORKING GROUPS

01 public service + accessibility
02 model safety + evaluation
03 edge devices + robotics
04 urban data + maintenance

ANNUAL: 12 open workdays and 8 reusable outputs

FIVE-GATE CONVERSION PATHWAY

REGISTER → VALIDATE → CO-TEST → PROCURE → SCALE

NEXT GATE: rights clear, cost affordable, owner assigned and correction closed.

Events, site maintenance and staffed service use separate budgets.

annual-operation-program.json · growth-runbook.json

annual receipts are public; missed targets trigger correction, reduction or exit

18

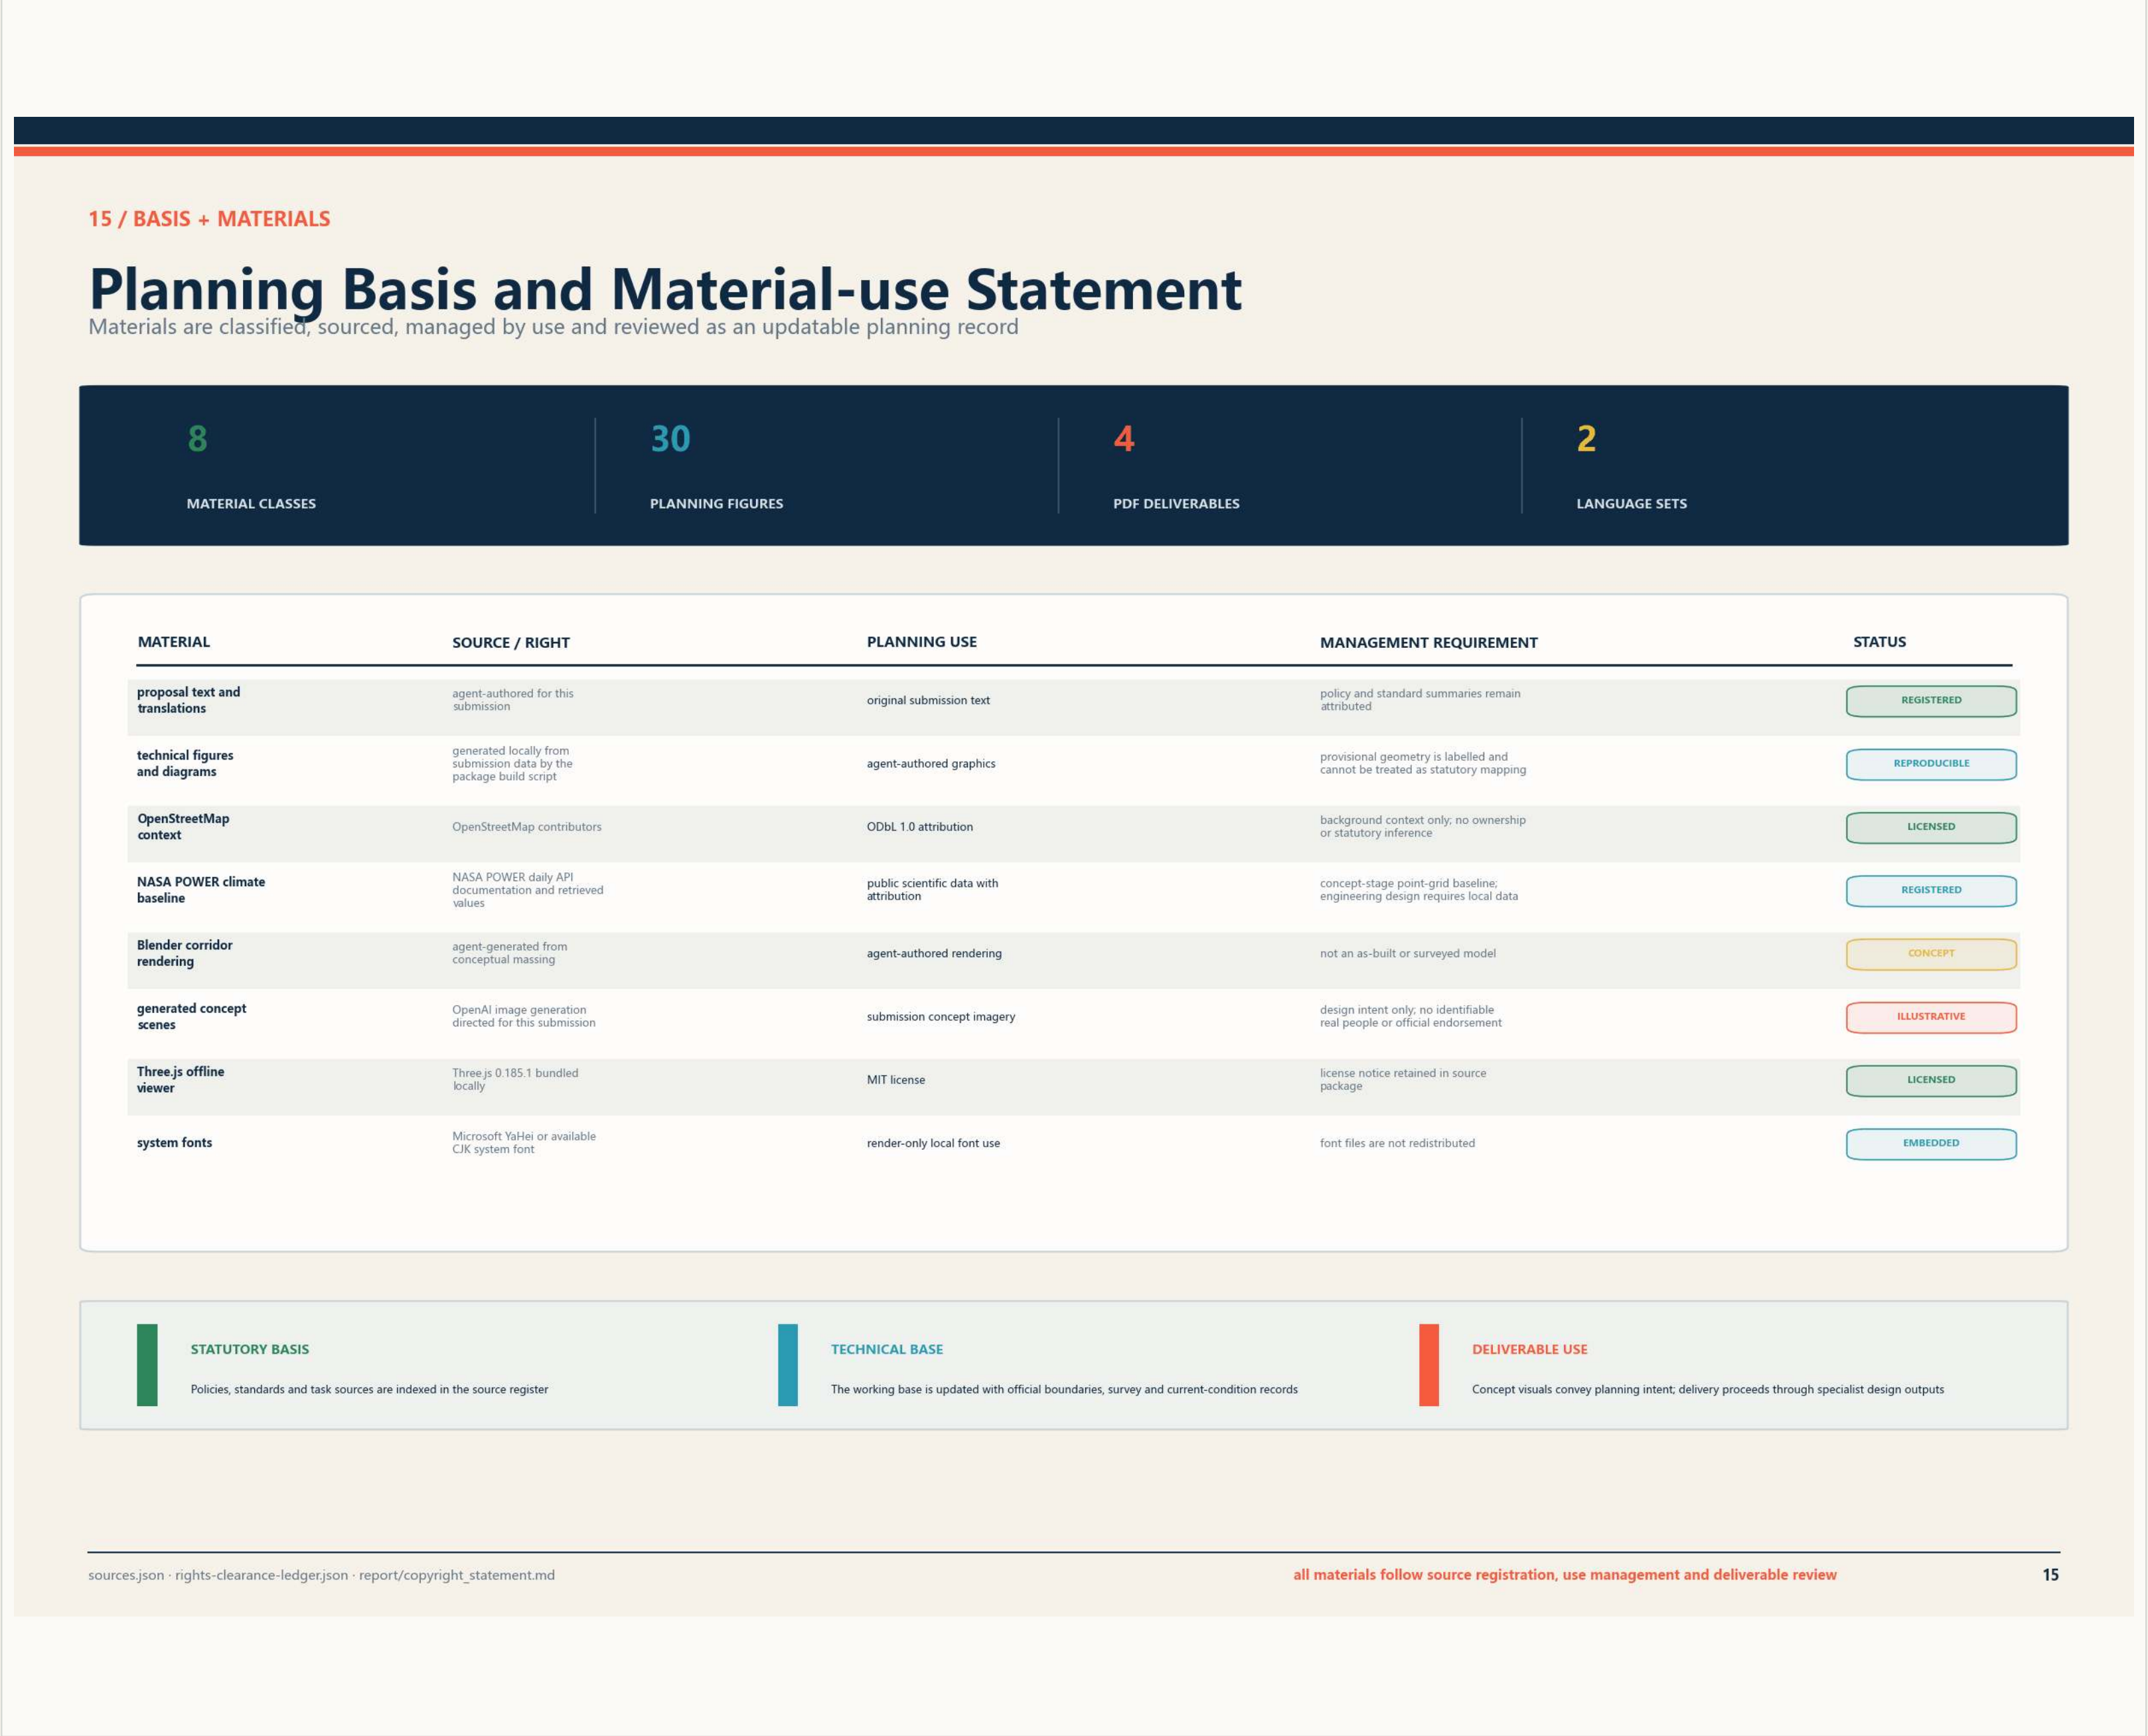

15 / BASIS + MATERIALS

Planning Basis and Material-use Statement

Materials are classified, sourced, managed by use and reviewed as an updatable planning record

8	30	4	2
MATERIAL CLASSES	PLANNING FIGURES	PDF DELIVERABLES	LANGUAGE SETS

MATERIAL	SOURCE / RIGHT	PLANNING USE	MANAGEMENT REQUIREMENT	STATUS
proposal text and translations	agent-authored for this submission	original submission text	policy and standard summaries remain attributed	REGISTERED
technical figures and diagrams	generated locally from submission data by the package build script	agent-authored graphics	provisional geometry is labelled and cannot be treated as statutory mapping	REPRODUCIBLE
OpenStreetMap context	OpenStreetMap contributors	ODbL 1.0 attribution	background context only; no ownership or statutory inference	LICENSED
NASA POWER climate baseline	NASA POWER daily API documentation and retrieved values	public scientific data with attribution	concept-stage point-grid baseline; engineering design requires local data	REGISTERED
Blender corridor rendering	agent-generated from conceptual massing	agent-authored rendering	not an as-built or surveyed model	CONCEPT
generated concept scenes	OpenAI image generation directed for this submission	submission concept imagery	design intent only; no identifiable real people or official endorsement	ILLUSTRATIVE
Three.js offline viewer	Three.js 0.185.1 bundled locally	MIT license	license notice retained in source package	LICENSED
system fonts	Microsoft YaHei or available CJK system font	render-only local font use	font files are not redistributed	EMBEDDED

STATUTORY BASIS

Policies, standards and task sources are indexed in the source register

TECHNICAL BASE

The working base is updated with official boundaries, survey and current-condition records

DELIVERABLE USE

Concept visuals convey planning intent; delivery proceeds through specialist design outputs

sources.json · rights-clearance-ledger.json · report/copyright_statement.md

all materials follow source registration, use management and deliverable review

15

Completed: Sentinel-2 green derivative + conservative official-facility validation. Unresolved: formal boundary/tenure, utilities, fire/accessibility and field survey