

JINGZHANG GROWTH MESH

AI TALENT AND ENTERPRISE CO-LIVING COMMUNITY

Universities and leading firms are anchors; the district is an incubator; community is infrastructure.



Universities and leading firms are anchors; the district is an incubator; community is infrastructure. The project supplies the missing urban interface from talent relationships to projects, teams, firms and public return.

01 | PROBLEM EVIDENCE

E0 official: complex rail/cross movement, breaks, multiple actors and segment differences. E3 pending: actual flows, accessibility barriers and interface demand.

Survey, observe 24 time slices and verify rights, fire and clearance; E3 evidence cannot directly trigger works.

02 | LOCATED PLAN

One public innovation axis links verification at Zhongzhiyuan, incubation at AI Origin and conversion at Dazhongsi; 15 projects and six stitches are GeoJSON-located.

The three cores test credibility, team formation and first orders; the wings supply services and real-world testing.


03 | DELIVERY LOOP

A 90-day pilot starts Z1 validation, O1 project clinic and D1 first-order matching. Each binds an owner, cost class, deliverable, evidence and stop gate.

D0–30 baseline; D31–60 reversible operation; D61–90 human review decides continue, adjust or exit.

LOCATABLE EVIDENCE FOR ALL SEVEN REVIEW DIMENSIONS

Brief alignment	three scopes + three zones/two wings + three test chains	MAP-A1/A3
Originality	park–city–network + seven evidence gates + actor reproduction	DIA-01/02
AI planning	recommend–human authorize–log–appeal–shutdown	governance contract
Feasibility	15 contracts + WP0–6 + 90-day pilot	pp.29–44
Public value	anonymous passage, resident seats, affordable hours, access	public clauses
Risk	E0/E1/E3, stop gates and professional sign-off	risk register
Completeness	plan–detail–section–view–contract–metric from one source	full package

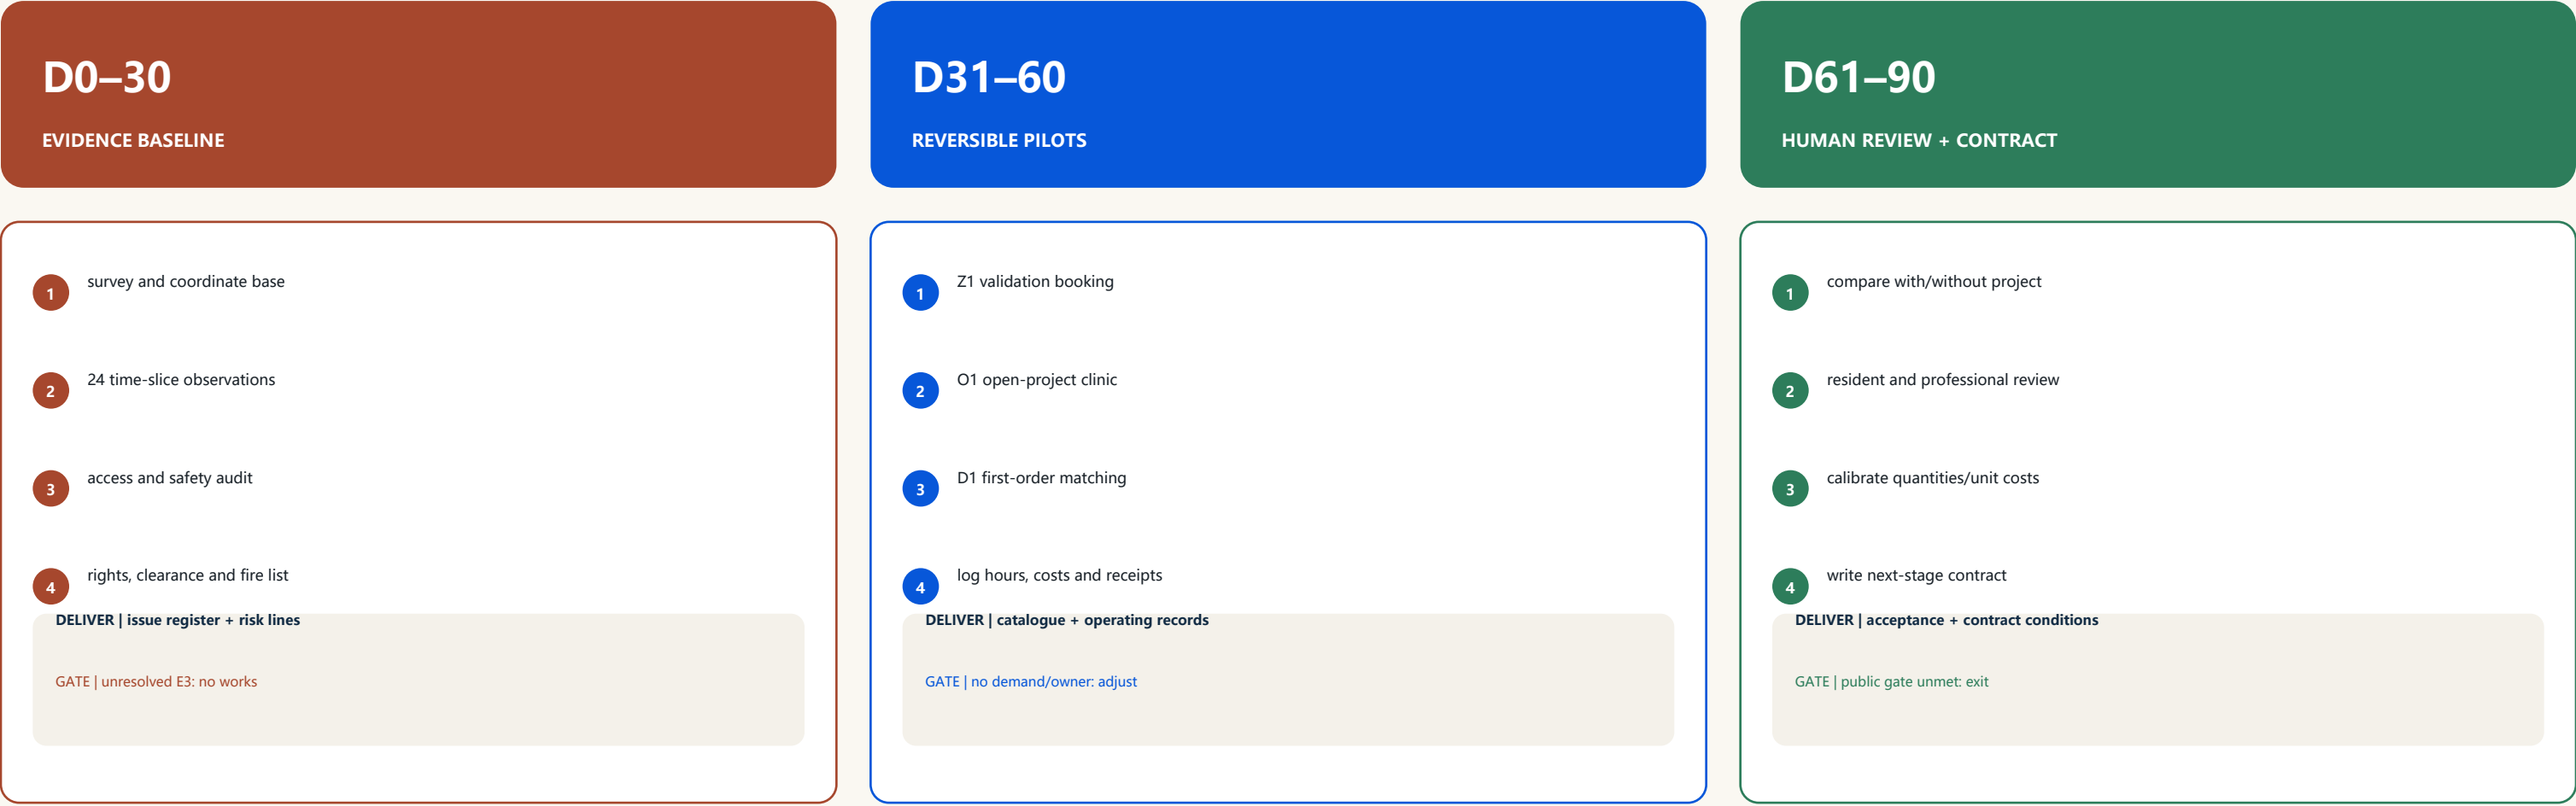

THREE FIRST CONTRACTS: SPACE, RESPONSIBILITY, MEASUREMENT AND ACCEPTANCE


Contract	Space / operating task	Responsibility / sign-off	Cost measure	Acceptance evidence
Z1 shared validation	bookable unit; separate testing and people	core operator + equipment partner; signed review	equipment hours, staff hours, signed record	safe boundary + valid test receipt
O1 open-project clinic	Origin lounge; day/night and quiet edge	community operator + mentors; conflict disclosure	mentor hours, open hours, project roadmap	named owner and next action
D1 first-order centre	service street: brief–test–compliance–buy	service operator + buyer + compliance body	brief, test and professional hours	procurement receipt or reason to exit

Cost accounts separate space, equipment, professional service and public duty; no total investment, rent or payback before survey, inquiry and approval.

MAP-A1

REGIONAL POSITION AND INNOVATION ANCHORS

A continuous innovation belt linking universities, institutes, transit and three differentiated cores.

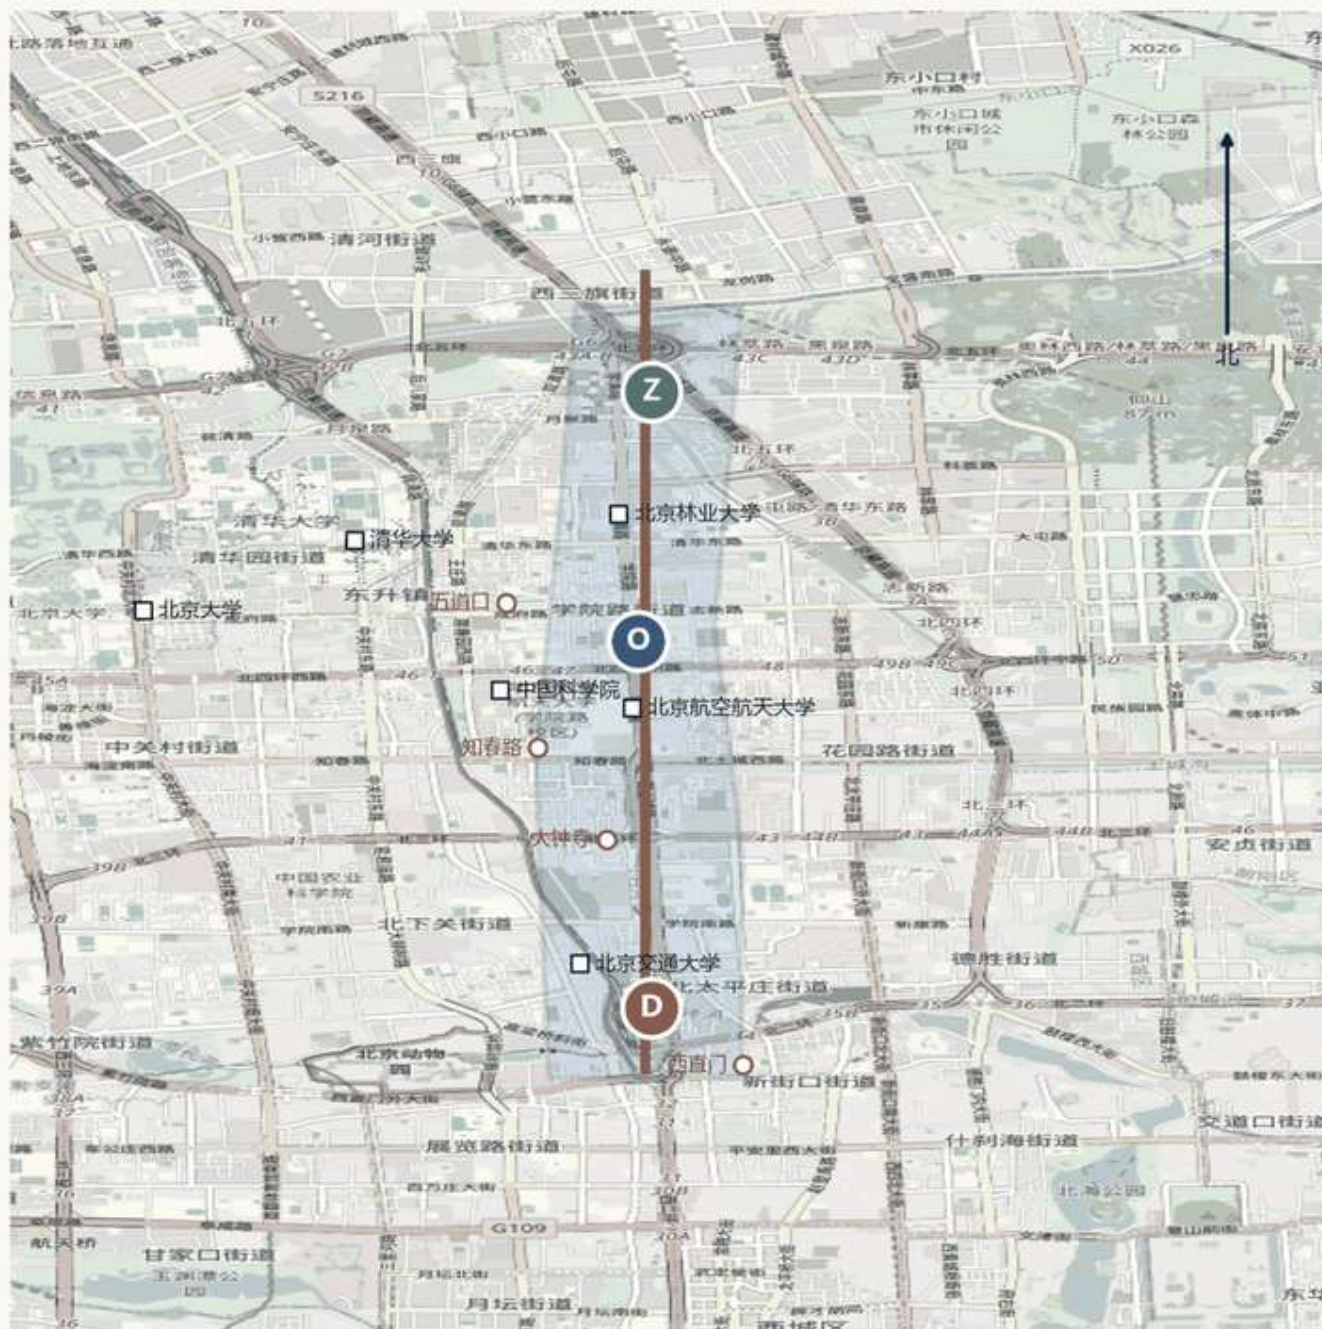

Official scope facts

Approx. 37 km² coordination area; about 9 km heritage corridor; 1–2 km urban interface.

Innovation density

Public sources identify 2,000+ AI enterprises and a dense university–research–enterprise talent network.

密集网络。

Public-realm base

Underground high-speed rail releases ground space for a north–south green and heritage corridor.

Planning response

Z: verification; O: incubation; D: first orders; west service wing and east testbed wing.

Legend: □ university/research ○ transit ● three cores □ Jingzhang axis

Base map © OpenStreetMap contributors, ODbL; anchors checked against official public sources; provisional constraint.

PROVISIONAL CONSTRAINT | CONCEPT PLAN | PROFESSIONAL VERIFICATION REQUIRE

MAP-A2

URBAN HEALTH CHECK: PROBLEMS REQUIRE EVIDENCE


Official text, public imagery and provisional geometry are graded separately; unknowns remain field tasks.



E0 官方现状证据 | 轨道13号线与京张高铁多次变化竖向关系

规划解读明确指出：纵横交错、堵点断点、横向道路复杂交点、权属主体多，需要分段实施。

E0 公开实施图：横向慢行补链

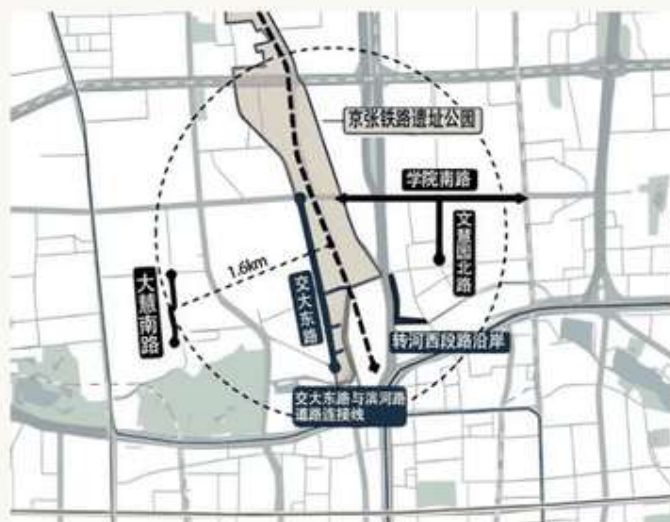

E0 公开产业图：原点社区密集锚点



- P1 Complex horizontal and vertical movement** E0
Official evidence: Line 13, cross streets, bottlenecks and breaks.
Action: surveyed node sections before dimensions.
- P2 Multiple rights and delivery actors** E0
Railway, universities, institutes, districts and communities.
Action: bind coordination, delivery, operation and acceptance.
- P3 One solution cannot fit all segments** E0
Official material confirms varied functions and demands.
Action: verification / incubation / conversion by segment.
- P4 No continuous three-core service chain** E1
Derived from separated provisional cores and distinct public functions.
Action: shared catalogue, first-order receipts and links.
- P5 Dense talent needs everyday support** E0
Public figures: 1,000+ scientists, 13k+ developers, 100k+ students, 400+ firms.
Action: affordable space, night community, family support.
- P6 Interface quality and actual demand** E3
No site photos, counts, accessibility audit or interviews yet.
Action: 24-hour observation, audit and stakeholder interviews.

E0 official/primary public | E1 derived | E3 field verification required. E3 cannot trigger construction investment.

Evidence: Beijing planning authority (2021); Haidian public sources; geometry/" .geojson; OSM location base.


PROVISIONAL CONSTRAINT | CONCEPT PLAN | PROFESSIONAL VERIFICATION REQUIRE

MAP-A4

VERTICAL RELATIONS AND NODE INVESTIGATION

Public sections prove rail relationships only; every stitch needs survey, clearance, drainage, egress and rights evidence.

E0 官方公开纵向关系 | 西直门—清河: 13号线地面 / 高架变化, 京张高铁入地

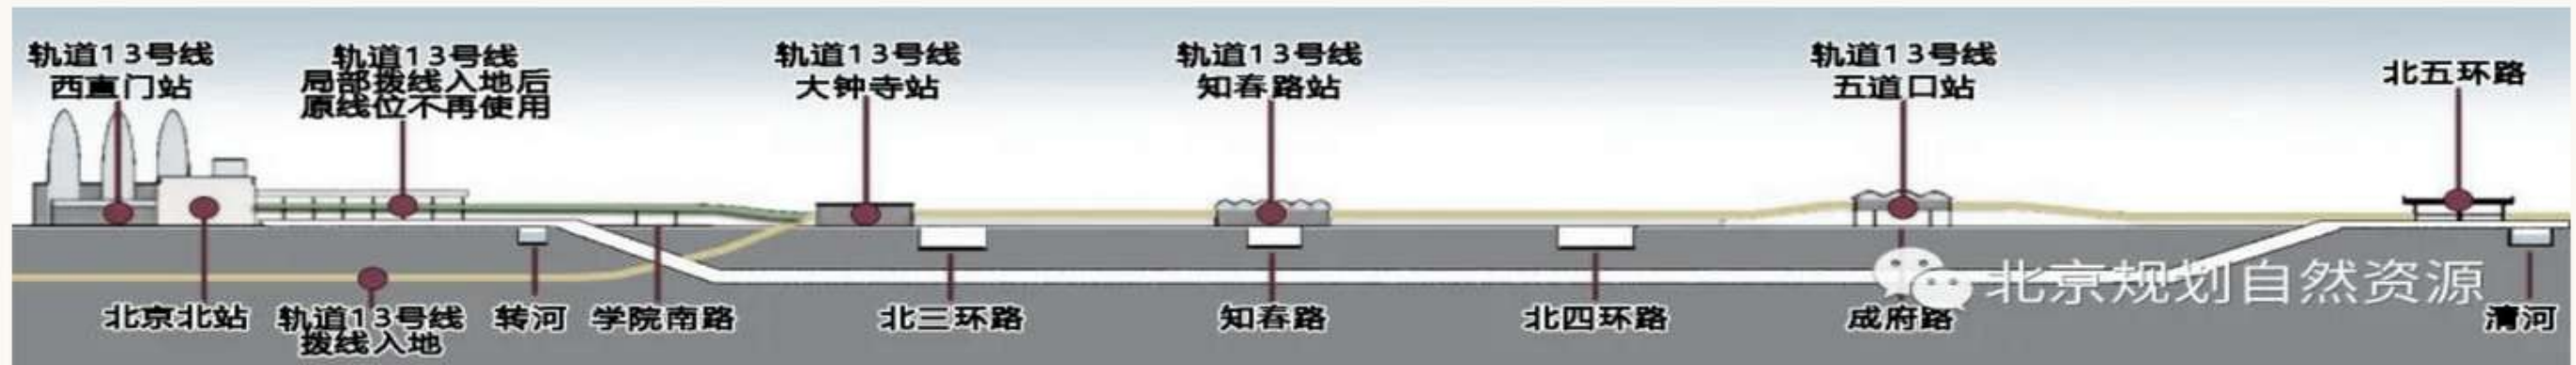

01 SURVEY + CONTROL

Rail, road, site, building and river control points; one coordinate and level datum.

02 CLEARANCE + STRUCTURE

Under-bridge, station and crossing clearance; grid, foundation, load and vibration sign-off.

03 ACCESSIBILITY

Cross-section, slope, turning, tactile route, crossing wait, conflict and detour.

04 UTILITIES + STORMWATER

Drainage, ponding, utilities, maintenance, sponge systems and river interface.

05 FIRE + EMERGENCY

Egress width, fire route, e-stop, takeover, rescue access and named duty holder.

06 RIGHTS + MAINTENANCE

Title, management line, opening hours, cleaning, lighting, repair and incident closure.

ENGINEERING GATE | Without named and traceable survey/sign-off records, all east-west links remain conceptual arrows: no width, level or budget.

Upper profile: Beijing planning authority (2021). Lower checklist: proposal task, not existing engineering dimensions.

PROVISIONAL CONSTRAINT | CONCEPT PLAN | PROFESSIONAL VERIFICATION REQUIRE

Dimension	Baseline required	Current diagnosis	Project trigger	Stop gate
HC-01 Structure and facility safety	Measured survey, structural appraisal, equipment loads, envelope and utility register	Current layers identify stock objects but do not prove safe equipment loads or public opening.	Triggers Z1, Z2 and the WP0 baseline package	No permanent works or equipment move-in without professional sign-off
HC-02 Fire and operational safety	Fire compartments, egress, water, electrical, hazardous use and event-capacity checks	Labs, night school, public opening and robotics overlap without an approved operating basis.	Triggers Z3, Z5, O3 and scenario safety protocols	No opening without egress, insurance, e-stop and named accountability
HC-03 Heritage and place value	Relic survey, age/value appraisal, view corridors, component and archive rights	The rail axis has strong narrative potential, while components, dates, display rights and grades remain unverified.	Triggers heritage axis, landmarks, wayfinding and annual curation	Survey before design; uncleared content stays off walls and digital channels
HC-04 Rights and governance conditions	Land/building rights, leases, permits, management limits, stakeholders and claims	Provisional polygons cannot replace rights or management limits; opening, maintenance and revenue duties are unsettled.	Triggers owner confirmation and the one-map/two-table/six-list package for all projects	No implementation-library entry without named coordinating, delivery, operating and accepting parties
HC-05 Industry-space fit	Enterprise lifecycle, spatial demand, equipment, service gaps, affordability and alternatives	Haidian has strong innovation sources but weak validation-incubation-first-order interfaces; office supply is not industry service.	Triggers Z1-Z4, O1-O3 and D1-D5	No construction investment without a problem owner, real users and operating brief
HC-06 Access and continuity	Transit exits, walking/cycling, crossings, accessibility, loading, emergency and time conflicts	The north-south spine has continuity potential; east-west links, portals, accessibility and test flows need field checks.	Triggers Z3, SCN-08, Xiaoyuehe wing and WP1 public base	Tests and events may not occupy anonymous passage, accessible or emergency routes
HC-07 Public realm, ecology and inclusion	Green-blue systems, comfort, stormwater, lighting, stay, all-age use, opening and maintenance survey	Public space can be innovation infrastructure, but comfort, inclusion, maintenance and tech opt-out lack baselines.	Triggers Z5, O4, O5, SCN-07-09 and the component library	Public service cannot depend on data consent; no facility expansion without maintenance funding

S | Strong innovation sources

Evidence | Universities, institutes, 2,000+ AI firms and Origin talent density.

Action | Connect shared facilities, project clinics and first-order entries instead of adding another generic park.

S | Linear public base

Evidence | Underground high-speed rail releases a continuous heritage corridor.

Action | Stack walking, ecology, heritage interpretation and open innovation scenes on the public axis.

W | Complex vertical and cross movement

Evidence | Line 13, cross streets, bottlenecks and breaks are officially documented.

Action | Start each node with survey, section and safety lists; concept lines do not replace engineering.

W | Multiple actors and rights

Evidence | Railway, universities, districts, parks and communities overlap.

Action | Each project names coordination, delivery, operation and acceptance responsibilities.

O | Campus–park–neighbourhood integration

Evidence | Policy supports affordable and open innovation space.

Action | Origin incubates, Zhongzhiyuan verifies, Dazhongsi converts first orders.

T | Event-led displacement

Evidence | Talks, roadshows and cafés can create footfall without projects.

Action | Every event must return a project, test, first-order or resident-service receipt.

DIA-01 JINGZHANG GROWTH MESH: ORIGINAL PRODUCTION LOGIC + REGIONAL INTERFACES


Anchors are inputs: district interfaces convert resources into projects, firms and public value

PROVISIONAL
 CONCEPT

01 | RESOURCE ANCHORS



02 | THE DISTRICT AS INCUBATOR: ONE AXIS, THREE CORES, TWO WINGS

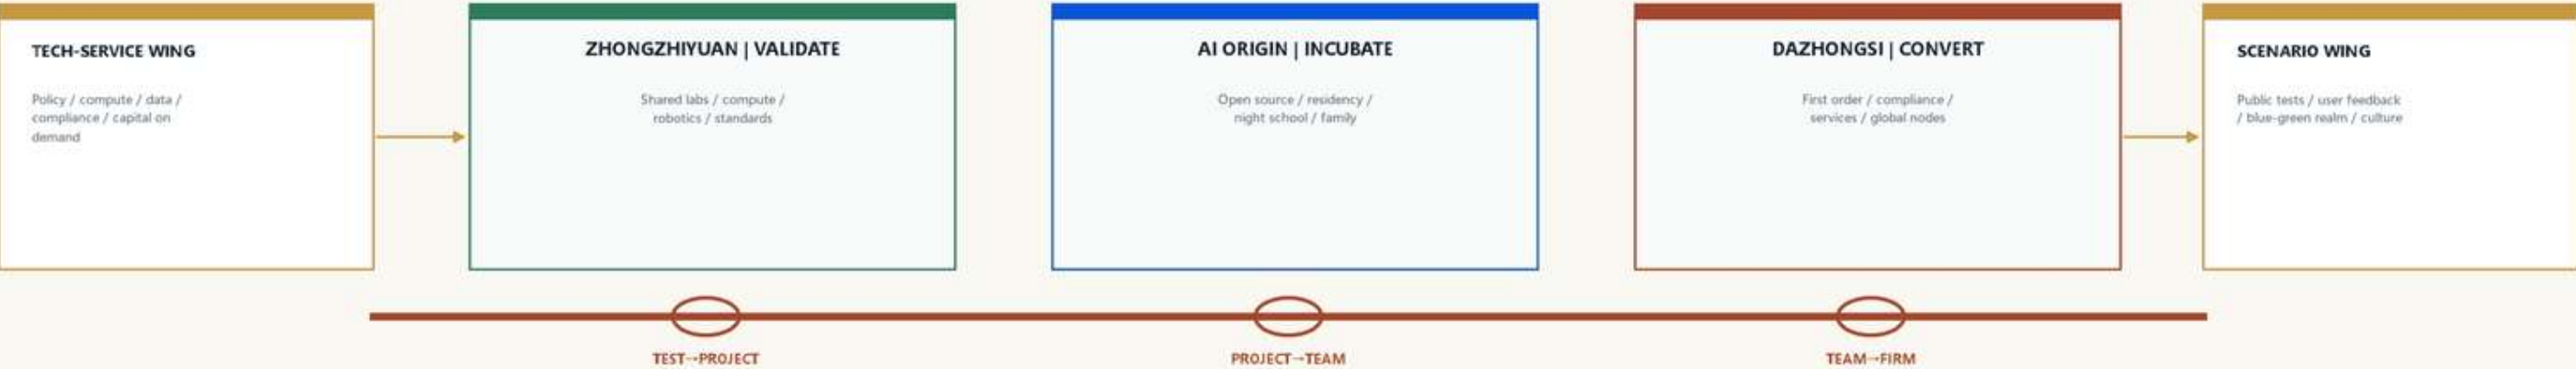

03 | SEVEN-GATE EVIDENCE-BASED GROWTH CHAIN



04 | ALL REGIONAL INTERFACES ARE PROPOSALS PENDING VERIFICATION



THREE TRACEABLE BUSES

RESOURCE: CATALOGUE + BOOKING

EVIDENCE: VERSION / ACCEPTANCE / AUDIT

PUBLIC VALUE: COMPLAINT / INCLUSION / EXIT

Originality boundary: the three-core division + seven evidence gates + public-value return is this proposal's combination; cases are mechanism references only.
 Solid = package mechanism; dashed = proposed regional interface. Any partnership name requires written confirmation.

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG: Original ecosystem production mesh

NO: DIA-01 · 2026-08-10 · EN

SCALE: NTS


DATA: CONCEPT

dinglc2001 · Completed using Agent

MAP-A3

MASTER PLAN: ONE AXIS, THREE CORES, TWO WINGS, 15 PROJECTS

The heritage axis supports walking, ecology and memory; the cores form verification-incubation-first-order conversion.

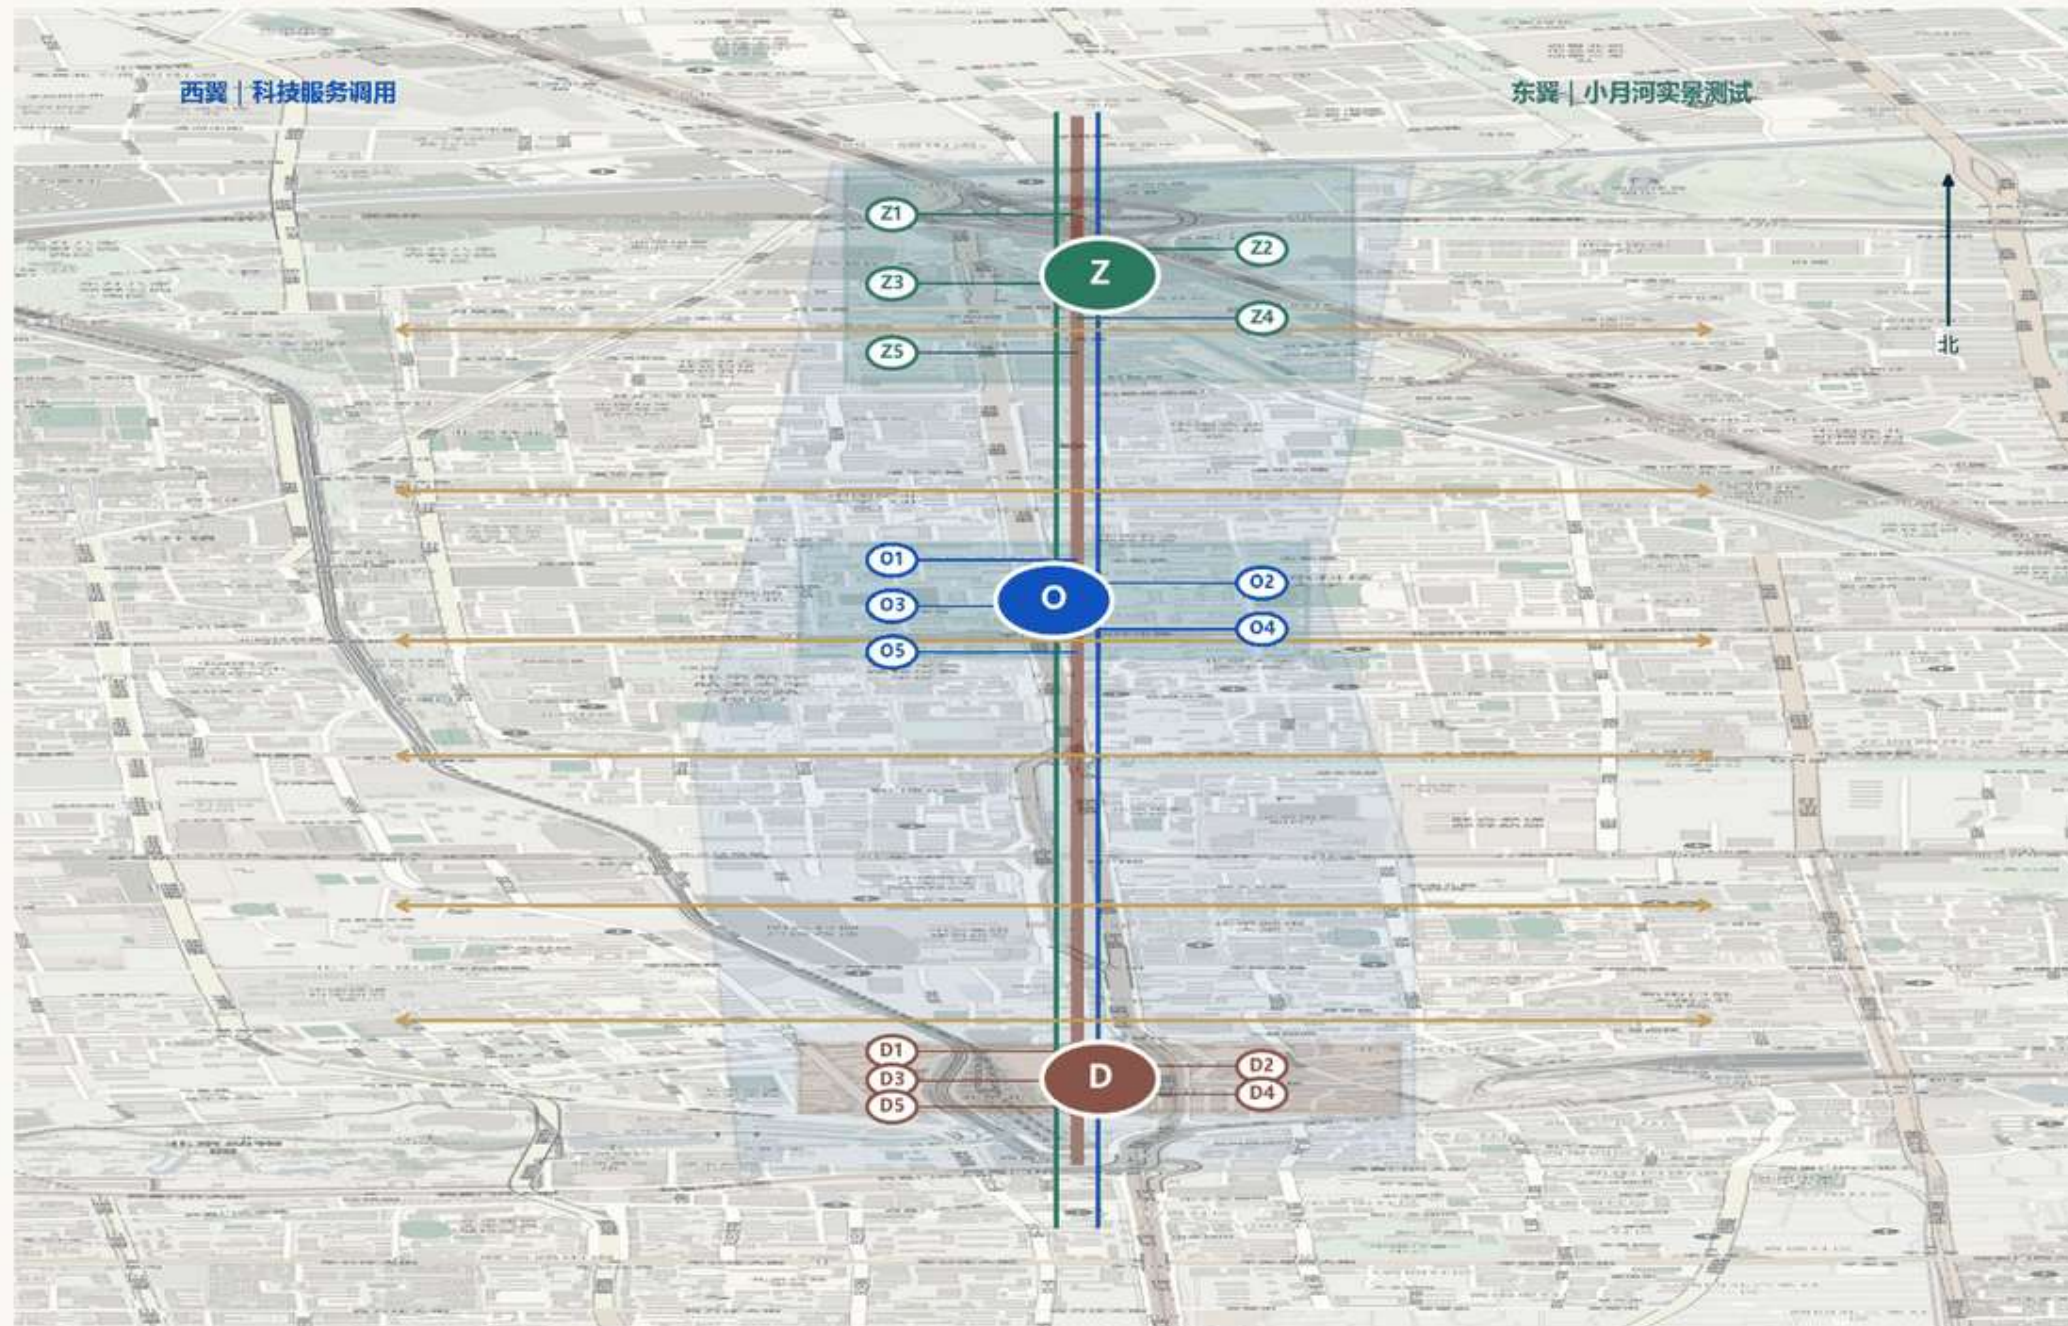**Z | Trusted verification**

Z1 shared lab; Z2 domestic compute adaptation; Z3 robot test ring; Z4 standards; Z5 public interface.

佳共创; Z5科普

O | Community incubation

O1 open-source lounge; O2 founder residence; O3 night school; O4 family support; O5 co-creation hall.

寺; O5原点共创

D | First-order conversion

D1 scenario orders; D2 enterprise hall; D3 compliance clinic; D4 capital demo; D5 developer exchange.

全球开发者交接

Six east-west stitches

Prioritise transit, universities, parks, communities and river; dimensions await survey.

勾待测绘。

Three nested scopes

37 km² coordination fact → provisional design area → three focus areas.

圈。

Derived from the official three-zone/two-wing brief and provisional GeoJSON; not statutory planning or title boundary.

PROVISIONAL CONSTRAINT | CONCEPT PLAN | PROFESSIONAL VERIFICATION REQUIRE

CORE-02

INDUSTRY SPACE, SEVEN-GATE GROWTH CHAIN + MIXED USE


Not land-use coloring: each product binds service, evidence, owner and exit

DATA-DERIVED

CONCEPT

PENDING VERIFICATION

A | OVERALL LAND USE + TIME-SHARED MIX

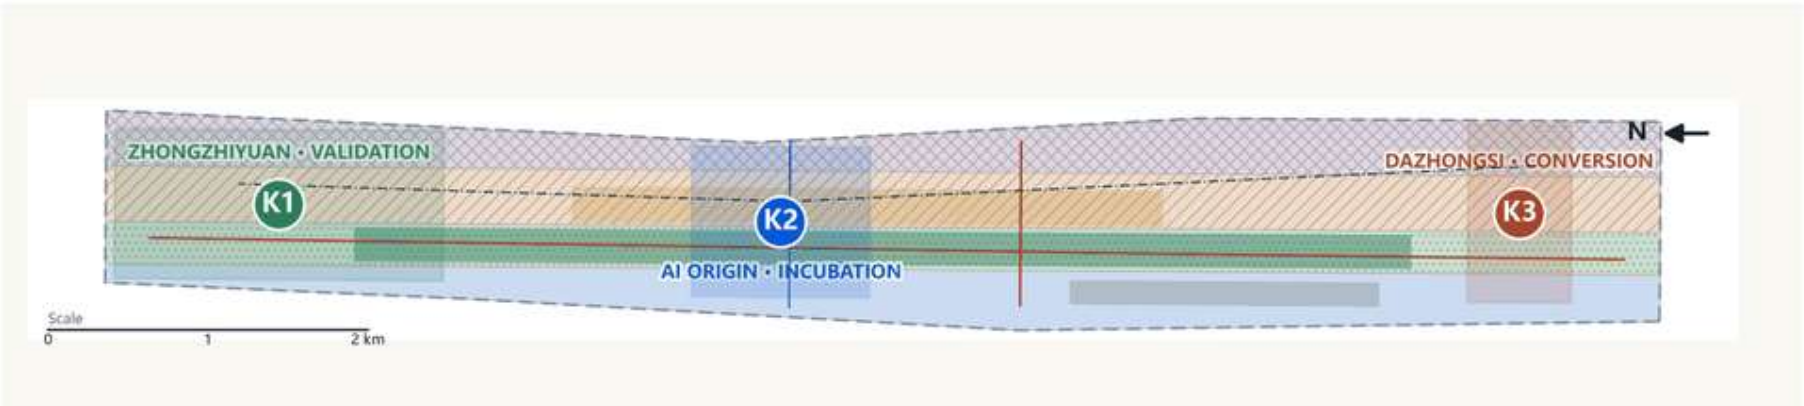

B | HOW RESOURCES BECOME FIRMS



C | FOUR DIMENSIONS × FIVE SPATIAL CARRIERS × THREE OPERATING PERIODS



Land-use classes are conceptual, not statutory controls; all products require rights, structure, fire, accessibility and operating-baseline verification.


CORE-02 | PROVISIONAL / CONCEPT / NTS | dingle2001 • COMPLETED USING AGENT

MAP-05

MOBILITY & SLOW-MOVEMENT SYSTEM

Transit portals · road hierarchy · walking & cycling · 15-min links (concept)

PROVISIONAL CONCEPT DATA-DERIVED

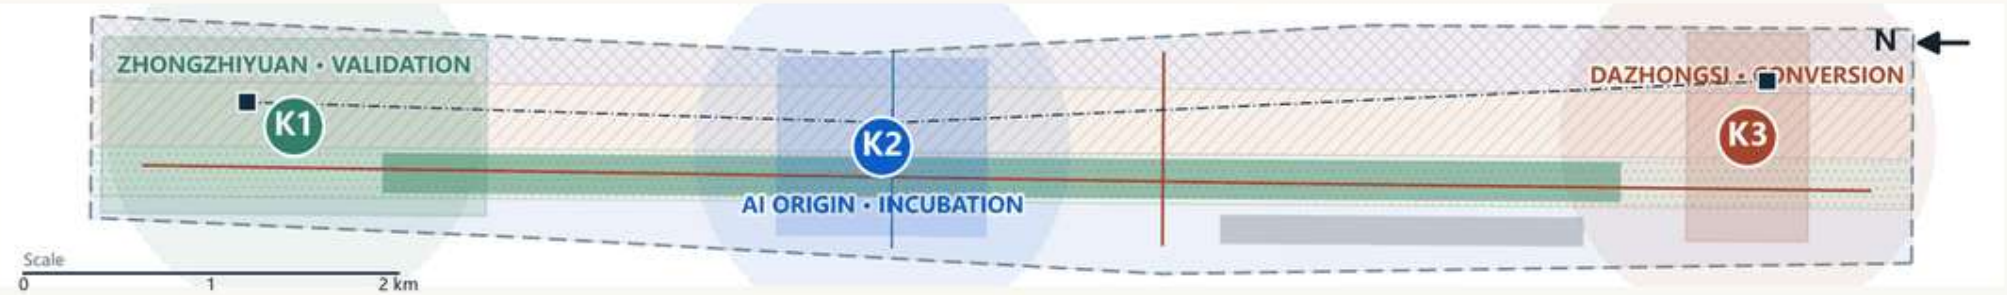

LEGEND

- Heritage slow spine (pedestrian-first)
- Tech-service wing (cycling)
- Scenario wing (slow)
- Transit portal link (concept)
- Transit portal node (concept)
- 15-min walking circle (concept, r=1km)


PRINCIPLES

- Anonymous passage; continuous accessibility
- Servicing separated from slow traffic (pending)
- Transit portal = first-order conversion entry
- No invented road redlines or traffic approvals

KEY AREAS

- K1 ZHONGZHIYUAN · VALIDATION
- K2 AI ORIGIN · INCUBATION
- K3 DAZHONGSI · CONVERSION

System layers (same geographic frame)

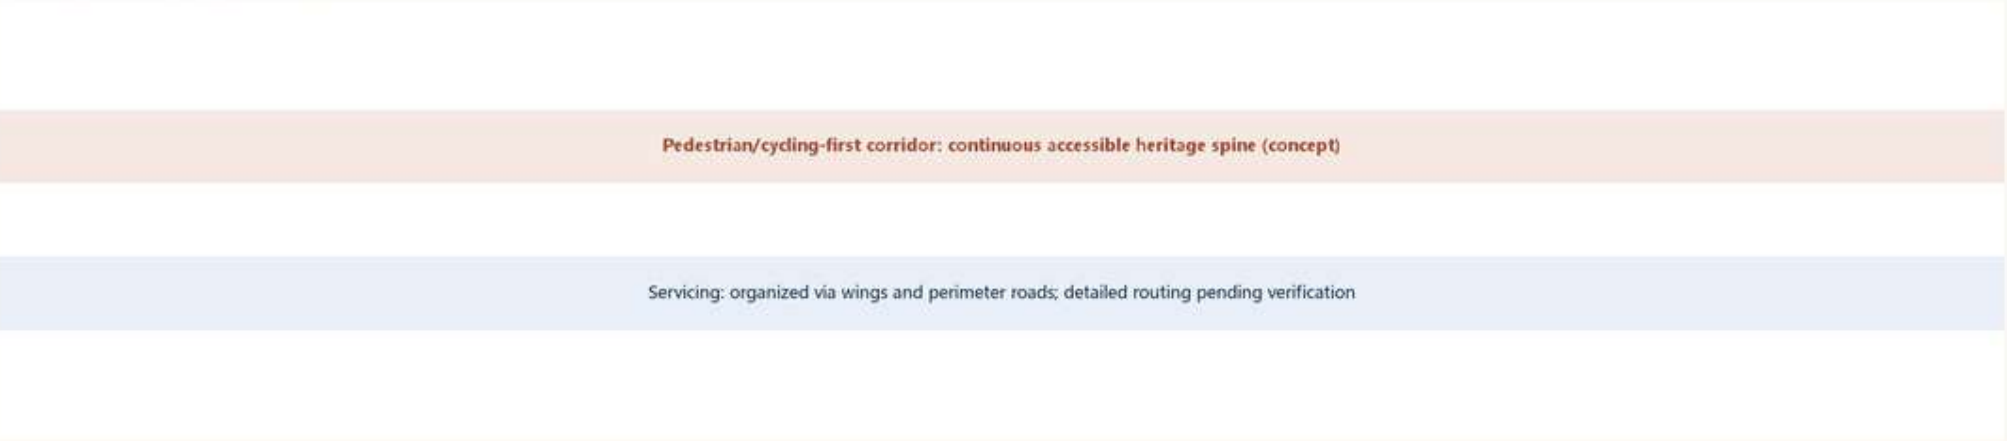

Provisional constraint only; not a statutory boundary, approval or area basis
Source: official package geometry/*_geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	Mobility & slow-movement system
NO	MAP-05 - 2026-08-10 - EN
SCALE	main map approx. 1:25000
DATA	DATA-DERIVED + CONCEPT
dingjie2001	Completed using Agent

CORE-04

MOBILITY-BLUE/GREEN, 12 SCENARIOS + 7-PERSONA JOURNEYS

Every scenario binds space, operator, data class, human release, failure exit and public value


DATA-DERIVED

CONCEPT

PENDING VERIFICATION

A

HERITAGE SPINE, BLUE-GREEN REALM + 12 SCENARIO NODES

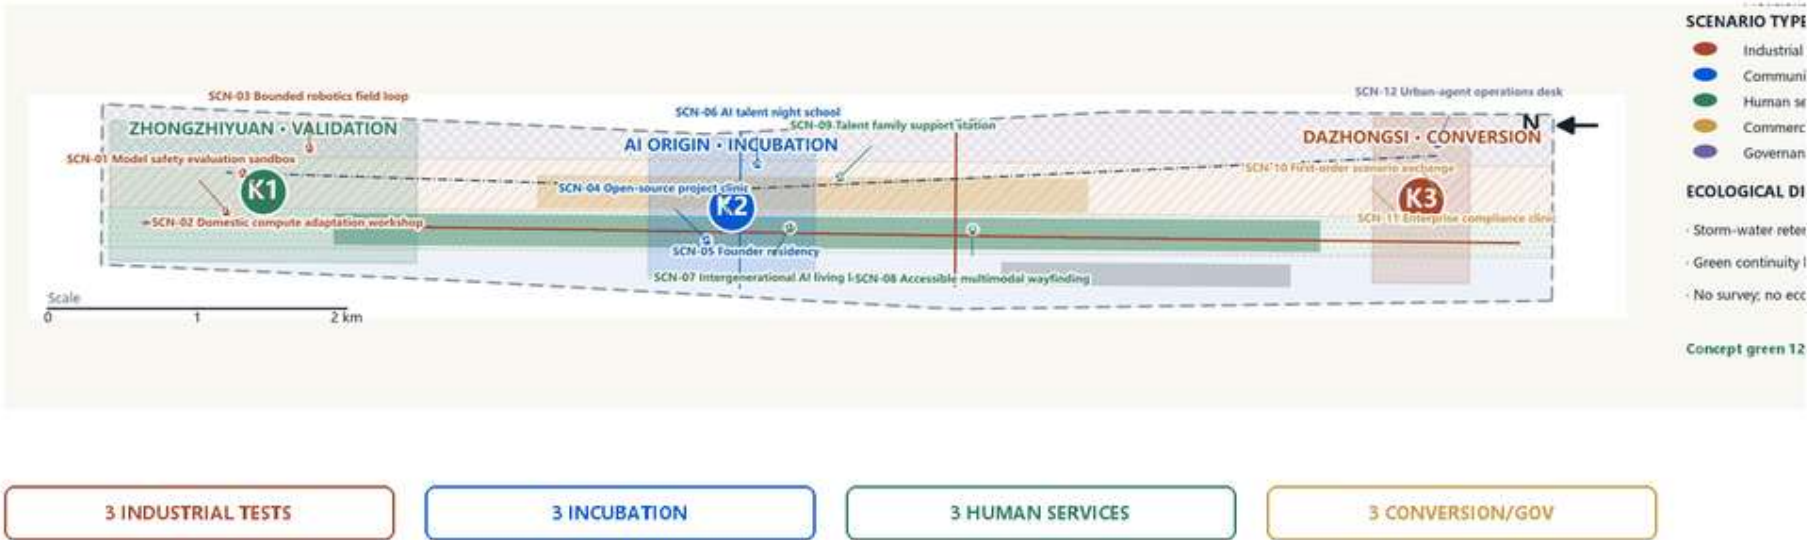

B

FOUR SCENARIO FAMILIES + RISK GATES

INDUSTRIAL TESTS SCN-01-03

D2/D3 | safety sign-off + e-stop

INCUBATION SCN-04-06

D0/D1 | license review + human clinic

HUMAN SERVICES SCN-07-09

Minimum collection | independent exit

CONVERSION/GOV SCN-10-12

Read-only default | compliance + appeal

Triggers: privilege breach / drift / takeover failure / complaint cluster → downgrade, pause or exit

C

7 PERSONAS: ENTER-CO-CREATE-TEST-CONVERT-FEEDBACK

	DISCOVER	ENTER	CO-CREATE	TEST	FIRST ORDER	GROW	FEEDBACK
RESEARCHER							
INDEPENDENT DEV							
STARTUP TEAM							
GROWTH FIRM							
SERVICE / INVESTOR							
RESIDENT FAMILY							
OPERATOR / GOVERNANCE							

Common breaks: unclear entry / unsafe night route / care conflict / no exit after failed test

D

PUBLIC-VALUE RELEASE GATES

ACCESS

Professional check before opening

CO-GOV

Proposed ≥2 resident seats

AFFORDABLE

Proposed ≥20% free/low-cost hours

APPEAL

Proposed 2-day ack / 10-day closure

EXIT

Independent exit for vulnerable users


Scenarios are bounded tests or operating proposals, not proof of maturity, approval or permission to collect personal data; named humans release high-risk actions.

CORE-04 | PROVISIONAL / CONCEPT / NTS | dingle2001 • COMPLETED USING AGENT

MAP-07 RENEWAL STRATEGY: FOUR READING LAYERS

Known · retain · renew & add · pending verification

PROVISIONAL PENDING VERIFICATION CONCEPT

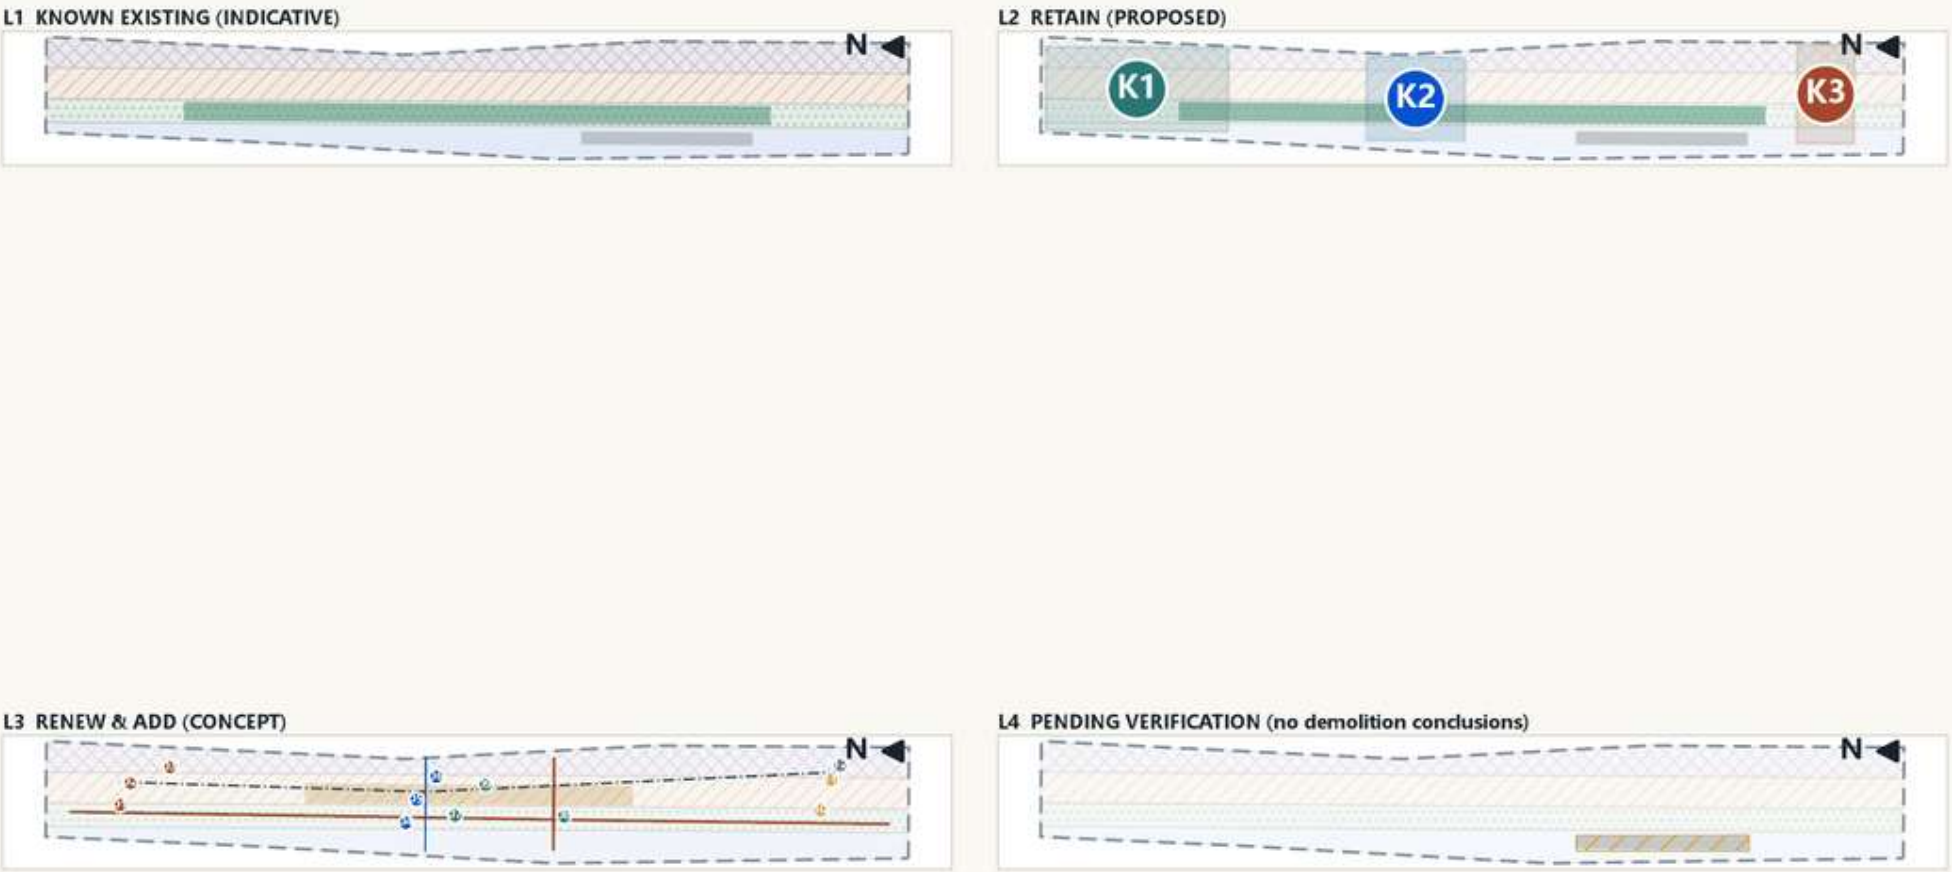

- L1 Existing layers are indicative concept layers, unsurveyed.
- L2 Retain: three cores and the blue-green armature as renewal base.
- L3 Renew & add: scenario insertion, public interfaces and slow links.
- L4 Pending: property, structure, fire and demolition — no conclusions.

PRINCIPLE

Reversible works first; no demolition layer without reliable evidence.

KEY AREAS

- K1 ZHONGZHIYUAN · VALIDATION
- K2 AI ORIGIN · INCUBATION
- K3 DAZHONGSI · CONVERSION

Provisional constraint only; not a statutory boundary, approval or area basis
Source: official package geometry/* geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG	Renewal strategy: four layers
NO	MAP-07 - 2026-08-10 - EN
SCALE	small multiples NTS
DATA	CONCEPT / PENDING
dingjie2001	Completed using Agent

MAP-08

PHASING & PROJECT PLACEMENT

0-1y rules & pilots · 1-3y reversible works · 3-5y replication

PROVISIONAL CONCEPT DATA-DERIVED



0-1 YR

Rules & pilots: catalogues, problem list, clinics, three bounded tests

1-3 YR

Reversible works & service streets on pilot evidence

3-5 YR

Replication, global events & long-term assets; stage gates

Note: only the phase-1 extent is in the package; phases 2-3 are expressed conceptually at core granularity.

KEY AREAS

K1 ZHONGZHIYUAN - VALIDATION

K2 AI ORIGIN - INCUBATION

K3 DAZHONGSI - CONVERSION


Fifteen-project dependency (grouped)



Dependency: rules first → pilot evidence → reversible works → services & capital

Provisional constraint only; not a statutory boundary, approval or area basis
Source: official package geometry/*.geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	Phasing & project placement
NO	MAP-08 - 2026-08-10 - EN
SCALE	main map approx. 1:25000
DATA	DATA-DERIVED + CONCEPT
dinglc2001	Completed using Agent

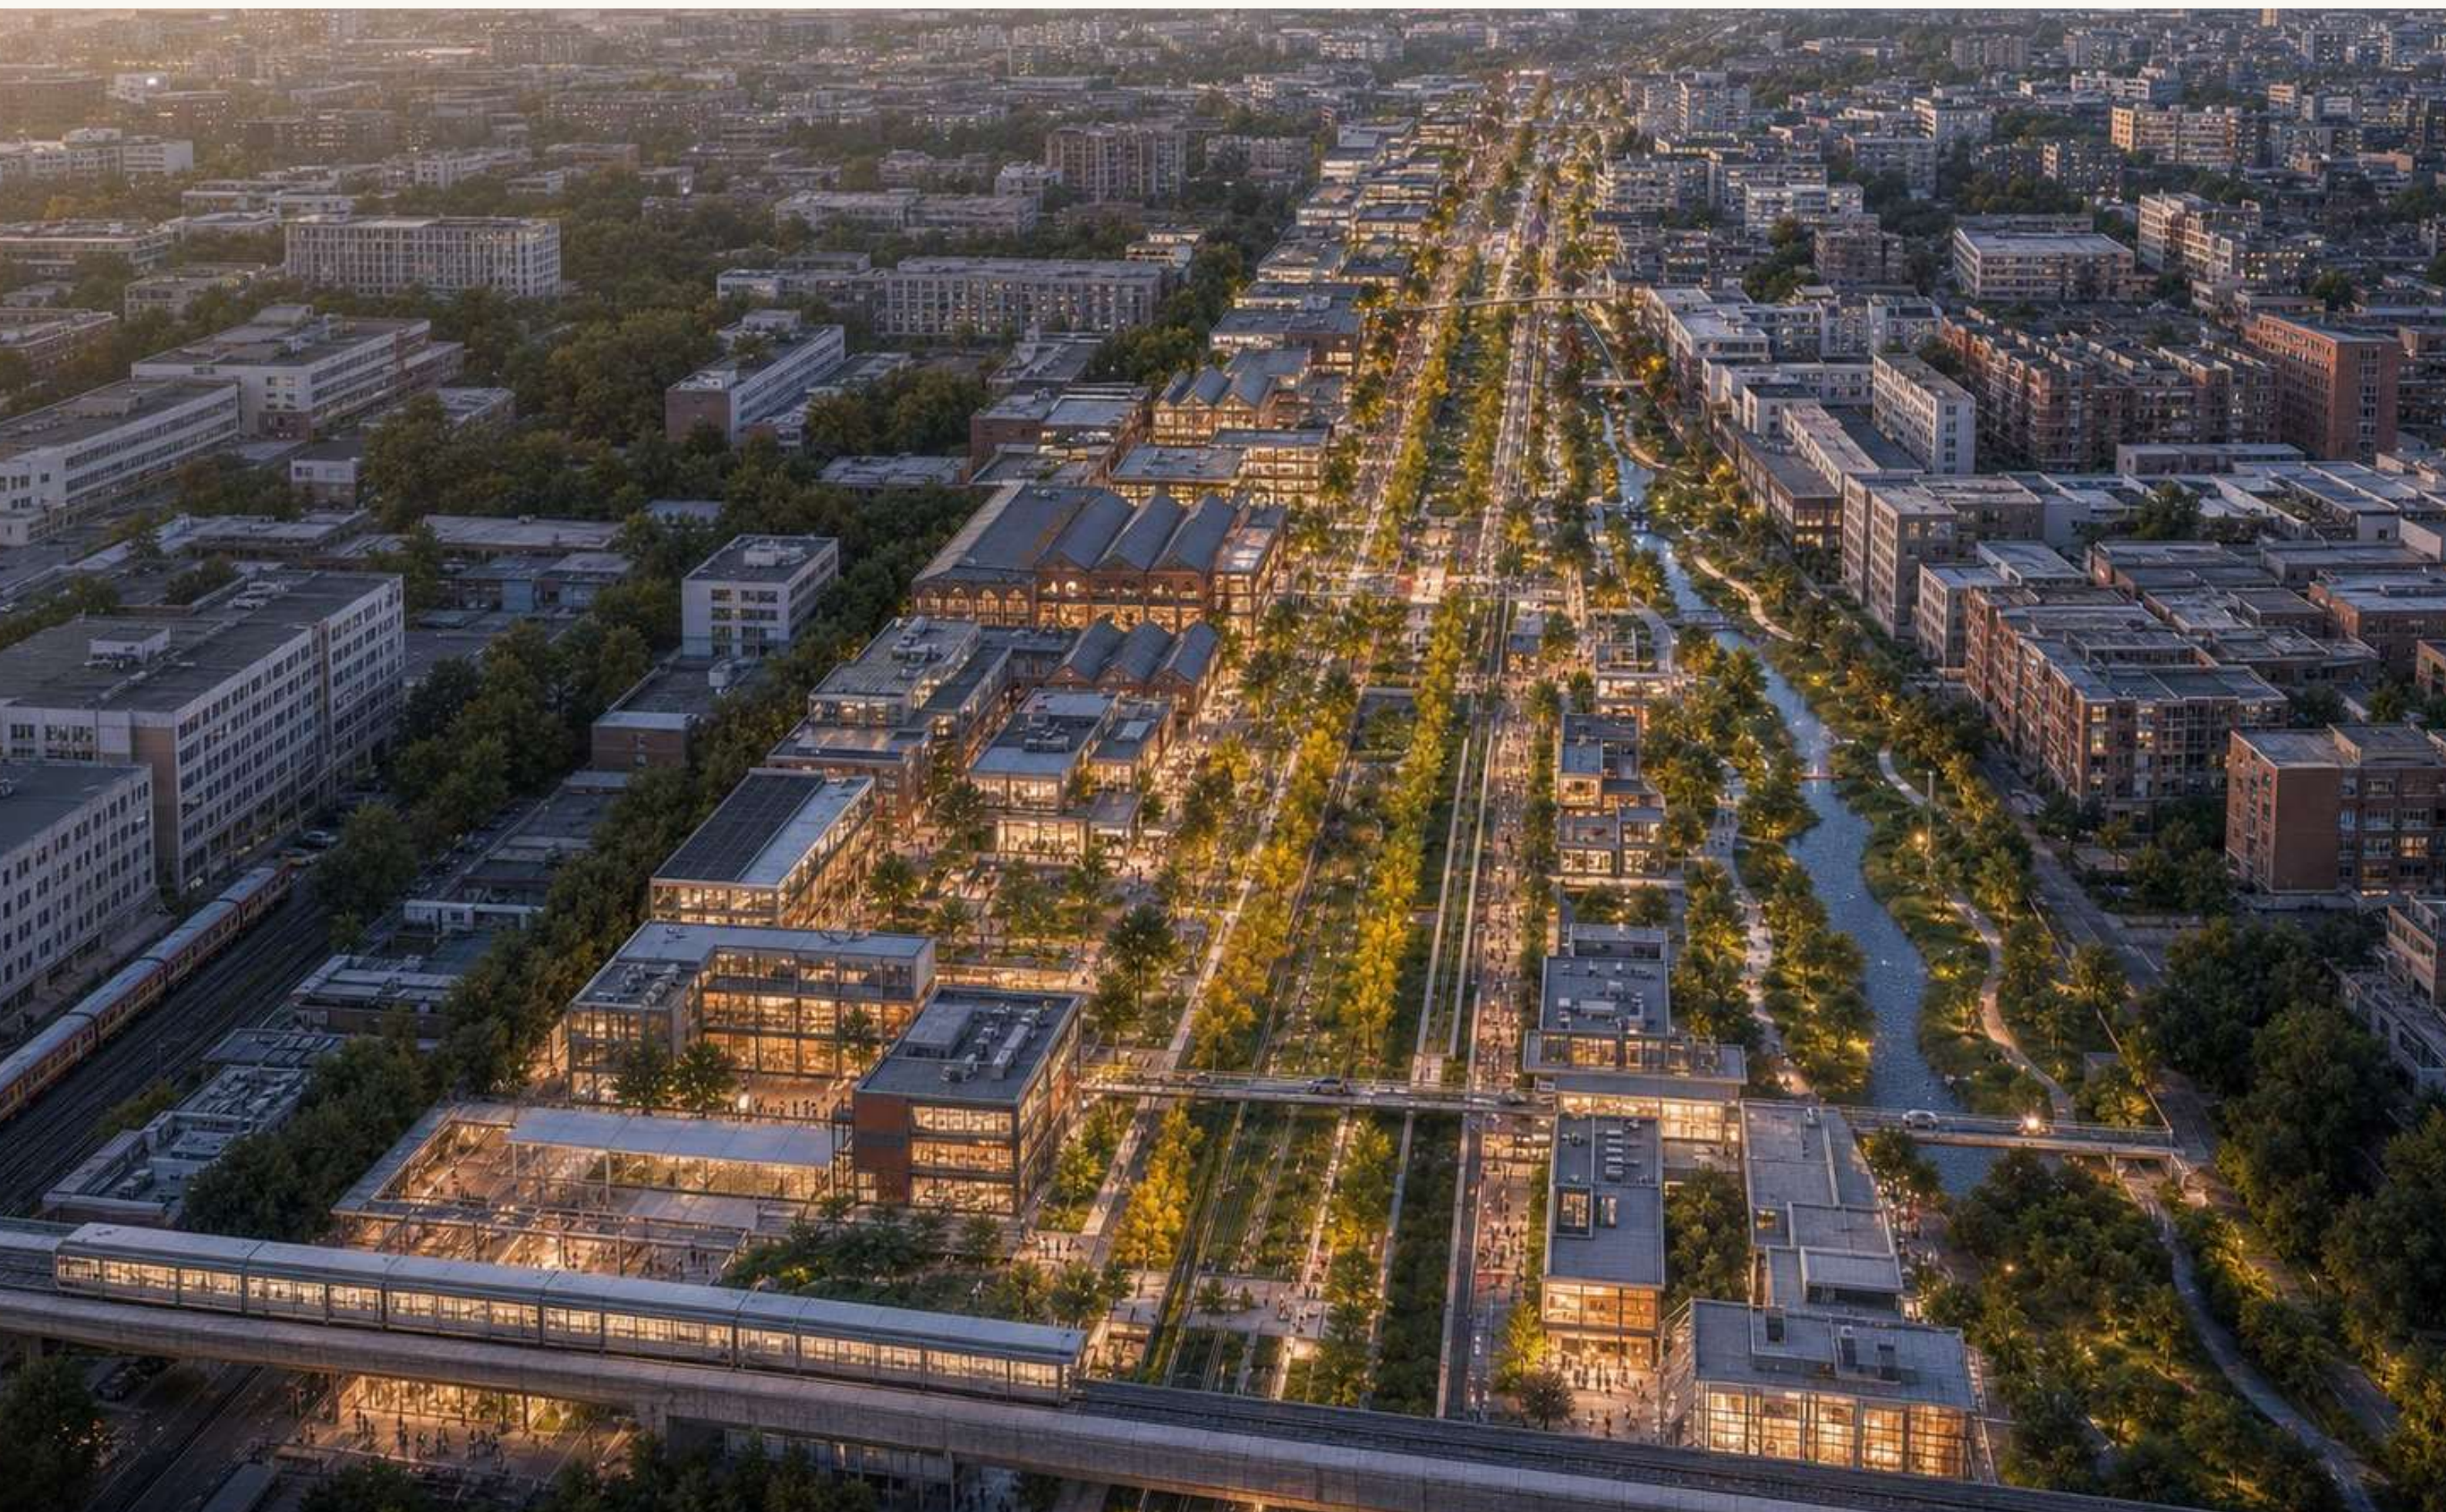

AI-generated concept view; buildings, water, tracks and interfaces are not existing-condition, planning, engineering or investment evidence.

Turn high-threshold validation into a bookable, signable and stoppable public technical base.




- Users | researchers, developers and growth firms
- Products | lab, adaptation workshop, bounded test loop, standards room and public gallery
- Gates | structure, fire, load, insurance, e-stop and named test operator

AI-generated concept view. It does not prove buildings, boundaries, quantities, approvals or investment.

K1-PLN ZHONGZHIYUAN • SHARED VALIDATION CITY | CONCEPT PLAN

Concept placement · NTS · pending verification

PENDING VERIFICATION PROVISIONAL NTS CONCEPT

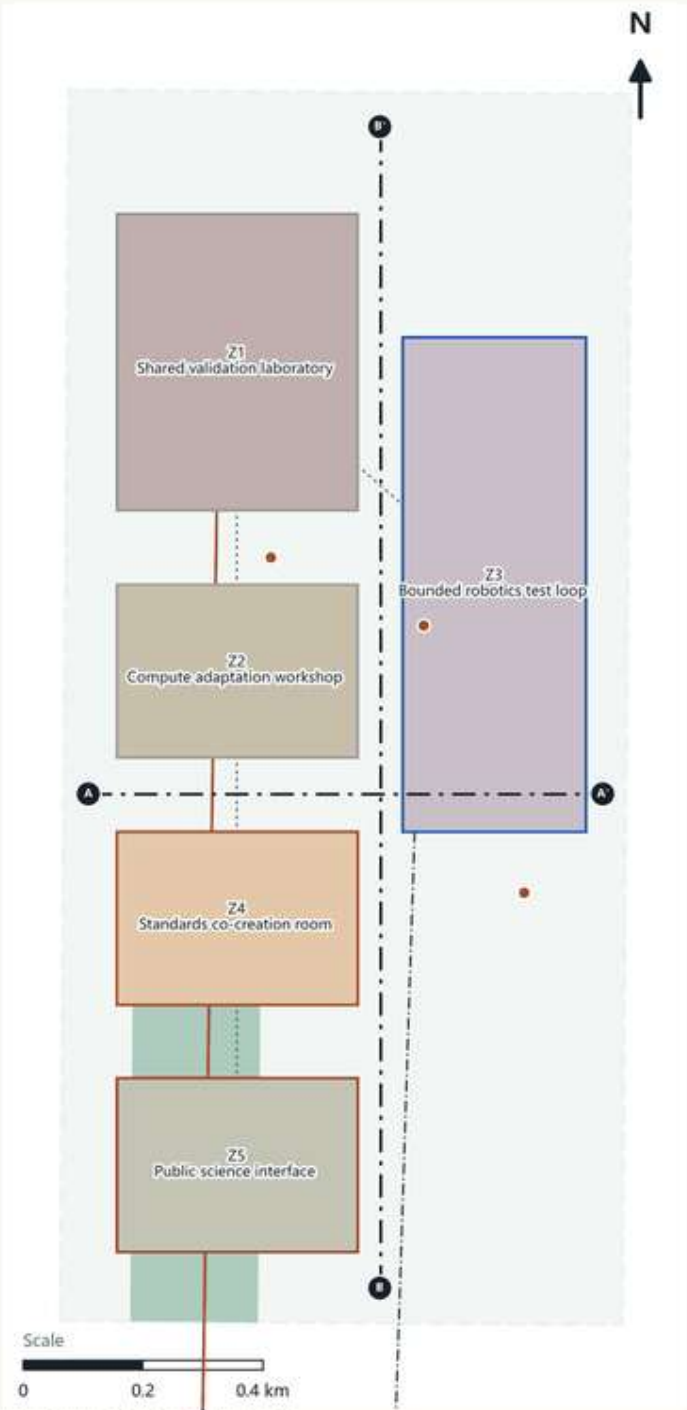

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/* geojson and metric json (recomputed in EPSG:4548)
Serving along the perimeter (concept, pending verification)



SPATIAL PRODUCT LOGIC

Public science → bookable co-creation → controlled testing

FUNCTION PLACEMENT (= PROJECTS)

- Z5 Public science interface
- Z4 Standards co-creation room
- Z2 Compute adaptation workshop
- Z1 Shared validation laboratory
- Z3 Bounded robotics test loop

LEGEND

- Provisional constraint · key area (rough)
- Existing (indicative)
- Proposed renewal
- Concept addition
- Heritage slow spine
- Section lines A—A'/B—B'
- Scenario nodes (concept; type colors per MAP-06)

KEY DESIGN MOVES

- Science edge along the street
- Tiered-access labs
- Bounded robotics loop
- Externalized logistics

PENDING VERIFICATION

A—A' Equipment loads, fire separation and test safety boundary pending verification

B—B' Servicing/slow-traffic conflicts and noise pending verification


General: no survey/property/regulatory data; blocks are conceptual placement only.

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	ZHONGZHIYUAN • SHARED VALIDATION CITY concept plan
NO	K1-PLN · 2026-08-10 · EN
SCALE	NTS
DATA	CONCEPT / PENDING
dinglc2001	Completed using Agent

K1-FLO ZHONGZHIYUAN • SHARED VALIDATION CITY | GROUND-FLOOR INTERFACE & FLOWS

People · service · test flows · safety boundary (concept)

PENDING VERIFICATION NTS CONCEPT

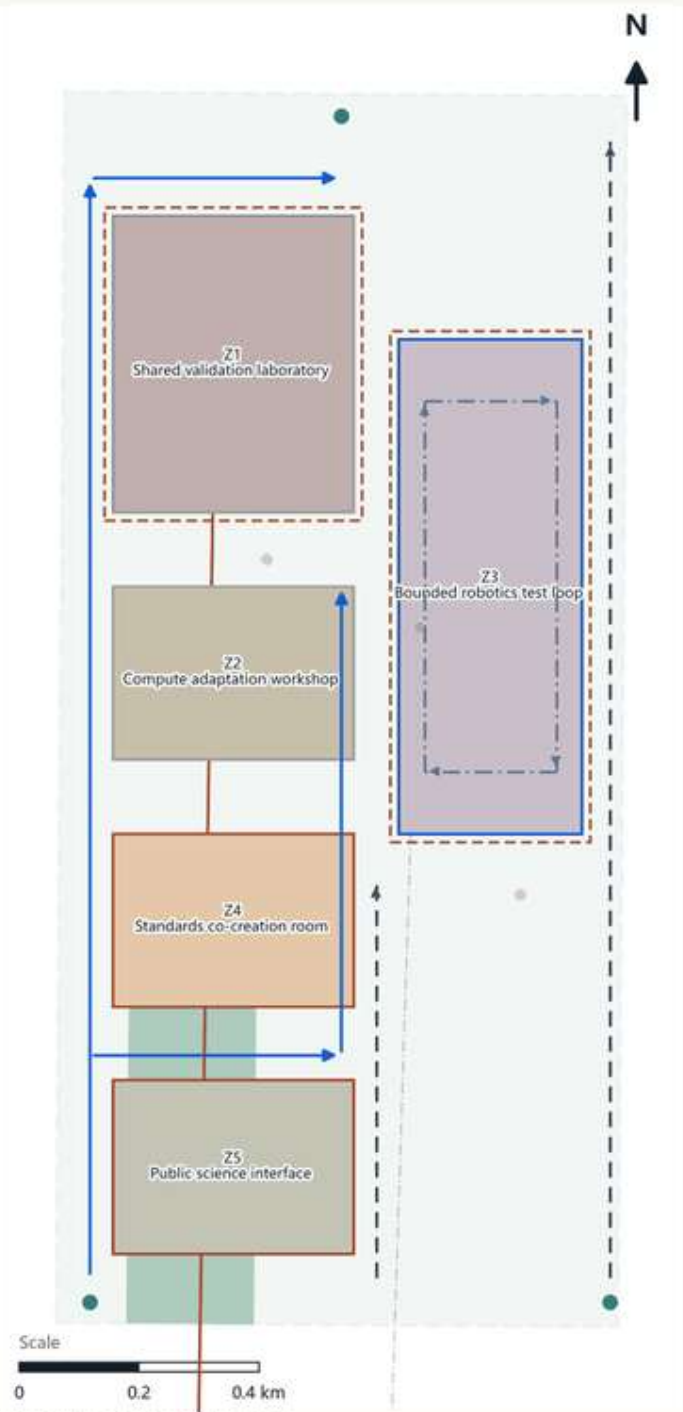

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)



- LEGEND**
- Pedestrian flow (concept)
 - Service/logistics flow (concept)
 - Test flow (bounded robotics loop)
 - Controlled-zone safety boundary
 - Main entries (concept)
 - Heritage slow spine
- GROUND-FLOOR PRINCIPLES**
- Ground floor: science edge & co-creation open/bookable
 - Controlled: tiered, logged lab/loop access
 - Logistics separated from test flows
- Safety: bounded time/speed/area, remote takeover, human release, incident review

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	ZHONGZHIYUAN • SHARED VALIDATION CITY flows
NO	K1-FLO - 2026-08-10 - EN
SCALE	NTS
DATA	CONCEPT / PENDING
dingic2001 • Completed using Agent	

K1-SEC



ZHONGZHIYUAN • SHARED VALIDATION CITY | SECTION SET

Concept sections • NTS • pending verification

PENDING VERIFICATION

NTS

CONCEPT

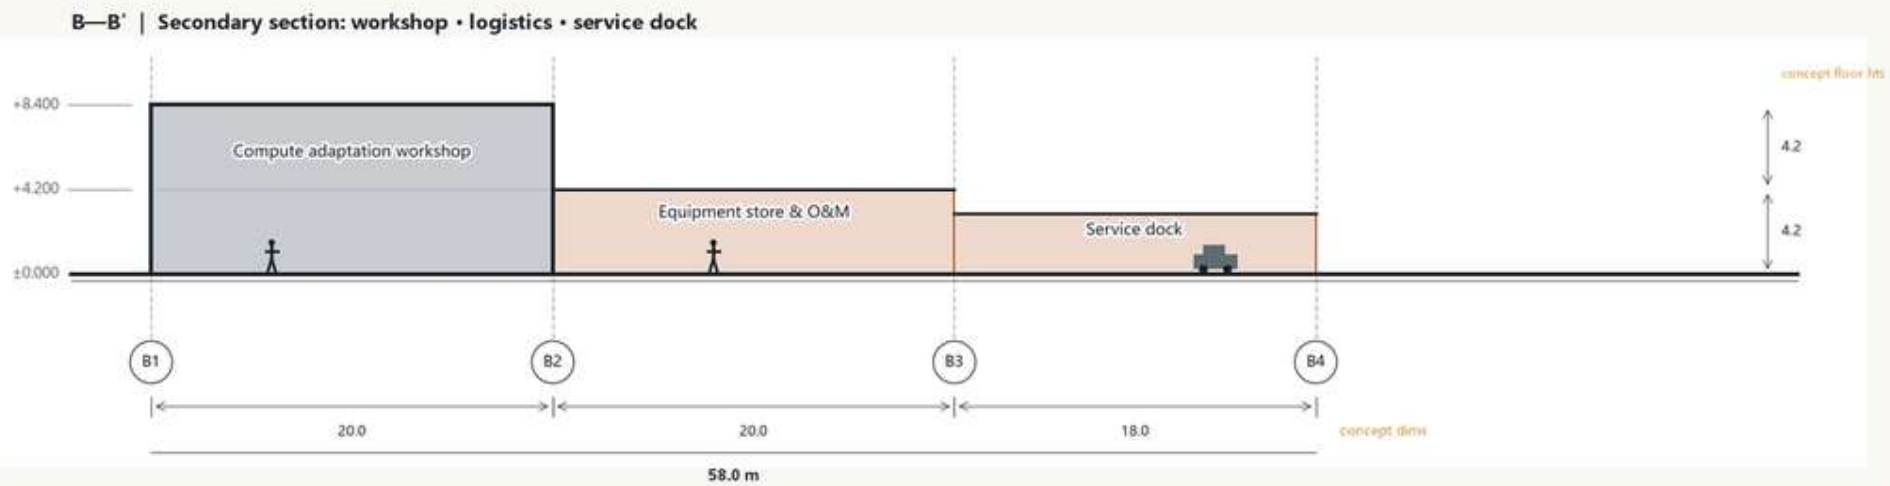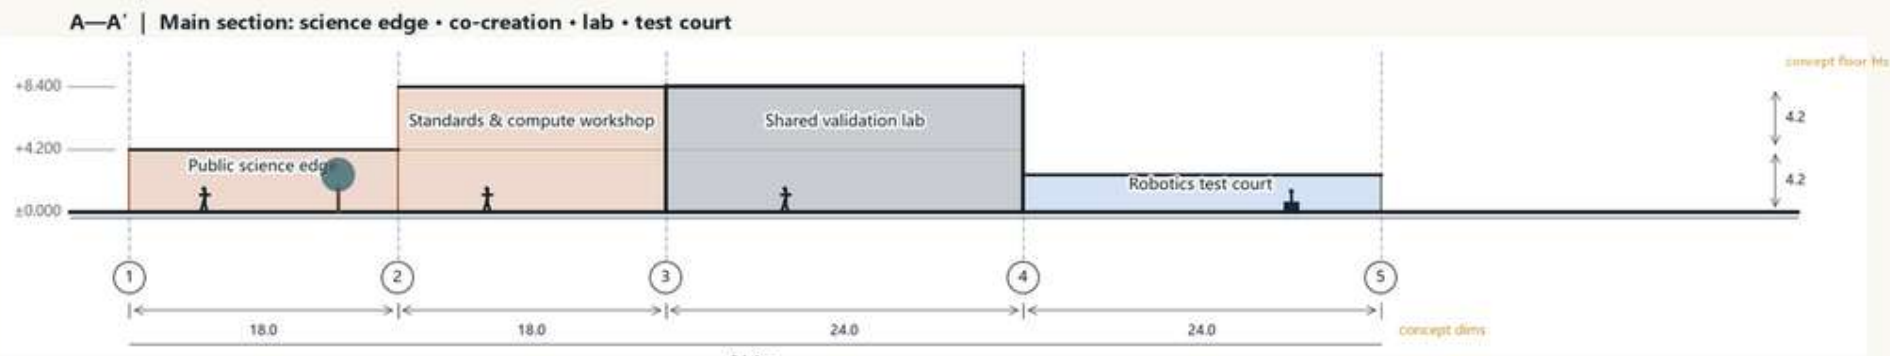

LEGEND

- Existing (indicative)
- Proposed renewal
- Concept addition
- Public
- Bookable shared
- Controlled
- Service/logistics
- Cut outline (L1)
- Projected outline (L3)
- Grid (L5)

Scale figure: person ≈1.7 m

OPENNESS GRADIENT

Public science → bookable co-creation → controlled testing

SECTION INDEX

Cut lines A—A' / B—B' are indexed on the concept plan (K1-PLN)

PENDING VERIFICATION

A—A' Equipment loads, fire separation and test safety boundary pending verification

B—B' Servicing/slow-traffic conflicts and noise pending verification

General: structure, fire, MEP, utilities, cost and survey all pending;

Conceptual indicative dimensions; pending survey and professional verification

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	ZHONGZHIYUAN • SHARED VALIDATION CITY sections
NO	K1-SEC • 2026-08-10 • EN
SCALE	NTS
DATA	CONCEPT / PENDING
dinglc2001	Completed using Agent

Use open-source collaboration, founder residence, night school and family support to lower everyday formation costs.



- Users | independent developers, startups, families and residents
- Products | open-source lounge, residence, night school, family support and living lab
- Gates | lawful use, fire, fair selection, public hours, offline equivalent and exit

AI-generated concept view. It does not prove buildings, boundaries, quantities, approvals or investment.

K2-PLN

AI ORIGIN • TALENT COMMUNITY | CONCEPT PLAN


Concept placement · NTS · pending verification

PENDING VERIFICATION

PROVISIONAL

NTS

CONCEPT

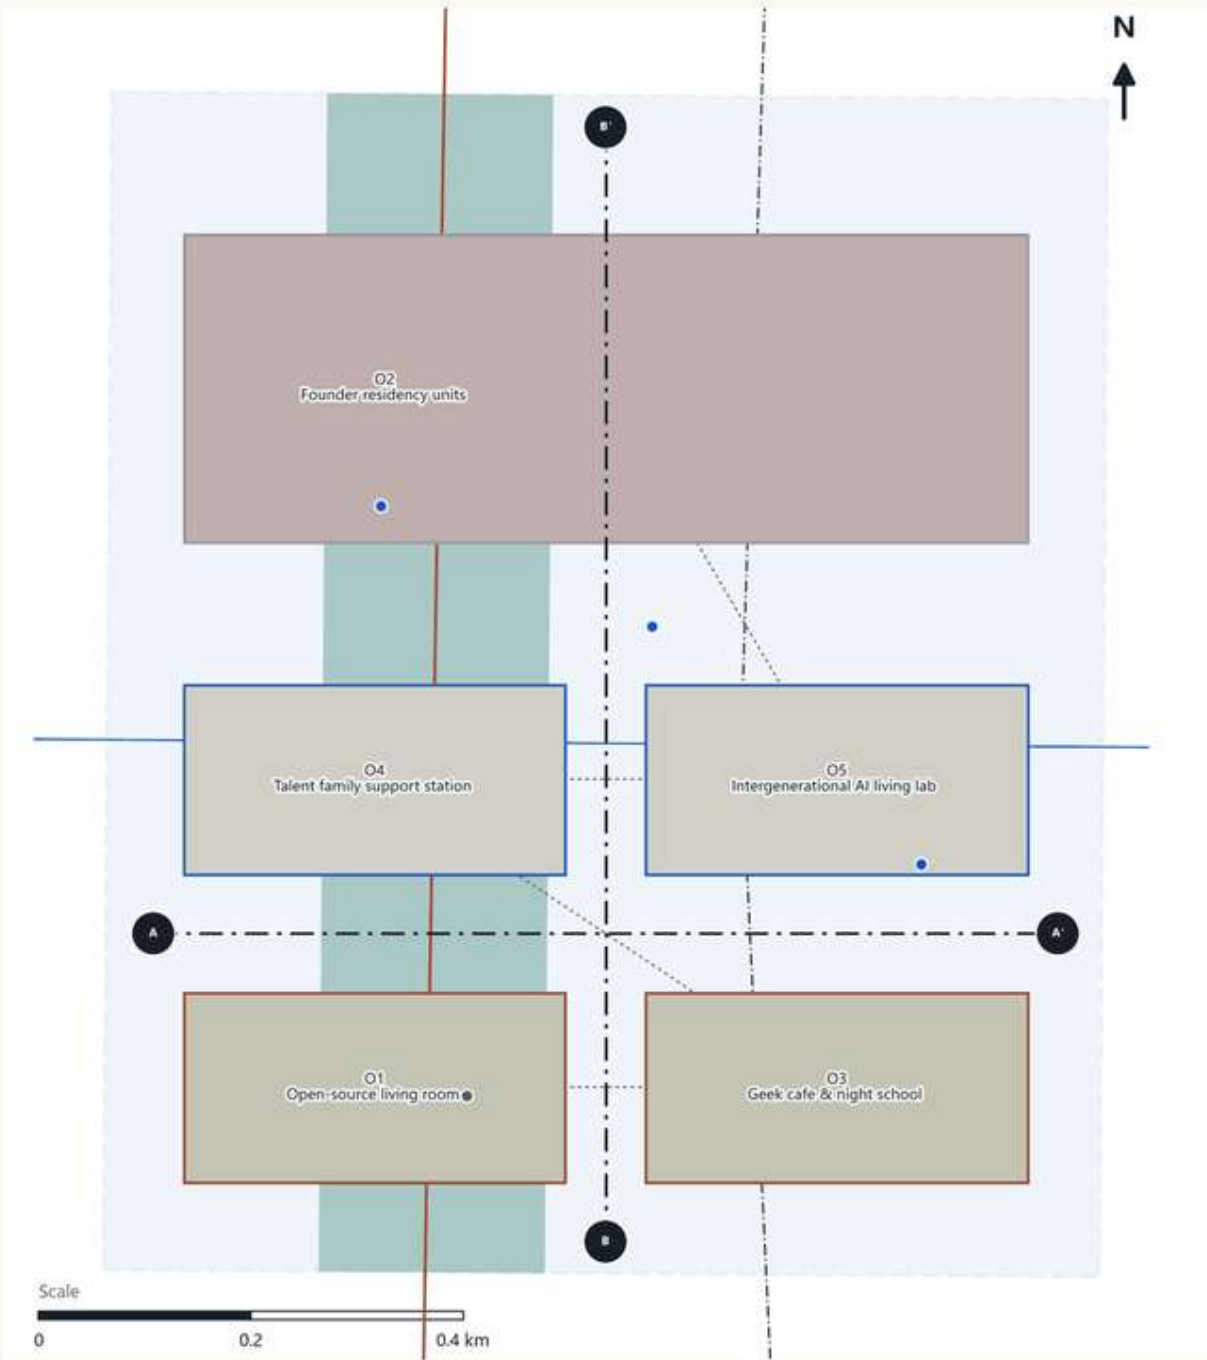

Conceptual indicative dimensions; pending survey and professional verification for perimeter (concept, pending verification)
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)



SPATIAL PRODUCT LOGIC

Public street → semi-public court → private residency

FUNCTION PLACEMENT (= PROJECTS)

- O1 Open-source living room
- O3 Geek cafe & night school
- O4 Talent family support station
- O5 Intergenerational AI living lab
- O2 Founder residency units

LEGEND

- Provisional constraint · key area (rough)
- Existing (indicative)
- Proposed renewal
- Concept addition
- Heritage slow spine
- Section lines A—A'/B—B'
- Scenario nodes (concept; type colors per MAP-06)

KEY DESIGN MOVES

1. Open ground floors
2. Time-shared semi-public courts
3. Short-stay residency pilots
4. Family support embedded

PENDING VERIFICATION

A—A' Mixed-use fire, acoustic and accessibility performance pending verification

B—B' Roof loads, egress, night noise and resident consultation pending verification


General: no survey/property/regulatory data; blocks are conceptual placement only.

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	AI ORIGIN • TALENT COMMUNITY concept plan
NO	K2-PLN · 2025-08-10 · EN
SCALE	NTS
DATA	CONCEPT / PENDING
dinglc2001	Completed using Agent

K2-FLO AI ORIGIN • TALENT COMMUNITY | GROUND-FLOOR INTERFACE & FLOWS

People · service · night time-shared flows · safety boundary (concept)

PENDING VERIFICATION NTS CONCEPT

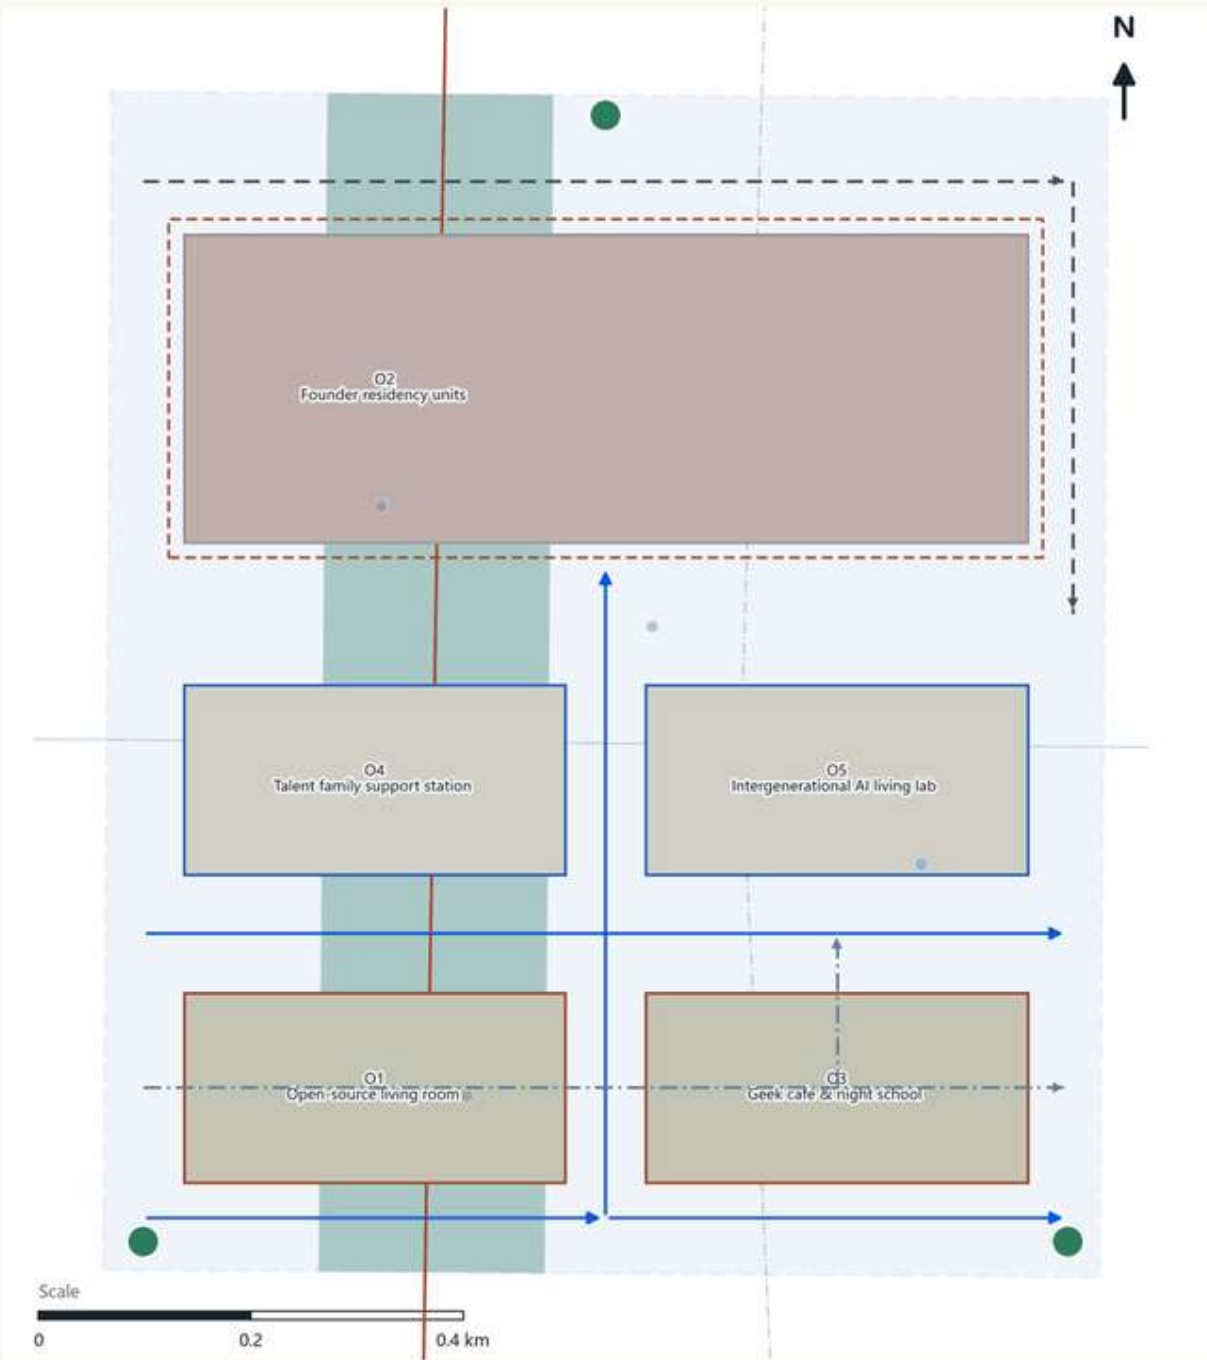

- LEGEND**
- Pedestrian flow (concept)
 - - - Service/logistics flow (concept)
 - · · Night time-shared flow (night school / co-creation)
 - - - Controlled-zone safety boundary
 - Main entries (concept)
 - Heritage slow spine

GROUND-FLOOR PRINCIPLES

- Ground floor: living room & cafe always open
- Semi-public courts time-shared
- Residency with independent access

Safety: bounded time/speed/area, remote takeover, human release, incident review

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	AI ORIGIN - TALENT COMMUNITY flows
NO	K2-FLO - 2026-08-10 - EN
SCALE	NTS
DATA	CONCEPT / PENDING
dingic2001	Completed using Agent

K2-SEC AI ORIGIN • TALENT COMMUNITY | SECTION SET

Concept sections • NTS • pending verification

PENDING VERIFICATION NTS CONCEPT

LEGEND

- Existing (indicative)
- Proposed renewal
- Concept addition
- Public
- Bookable shared
- Controlled
- Service/logistics
- Cut outline (L1)
- Projected outline (L3)
- Grid (L5)

Scale figure: person = 1.7 m

OPENNESS GRADIENT

Public street → semi-public court → private residency

SECTION INDEX

Cut lines A—A' / B—B' are indexed on the concept plan (K2-PLN)



PENDING VERIFICATION

A—A' Mixed-use fire, acoustic and accessibility performance pending verification

B—B' Roof loads, egress, night noise and resident consultation pending verification

General: structure, fire, MEP, utilities, cost and survey all pending;


Conceptual indicative dimensions; pending survey and professional verification

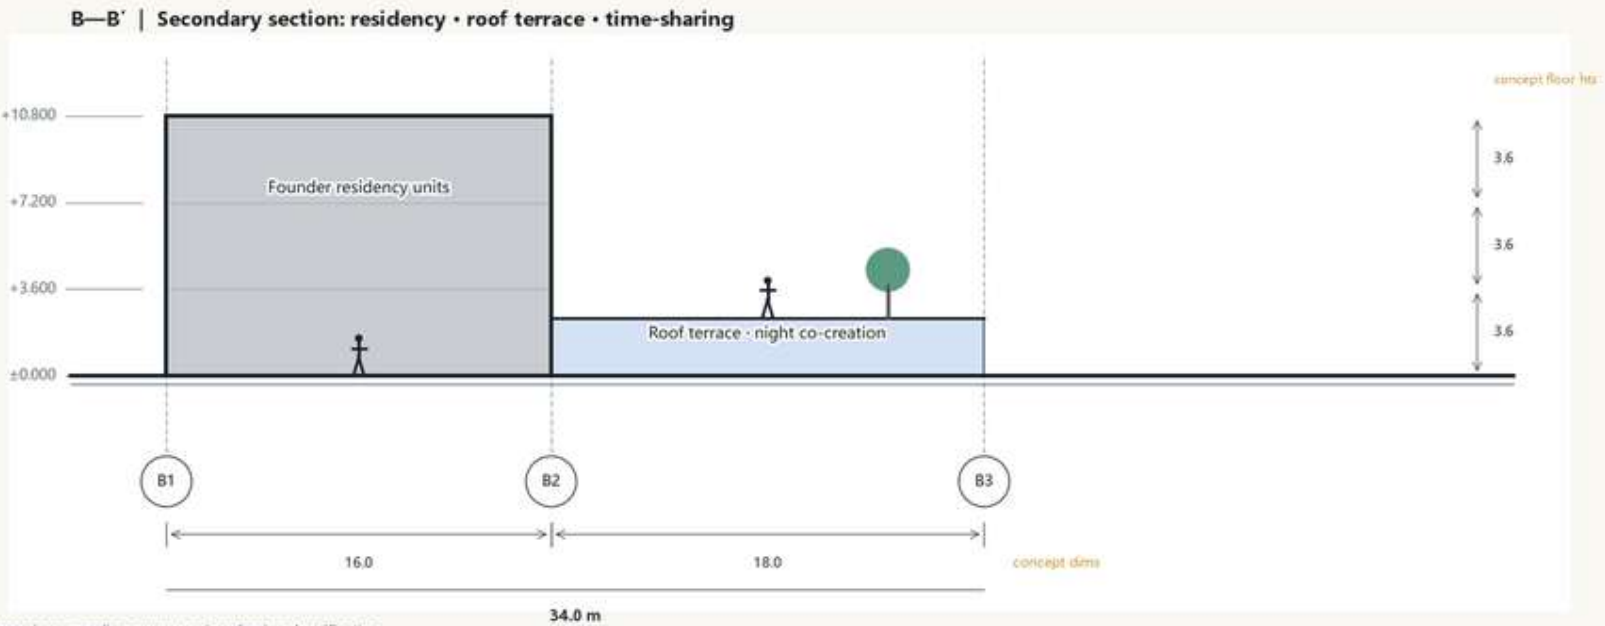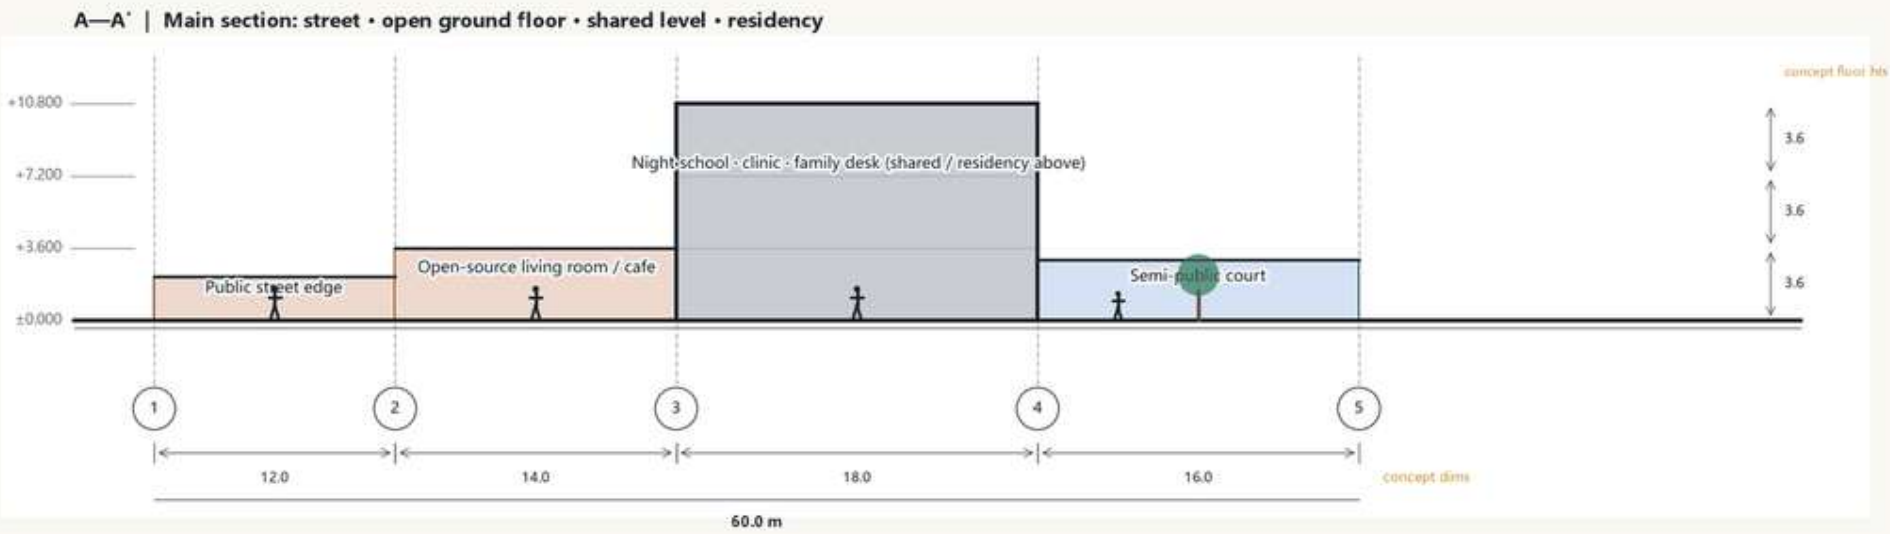

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	AI ORIGIN • TALENT COMMUNITY sections
NO	K2-SEC • 2026-08-10 • EN
SCALE	NTS
DATA	CONCEPT / PENDING
dinglc2001	Completed using Agent

Place demand, validation, compliance, procurement review and capital links on one enterprise-service street.

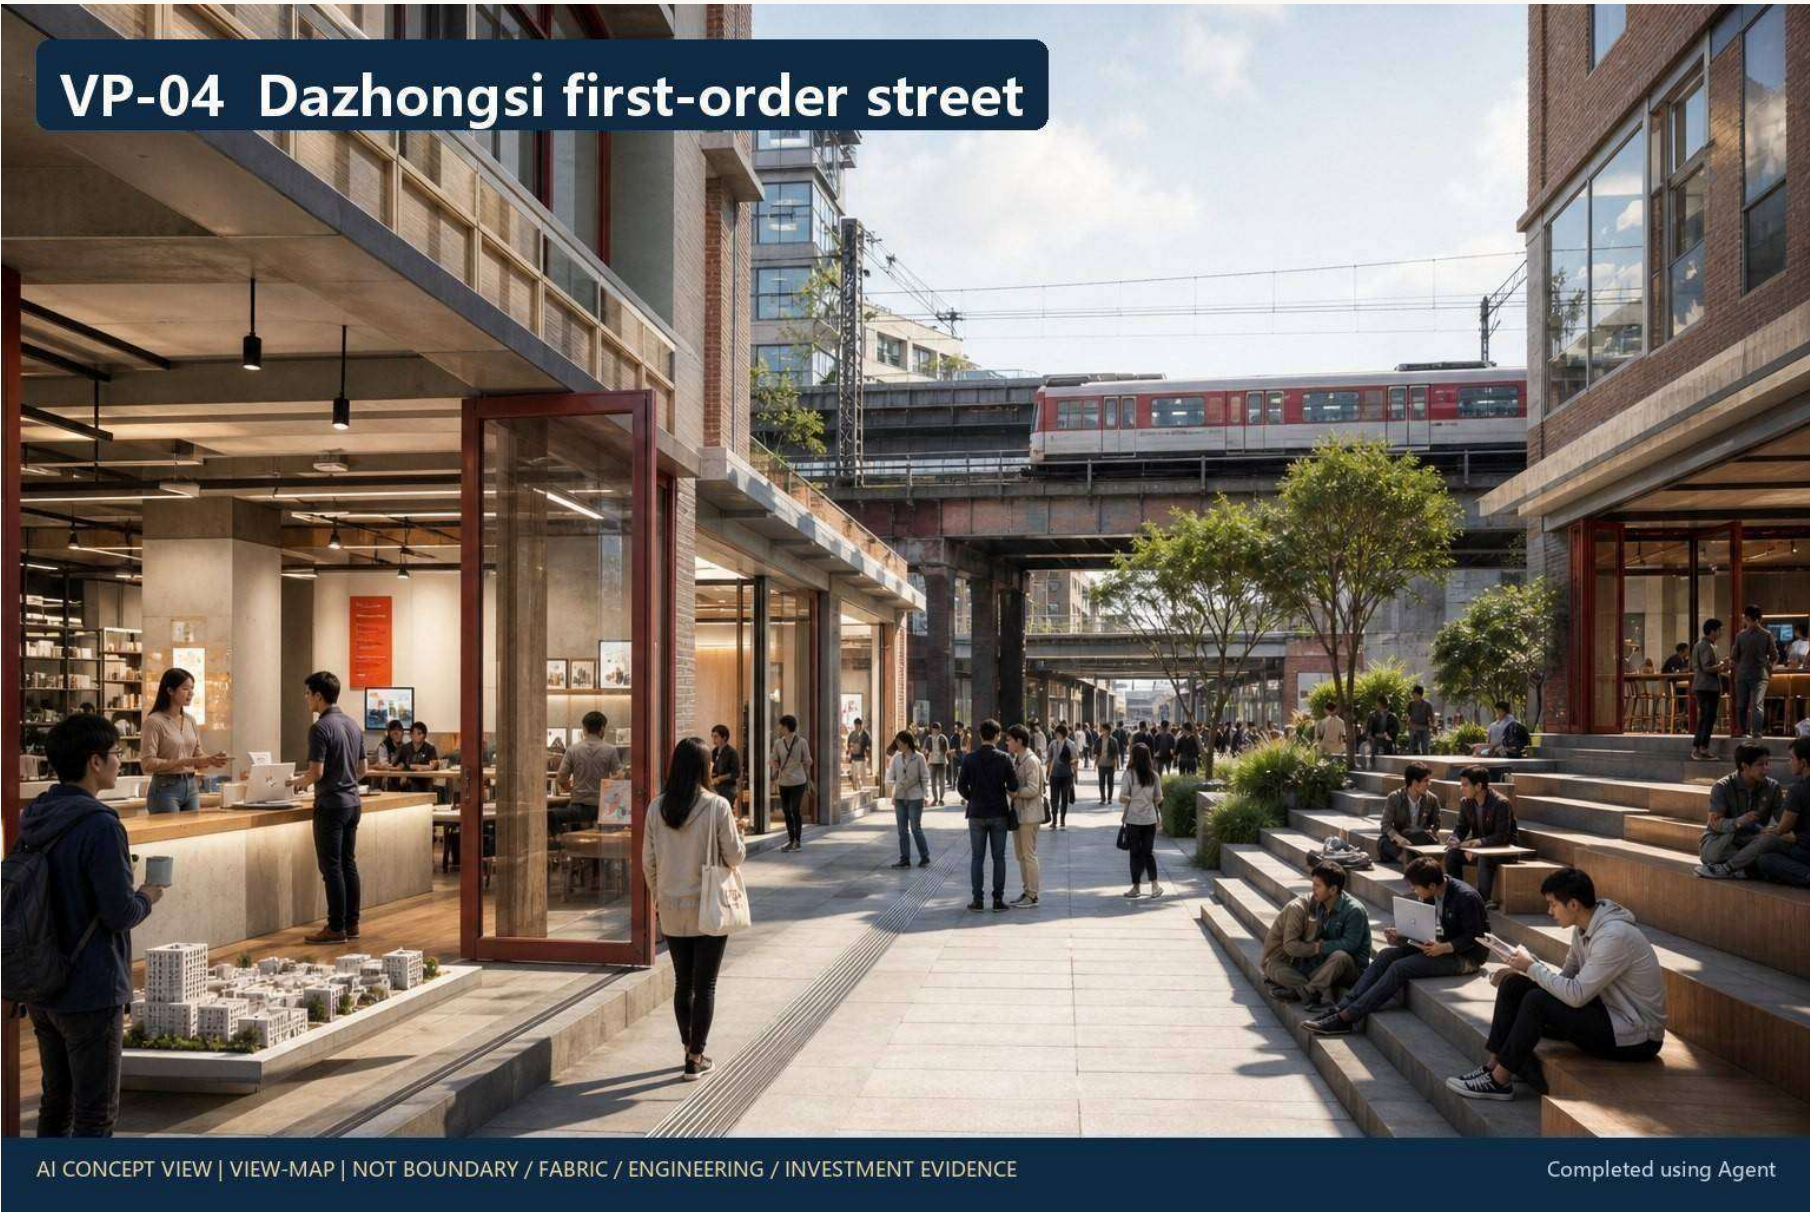

- Users | startups, growth firms, demand owners, services and investors
- Products | first-order center, service hall, compliance clinic, demo steps and exchange station
- Gates | transparent fees, named sign-off, conflict disclosure and no financing promise

AI-generated concept view. It does not prove buildings, boundaries, quantities, approvals or investment.

K3-PLN

DAZHONGSI • FIRST-ORDER CITY | CONCEPT PLAN


Concept placement · NTS · pending verification

PENDING VERIFICATION

PROVISIONAL

NTS

CONCEPT

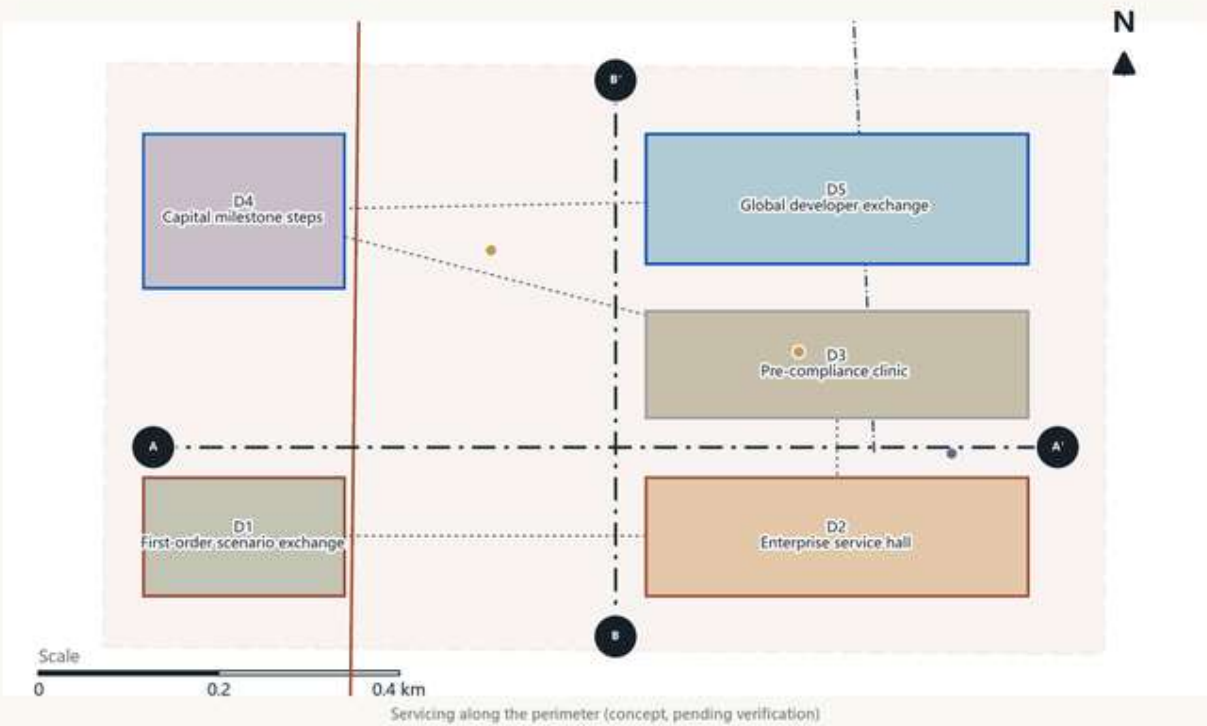

SPATIAL PRODUCT LOGIC

Public portal — shared services — controlled offices

FUNCTION PLACEMENT (= PROJECTS)

- D1 First-order scenario exchange
- D2 Enterprise service hall
- D3 Pre-compliance clinic
- D4 Capital milestone steps
- D5 Global developer exchange

LEGEND

- Provisional constraint · key area (rough)
- Existing (indicative)
- Proposed renewal
- Concept addition
- Heritage slow spine
- Section lines A—A'/B—B'
- Scenario nodes (concept; type colors per MAP-06)

KEY DESIGN MOVES

1. Portal arrival sequence
2. Canopied open ground floor
3. Street-facing first-order showcase
4. Time-managed night frontage

PENDING VERIFICATION

- A—A' Canopy structure, crowd distribution and fire safety pending verification
- B—B' Night noise, outdoor-display limits and cross-border data compliance pending verification

General: no survey/property/regulatory data; blocks are conceptual placement only.


Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	DAZHONGSI • FIRST-ORDER CITY concept plan
NO	K3-PLN - 2026-08-10 · EN
SCALE	NTS
DATA	CONCEPT / PENDING
	dinglc2001 · Completed using Agent

K3-FLO DAZHONGSI • FIRST-ORDER CITY | GROUND-FLOOR INTERFACE & FLOWS

People · service · first-order & capital flows · safety boundary (concept)

PENDING VERIFICATION NTS CONCEPT

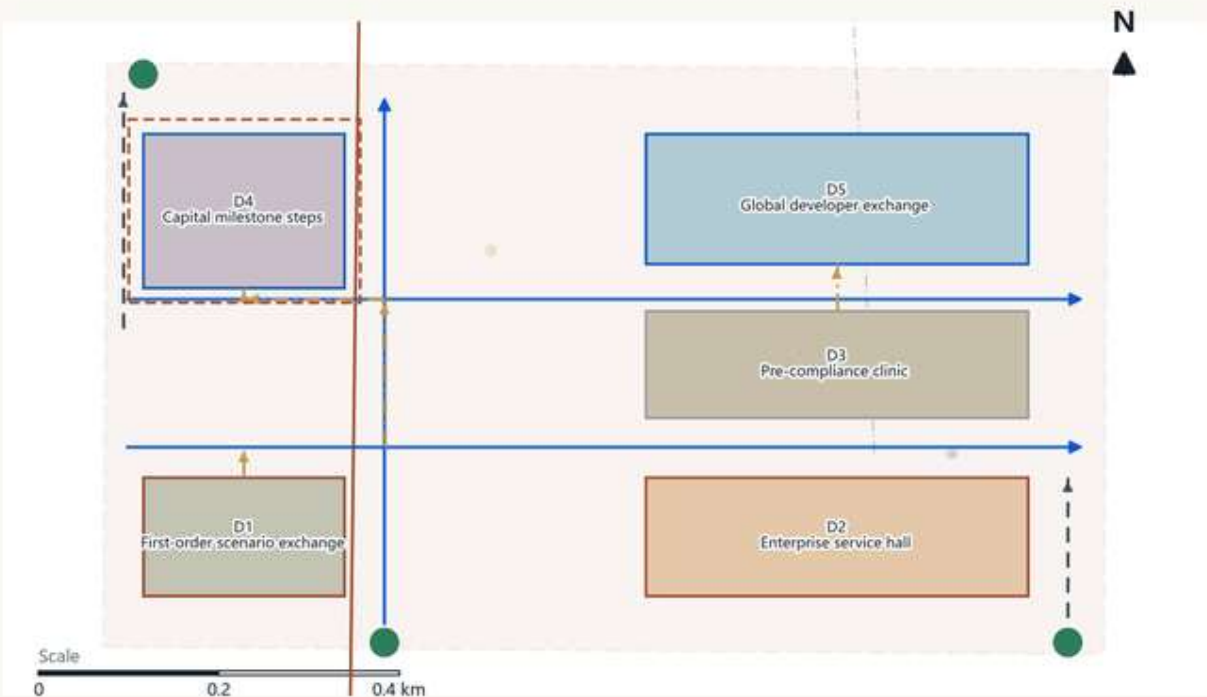

- LEGEND**
- Pedestrian flow (concept)
 - Service/logistics flow (concept)
 - First-order & capital flow (showcase → roadshow)
 - Controlled-zone safety boundary
 - Main entries (concept)
 - Heritage slow spine
- GROUND-FLOOR PRINCIPLES**
- Ground floor: showcase & service hall fully open
 - Offices/roadshow bookable
 - Time-managed night frontage
- Safety: bounded time/speed/area, remote takeover, human release, incident review



Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	DAZHONGSI - FIRST-ORDER CITY flows
NO	K3-FLO - 2026-08-10 - EN
SCALE	NTS
DATA	CONCEPT / PENDING
dingic2001	Completed using Agent

K3-SEC DAZHONGSI • FIRST-ORDER CITY | SECTION SET

Concept sections • NTS • pending verification

PENDING VERIFICATION NTS CONCEPT

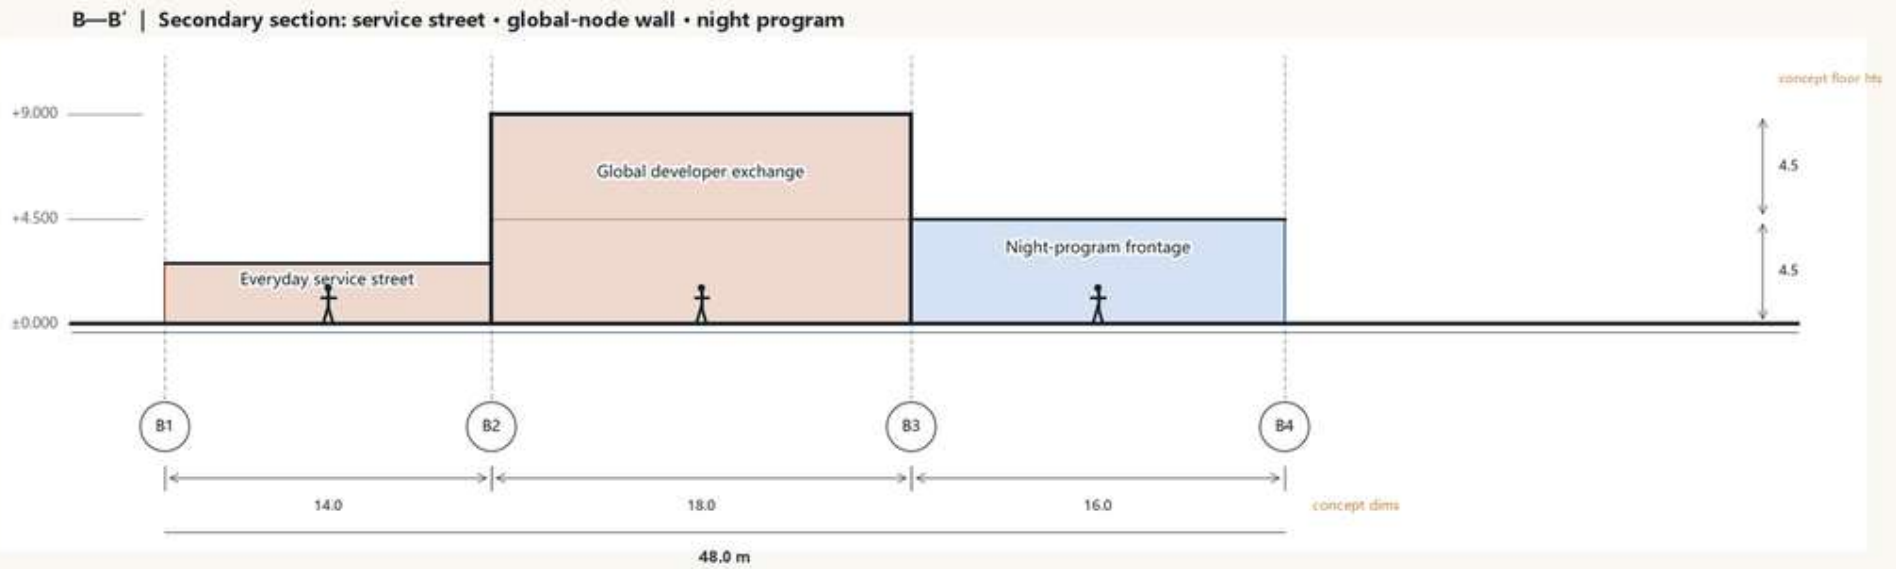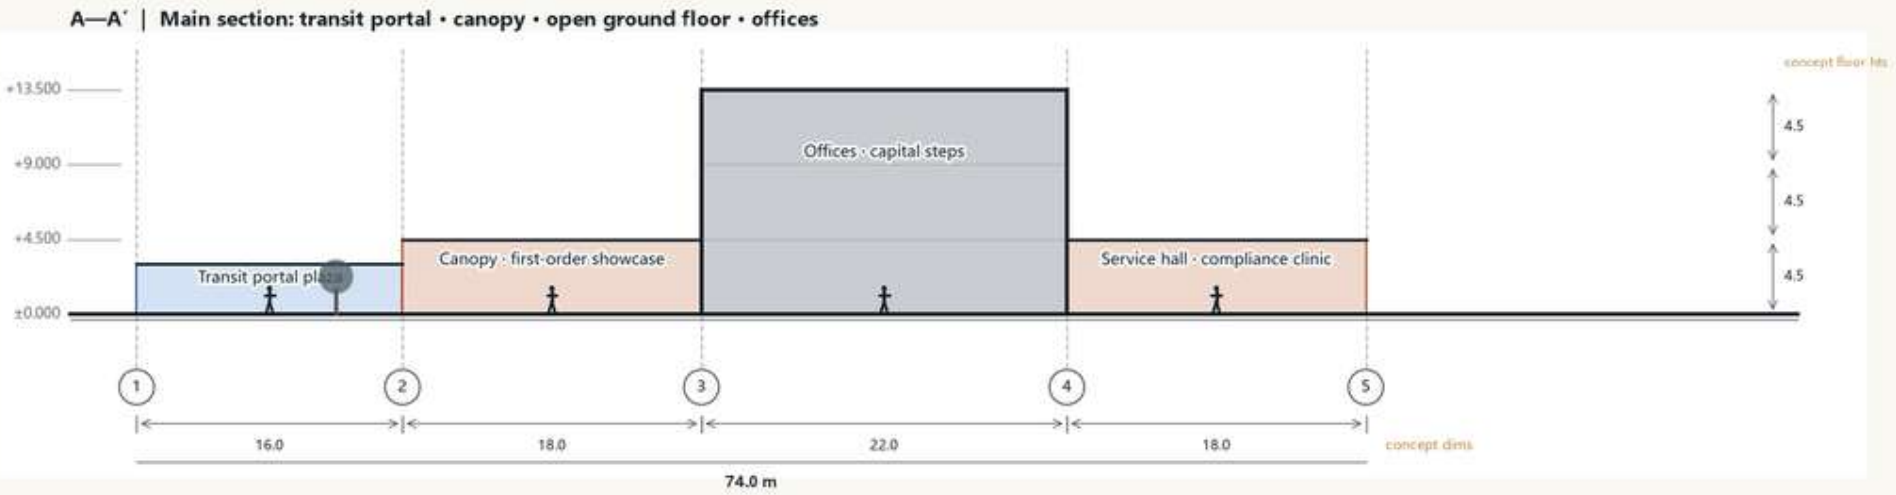

LEGEND

- Existing (indicative)
- Proposed renewal
- Concept addition
- Public
- Bookable shared
- Controlled
- Service/logistics
- Cut outline (L1)
- Projected outline (L3)
- Grid (L5)

Scale figure: person ≈1.7 m

OPENNESS GRADIENT

Public portal → shared services → controlled offices

SECTION INDEX

Cut lines A—A' / B—B' are indexed on the concept plan (K3-PLN)

PENDING VERIFICATION

A—A' Canopy structure, crowd distribution and fire safety pending verification

B—B' Night noise, outdoor-display limits and cross-border data compliance pending verification

General: structure, fire, MEP, utilities, cost and survey all pending;

Conceptual indicative dimensions; pending survey and professional verification

Conceptual indicative dimensions; pending survey and professional verification
Source: official package geometry/*geojson and metrics.json (recomputed in EPSG:4548)

JINGZHANG GROWTH MESH An AI talent-and-enterprise symbiotic community: from park to city to network	
FIG	DAZHONGSI • FIRST-ORDER CITY sections
NO	K3-SEC • 2026-08-10 • EN
SCALE	NTS
DATA	CONCEPT / PENDING
dinglc2001	Completed using Agent

ID / project	Problem → action	Operator / funding type	Phase / stop gate
Z1 Shared validation laboratory	Small teams lack trusted test facilities → Verify large spans, then operate shared equipment through booking, tiered access and professional sign-off	Professional test operator; account by equipment hour and task service; Quasi-public: public guidance plus equipment service; amount pending	0-1 year protocol and small pilot; No move-in without structure, fire and load sign-off
Z2 Domestic compute adaptation workshop	Domestic-compute migration has high trial cost → Run adaptation, migration and review with authorized data in an isolated environment	Compute provider plus open-source community; task and equipment fees; Quasi-public: provider input, policy tools and task fees	0-1 year first task cohort; Pause if provenance, authorization or isolation is unclear
Z3 Bounded robotics test loop	Robotics firms lack a low-risk urban test setting → Use physical limits, time windows, speed caps, e-stop, remote takeover and on-site safety staff	Site operator plus accountable safety entity; charge by test window; Quasi-public: site input plus test fees	0-1 year closed tests; E-stop on public-lane intrusion or takeover failure
Z4 Standards co-creation room	Test results rarely become cross-firm rules → Organize problem sheet, evidence pack, workshop and public summary	Industry association plus professionals; dues and task procurement; Public-benefit: public support plus association resources	0-1 year quarterly workshop; No topic without a problem owner and clear IP boundary
Z5 Public science interface	Secure testing lacks an interface for public understanding → Provide observation walks, weekend opening and non-sensitive result interpretation	Park operator plus science institution; public-service procurement; Public-benefit: public and science-institution input	0-1 year weekend pilot; No opening before segregation, interpretation duty and rights clearance
O1 Origin open-source living room	Developers attend events but lack durable project collaboration → Run weekly clinics, maintainer hours and contribution records	Community operator plus maintainers; membership and public subsidy; Quasi-public: public subsidy, sponsorship and services	0-1 year operate before works; Adjust if license disputes persist or footfall produces no projects
O2 Founder residency units	Early teams lack affordable short-cycle work-life support → Use small short-stay cohorts, explicit use, mentor recusal and stage review	Professional incubator; short-stay and incubation services; Commercial: operating income plus incubation fund	1-3 year rolling small cohorts; No occupancy without legal use, fire safety and fair selection
O3 Geek cafe and night school	Researchers and residents lack a low-barrier evening interface → Use time-shared rooms, co-created courses, noise limits and no-purchase seats	Community business plus course curator; separate food and course accounts; Commercial: operating and course income	0-1 year lightning-talk pilot; Reduce hours if disturbance or consumption displaces public time
O4 Talent family support station	Talent families face high childcare, eldercare and emergency referral cost → Provide a human desk, authorized referral, receipt and withdrawal	Community service institution; public-service procurement; Public-benefit: public and community-service funding	0-1 year needs register, then recurring service; Stop the interface on unconfirmed referral or privacy linkage
O5 Intergenerational AI living lab	R&D; misses life feedback while residents risk becoming passive subjects → Use small co-creation, free exit, equivalent offline service and ethics review	Community plus technical team; research service and public support; Quasi-public: public subsidy plus technical input	1-3 year bounded co-creation; Stop if withdrawal fails or basic service depends on participation
D1 First-order scenario center	Early projects struggle to secure a first real customer → Use a problem catalogue, validation sheet, co-sign and procurement review	Industry operating platform; service fee and procurement support; Quasi-public: operating income plus service fees	0-1 year problem catalogue, then recurring; Remove false demand or undisclosed conflicts immediately
D2 Enterprise service hall	Startups spend heavily finding registration, tax and IP services → Provide one catalogue, named professionals, booking and evaluation	Professional service consortium; transparent service fees; Commercial: service fees plus space operation	1-3 year staged entry; No entry without transparent qualification, price and accountability
D3 Pre-compliance clinic	AI firms lack compliance judgment before opening and scenario launch → AI only organizes material; qualified professionals review, sign and record limits	Registration, legal and IP professionals; per-case service; Commercial: professional service fees	0-1 year checklist pilot; Refuse unsigned, out-of-scope or obsolete advice
D4 Capital milestone steps	Projects have many pitches but little milestone and risk evidence → Admit only evidence-gated projects using milestone, risk and use-of-funds templates	Operator plus investment institutions; event service fees; Commercial: event and professional services	1-3 year quarterly sessions; Remove misleading presentation or evidence-deficient projects
D5 Global developer exchange	International collaboration often stops at one-off events → Use bilingual problems, open-source license, node recognition and 90-day follow-up	Community operator plus written-confirmed partners; project basis; Quasi-public: public support plus partner input	3-5 years after evidence matures; No name/mark use or cross-border transfer without written confirmation

Z1	Shared validation laboratory	Evidence problem Small teams lack trusted test facilities	Build / operate Verify large spans, then operate shared equipment through booking, tiered access and professional sign-off	Output / acceptance Equipment catalogue, booking protocol, test sheet and incident log; Equipment use, reproducible-test share and major incidents	Stop gate No move-in without structure, fire and load sign-off
Z2	Domestic compute adaptation workshop	Evidence problem Domestic-compute migration has high trial cost	Build / operate Run adaptation, migration and review with authorized data in an isolated environment	Output / acceptance Compatibility report, migration list and issue knowledge base; Report review rate, closed migrations and leak incidents	Stop gate Pause if provenance, authorization or isolation is unclear
Z3	Bounded robotics test loop	Evidence problem Robotics firms lack a low-risk urban test setting	Build / operate Use physical limits, time windows, speed caps, e-stop, remote takeover and on-site safety staff	Output / acceptance Test-window plan, opening checklist, incident and review logs; Unhandled boundary breach, e-stop response and incident closure	Stop gate E-stop on public-lane intrusion or takeover failure
Z4	Standards co-creation room	Evidence problem Test results rarely become cross-firm rules	Build / operate Organize problem sheet, evidence pack, workshop and public summary	Output / acceptance Topic register, minutes, evidence summary and draft advice; Drafts produced, adoption feedback and rights disputes	Stop gate No topic without a problem owner and clear IP boundary
Z5	Public science interface	Evidence problem Secure testing lacks an interface for public understanding	Build / operate Provide observation walks, weekend opening and non-sensitive result interpretation	Output / acceptance Opening rules, science script, risk separation and feedback; Open hours, accessible coverage and complaint closure	Stop gate No opening before segregation, interpretation duty and rights clearance

O1	Origin open-source living room	Evidence problem Developers attend events but lack durable project collaboration	Build / operate Run weekly clinics, maintainer hours and contribution records	Output / acceptance License list, roadmap, responsibility allocation and review; Persistent teams, merged contributions and dispute closure	Stop gate Adjust if license disputes persist or footfall produces no projects
O2	Founder residency units	Evidence problem Early teams lack affordable short-cycle work-life support	Build / operate Use small short-stay cohorts, explicit use, mentor recusal and stage review	Output / acceptance Residency agreement, recusal record, milestone and exit form; Completion, team stability and exit disputes	Stop gate No occupancy without legal use, fire safety and fair selection
O3	Geek cafe and night school	Evidence problem Researchers and residents lack a low-barrier evening interface	Build / operate Use time-shared rooms, co-created courses, noise limits and no-purchase seats	Output / acceptance Program, conversion checklist, noise and feedback records; Repeat programs, no-purchase hours and disturbance complaints	Stop gate Reduce hours if disturbance or consumption displaces public time
O4	Talent family support station	Evidence problem Talent families face high childcare, eldercare and emergency referral cost	Build / operate Provide a human desk, authorized referral, receipt and withdrawal	Output / acceptance Service catalogue, referral, receipt and complaint closure; Effective referrals, response time, withdrawals and complaints	Stop gate Stop the interface on unconfirmed referral or privacy linkage
O5	Intergenerational AI living lab	Evidence problem R&D; misses life feedback while residents risk becoming passive subjects	Build / operate Use small co-creation, free exit, equivalent offline service and ethics review	Output / acceptance Consent, test, exit/deletion and needs records; Withdrawal execution, adopted needs and adverse events	Stop gate Stop if withdrawal fails or basic service depends on participation

D1	First-order scenario center	Evidence problem Early projects struggle to secure a first real customer	Build / operate Use a problem catalogue, validation sheet, co-sign and procurement review	Output / acceptance Problem sheet, validation report, conflict declaration and procurement review; Complete evidence chains, procurement-review conversion and false demand	Stop gate Remove false demand or undisclosed conflicts immediately
D2	Enterprise service hall	Evidence problem Startups spend heavily finding registration, tax and IP services	Build / operate Provide one catalogue, named professionals, booking and evaluation	Output / acceptance Service catalogue, qualifications, prices, booking and receipt; Closed services, reduced repeat inquiries and complaint handling	Stop gate No entry without transparent qualification, price and accountability
D3	Pre-compliance clinic	Evidence problem AI firms lack compliance judgment before opening and scenario launch	Build / operate AI only organizes material; qualified professionals review, sign and record limits	Output / acceptance Opening checklist, signed advice, referral and version record; Professional sign-off, correction closure and out-of-scope refusal	Stop gate Refuse unsigned, out-of-scope or obsolete advice
D4	Capital milestone steps	Evidence problem Projects have many pitches but little milestone and risk evidence	Build / operate Admit only evidence-gated projects using milestone, risk and use-of-funds templates	Output / acceptance Evidence pack, disclosure, Q&A; record and follow-up; Valid follow-ups, information corrections and complaints	Stop gate Remove misleading presentation or evidence-deficient projects
D5	Global developer exchange	Evidence problem International collaboration often stops at one-off events	Build / operate Use bilingual problems, open-source license, node recognition and 90-day follow-up	Output / acceptance Rights-cleared content, exchange record, follow-up and withdrawal route; Continuing collaboration, bilingual access and rights objections	Stop gate No name/mark use or cross-border transfer without written confirmation

Scenario	Task chain	No-AI equivalent	Human release	Exit / acceptance
SCN-01 Model safety evaluation sandbox	Register— isolate—two-person review—sign-off—review	Offline test sheet and human panel	Safety lead releases high-risk results	Seal on privilege breach, irreproducibility or isolation failure; Complete version, permission, test and review record
SCN-02 Domestic compute adaptation workshop	Book—authorize—adapt—review—migration list	Human compatibility test and document comparison	Firm confirms report release	Withdraw on leak or failed migration; Reviewable report with authorized inputs
SCN-03 Bounded robotics field loop	Opening check—bounded run—takeover—review	Physical barrier, safety staff and manual testing	Daily human opening and remote takeover	E-stop on breach or takeover failure; No unhandled breach; all events logged
SCN-04 Open-source project clinic	License check—diagnosis—roadmap—ownership	In-person code review and paper checklist	Maintainer confirms license and merge	Pause on license or attribution dispute; License, roadmap and owner list per case
SCN-05 Founder residency	Apply—conflict check—reside—review—exit	Public desk application and interview	Voluntary disclosure and mentor recusal	Terminate on unresolved bias or conflict; Complete exit, deletion and ownership clauses
SCN-06 AI talent night school	Co-create—review—teach—feedback—repeat	On-site registration, print and human teaching	Instructor reviews content; operator controls time	Cancel or reschedule unsafe/disturbing content; Syllabus, feedback and noise-response record
SCN-07 Intergenerational AI living lab	Co-create—consent—small test—human service—exit/delete	Fully equivalent offline service	Participant/guardian consent + ethics review	Exit and delete on distress or withdrawal; 100% reversible; basic service not conditional
SCN-08 Accessible multimodal wayfinding	Professional route check—publish—assist—close complaints	Physical signs, human desk and paper map	Accessibility professional signs off	Switch offline on error or outage; Professional pre-opening check and traceable complaints
SCN-09 Talent family support station	Register—human confirm—authorize—receipt/withdraw	Walk-in and phone referral	Human desk confirms each referral	Stop interface on wrong referral or privacy linkage; Authorization, receipt and withdrawal every time
SCN-10 First-order scenario exchange	Publish—conflict disclose—validate—co-sign—procurement review	Public problem session, human panel and offline matching	Demand owner and compliance co-sign	Remove false demand or conflict; Complete problem-validation-procurement evidence
SCN-11 Enterprise compliance clinic	Classify—retrieve—human review—sign or refer	Human consultation and paper checklist	Qualified professional signs formal advice	Refuse bad, out-of-scope or obsolete advice; All formal advice traceable to signer
SCN-12 Urban-agent operations desk	Read—recommend—human authorize—act—audit—appeal	Manual register, phone and in-person service	Human authorization for each high-risk action	Read-only on breach, drift or appeal backlog; Least privilege, full logs, sampling and takeover

**Researchers**

Core need | Research transfer and collaboration

Spatial entry | Trusted tests, clinics and sign-off

Public boundary | Judge conversion by project evidence, not footfall

**Independent developers**

Core need | Affordable entry and peers

Spatial entry | Short desks, open-source room and compute adaptation

Public boundary | Keep a no-membership, no-app public entry

**Startup teams**

Core need | Stable team, validation and first customer

Spatial entry | Residency, testing, first order and compliance

Public boundary | Pitching or intent never substitutes for first-order evidence

**Growth companies**

Core need | Expansion, standards and capital links

Spatial entry | Shared facilities, service hall and milestone sessions

Public boundary | Growth firms return equipment, mentors or public hours

**Services and investors**

Core need | Trusted entry and duty limits

Spatial entry | Named sign-off, transparent fees and evidence packs

Public boundary | Disclose qualification, conflicts and suitability

**Resident families**

Core need | Convenient life without forced testing

Spatial entry | Family support, accessibility and intergenerational co-creation

Public boundary | Basic service not tied to data consent; always reversible

**Operators and stewards**

Core need | Schedulable, auditable and stoppable operation

Spatial entry | Operations desk, event logs and quarterly review


Public boundary | Human authorization for high-risk action; no evidence, no scale

DIA-03

AI TALENT JOURNEY: SHARED PATH & KEY DIFFERENCES

Enter → connect → collaborate → validate → first order → grow → give back

CONCEPT

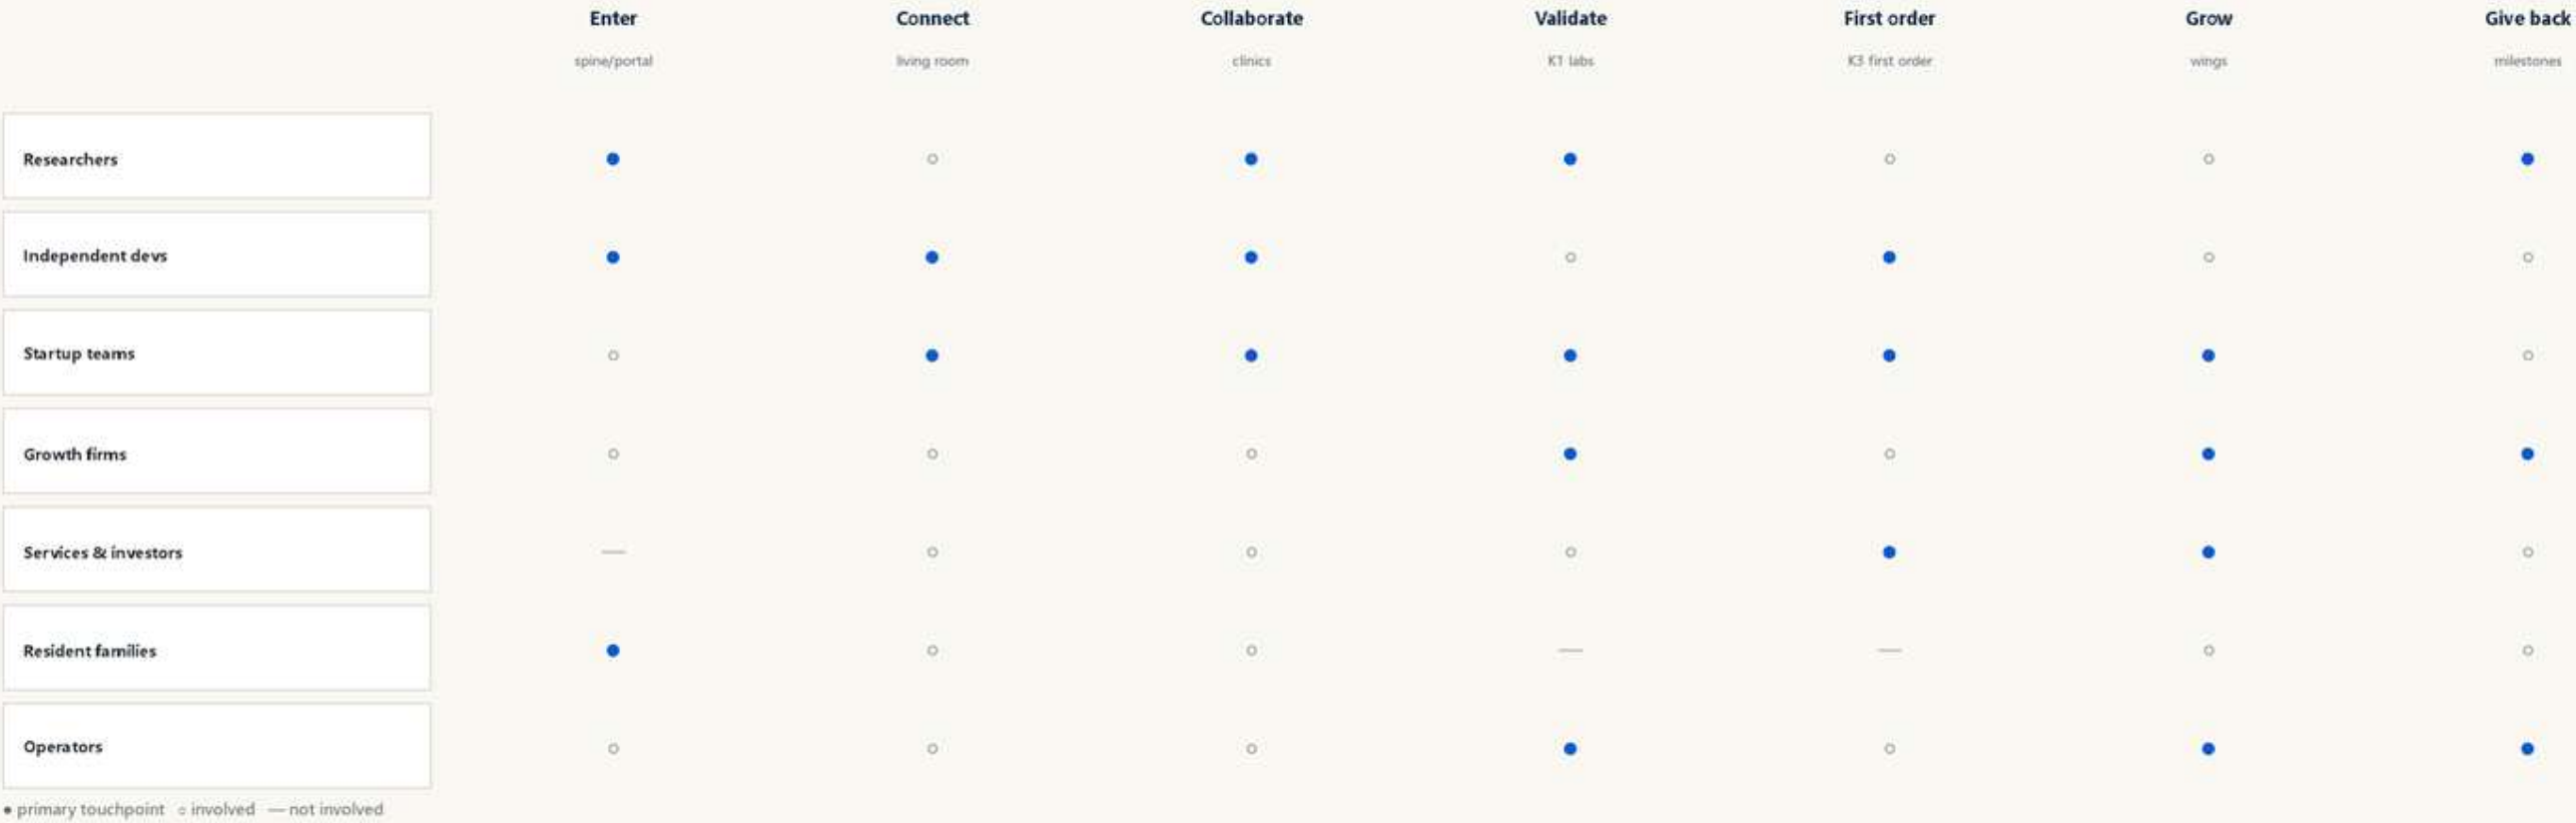

KEY BREAKPOINTS (DESIGN INTERVENTIONS)

BP1: no collaboration entry after arrival → front-desk clinics

BP2: no facilities/authorization → tiered shared labs

BP3: project-to-order gap → first-order exchange & pre-compliance

BP4: growth lacks space/capital → wings + milestone capital

A service-design tool, not personal tracking; minimum data and opt-out apply.

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG

AI talent journey

NO

DIA-03 · 2026-08-10 · EN

SCALE


NTS

DATA

CONCEPT

dinglc2001

· Completed using Agent

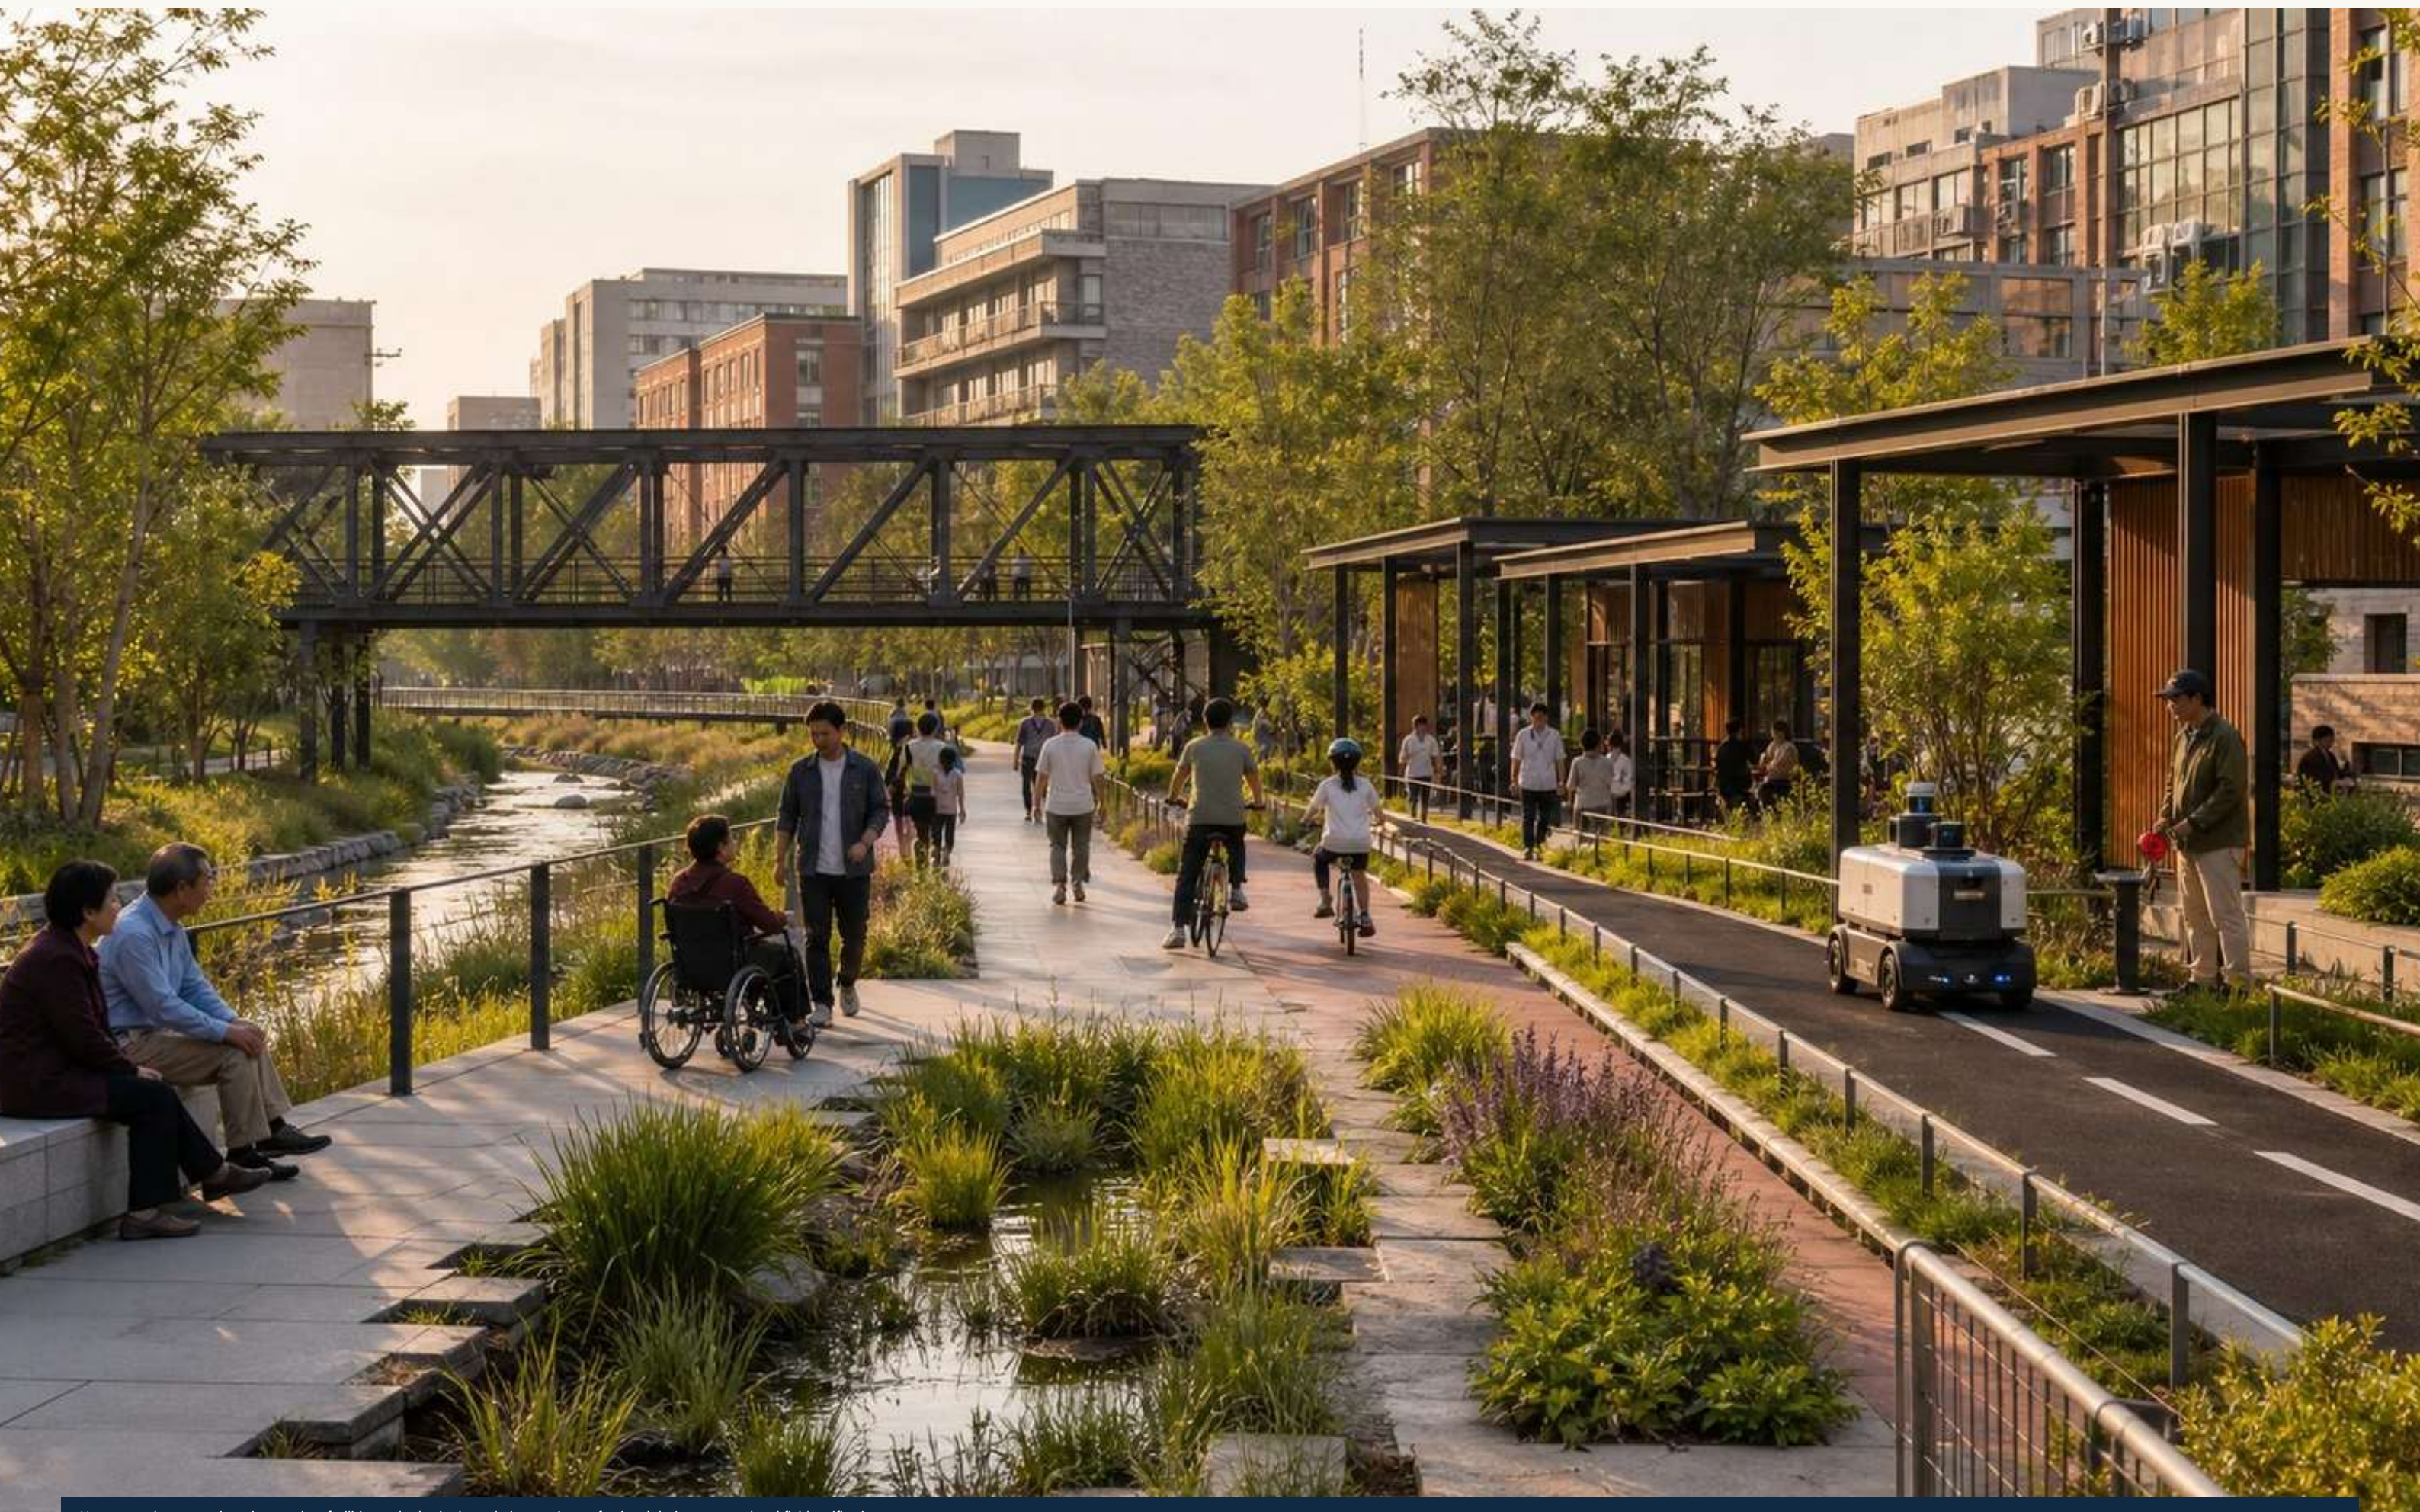

AI-generated concept view; river section, facilities and robotics boundaries require professional design, approval and field verification.

OPS-A1 OPERATIONS AND PROJECT CONTRACTS


Space is governed by who provides what, who pays, what counts as completion and when a service stops.



A | ANNUAL SERVICE CATALOGUE AND SEPARATE ACCOUNTS

SERVICE	PUBLIC DUTY	OPERATING INCOME	COST ACCOUNT	MINIMUM EVIDENCE / STOP GATE
Shared verification lab	inclusive hours / safety	equipment + task service	equipment / sign-off / insurance	structure and fire sign-off; suspend until incident closure
Open-source lounge / night school	non-purchase seats / community time	membership + course + F&B share	curation / tutor / noise	repeat projects and sessions; reduce hours after nuisance
First-order enterprise service	problem catalogue / transparent fee	professional + event service	compliance / match / venue	dual-signed demand; delist undisclosed conflicts

B | MINIMUM PROJECT CONTRACT FIELDS — APPLIES TO ALL 15 PROJECTS

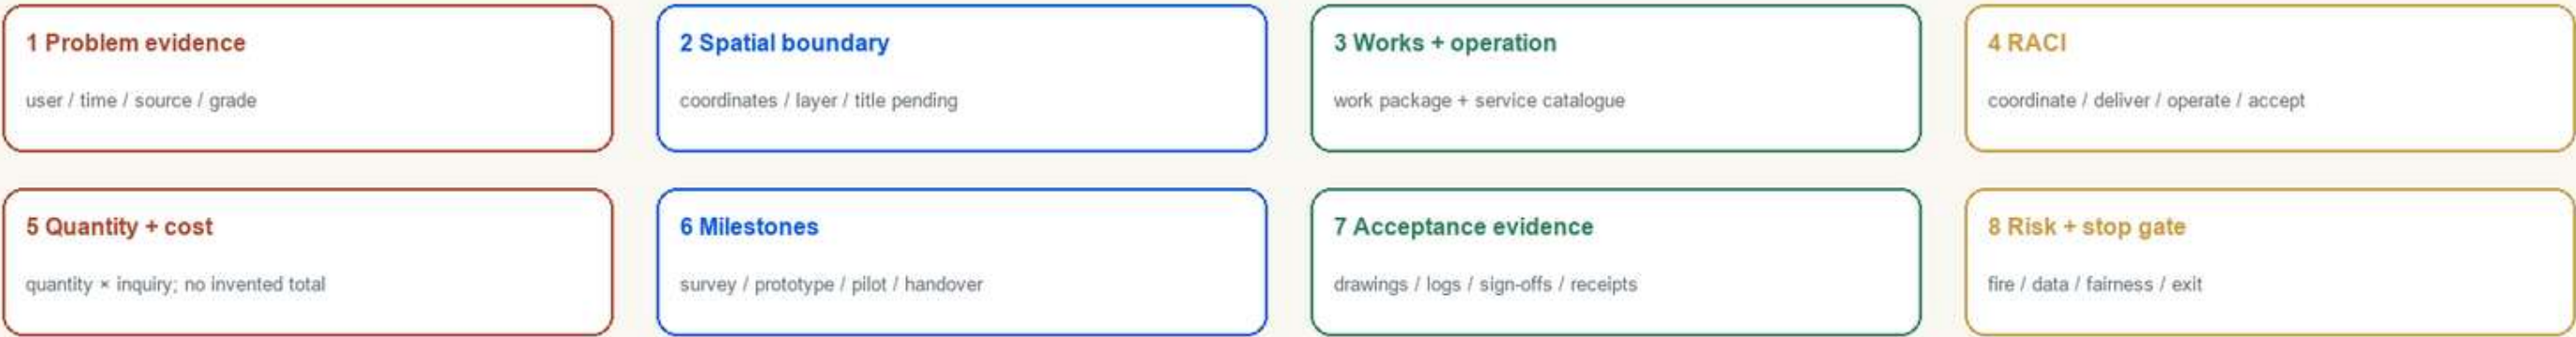

Operating account = space + equipment + professional services + events – staff – energy – maintenance – insurance – public-service floor.

Non-binding operating model; legal entities, amounts, rent, investment and procurement require formal authority and market inquiry.

PROVISIONAL CONSTRAINT | CONCEPT PLAN | PROFESSIONAL VERIFICATION REQUIRE

Package	Scope	Acceptance evidence	Stop gate
WP0 Baseline and rights	survey, structure/fire, utilities, title, needs, heritage	signed boundaries, registers and interviews	No E3 closure, no works
WP1 Public base	stitches, accessibility, stormwater, light, wayfinding	node sections, samples, as-built checks	Keep emergency and anonymous passage
WP2 Verification	labs, adaptation, test loop, standards	equipment list, test sheets, incident logs	Stop without fire/load/insurance
WP3 Incubation	open-source lounge, residence, night school, family	selection, receipts, exit records	Adjust on failed fairness/public hours
WP4 Conversion	first orders, enterprise, compliance, demo	problem sheet, sign-off, conflict, review	Remove false or unqualified demand
WP5 Culture	heritage axis, landmarks, annual curation	rights, samples, maintenance manual	No uncleared archives or marks
WP6 Operations	catalogue, accounts, dashboard, appeal	RACI, accounts, logs, quarterly review	Suspend expansion on evidence gaps

Phase	Decision	Projects	Evidence before next gate
0–90 days	baseline, rights, user interviews, service pilots	WP0; O1/O3; D3/D1	survey pack; signed problem list; pilot receipts
0–1 year	reversible public base and small-scope tests	WP1–2; Z1–Z5	professional sign-offs; incident/usage evidence
1–3 years	three-core operation and six stitches	WP3–4; O2/O4/O5; D2/D4	service accounts; access and first-order evidence
3–5 years	scale only proven services and exchange	WP5–6; D5	quarterly review; rights and partner confirmation
Continuous	maintain, appeal, review, adjust or exit	all projects	EHS/NIS evidence chain; public response

Cost family	Quantity unit	Required source	Pricing method
Public realm	m² paving / planting; m edge; crossings	survey + approved drawings	quantity × market inquiry
Building renewal	m² by repair / reversible fit-out / MEP	measured survey + appraisal	bill of quantities by work package
Test equipment	sets, load, power, safety systems	operator brief + equipment schedule	supplier inquiry + insurance
Operations start-up	FTE-month, programmes, service hours	service catalogue + staffing plan	unit operating accounts
Risk reserve	only after scope and delivery mode	risk register + professional estimate	transparent contingency rule

DIA-07 DELIVERY PACKAGES, STAGE GATES + UNIT-ECONOMICS SENSITIVITY

No invented total investment: define procurable work packages, then calibrate with pilot evidence

PENDING VERIFICATION CONCEPT

A | THREE PHASES, SEVEN PROCURABLE WORK PACKAGES



B | FIVE CONTINUE-ADJUST-EXIT GATES



C | UNIT OPERATING ACCOUNT: SEPARATE LINES



D | NORMALIZED SENSITIVITY EXAMPLE (INDEX, NOT PRICE)

	0.85 LOW PRICE	1.00 BASE PRICE	1.15 HIGH PRICE
0.70 LOW UTIL.	60	70	80
1.00 BASE UTIL.	85	100	115
1.30 HIGH UTIL.	110	130	150

The sensitivity table uses a base revenue index of 100 to show parameter relationships; it is not rent, fee, investment, payback or public-funding data. All numeric parameters require calibration from real pilots, procurement rules and operating contracts before decision use.

CALIBRATION PROTOCOL

- Monthly: utilization / billable hours / cases
- Quarterly: cost coverage / complaints / public value
- Annual: repeat / survival / continue-adjust-exit
- Prohibited: equity returns funding base debt service

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG Delivery + unit economics

NO DIA-07 · 2026-08-10 · EN

SCALE NTS

DATA CONCEPT / PENDING

dinglc2001 · Completed using Agent

DIA-05

URBAN AGENT: LEAST PRIVILEGE, HUMAN RELEASE + PUBLIC AUDIT

Every step from data intake to appeal closure has an owner, log and stop condition


PENDING VERIFICATION

CONCEPT

A | DATA CLASSES + ALLOWED PURPOSES




C | LEAST-PRIVILEGE EXECUTION STACK



D | ONE PUBLICLY VERIFIABLE AUDIT RECORD



B | MINIMUM PROTOCOLS FOR 3 HIGH-RISK SCENARIOS

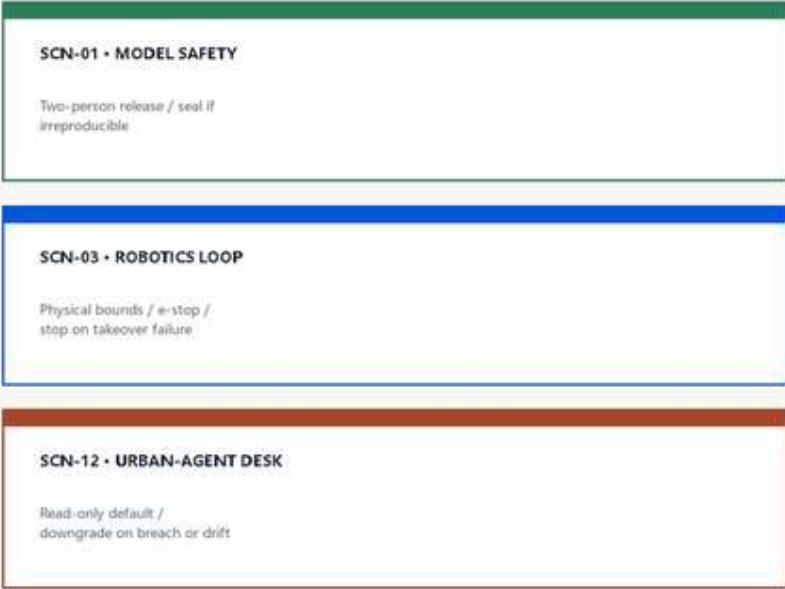

E | INCIDENT + APPEAL TIMELINE



SIGN-OFF AI CANNOT REPLACE

Fire / structure / accessibility / legal / procurement / ethics

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG Urban-agent governance protocol
NO DIA-05 · 2026-08-10 · EN
SCALE NTS
DATA CONCEPT / PENDING
dinglc2001 • Completed using Agent

This sheet defines a minimum governance protocol and does not claim deployment. The audit sample is a field template, not a live record.
High-risk actions are denied by default; named humans retain professional approval, public-service decisions and rights disposal.

Risk	Trigger	Control	Response
R1 Site safety	unverified structure/fire/load	professional sign-off before entry	stop works / equipment
R2 Public conflict	tests or events occupy passage	physical and time separation	e-stop / close scene
R3 Data and AI	over-collection or automated decision	minimum data, human release, appeal	read-only / delete / withdraw
R4 Rights	uncleared archive, mark or partner claim	rights register and written confirmation	remove content / name
R5 Operations	footfall without projects or service	catalogue, receipts and separate accounts	adjust programme / exit
R6 Finance	invented cost or unfunded maintenance	quantity first, inquiry second	no total / no expansion
R7 Inclusion	paywall, app-only or forced testing	offline equivalent and opt-out	restore service immediately

Days	Action	Decision evidence
01–15	survey brief, official-source register, stakeholder map	named baseline owner and E0/E1/E3 list
16–30	24-hour observation, accessibility walk, 20 interview types	problem/resource lists and conflict map
31–45	service catalogue workshop and three reversible prototypes	signed operators, public floors and stop gates
46–60	Z3 closed test, O1 clinic, O3 night school, D1 problem session	test, project, disturbance and demand receipts
61–75	cost inquiry and quantity source review	no-source items held out of total
76–90	public review, professional gate and next-stage decision	proceed / revise / stop record


MET-01

FIRST-PHASE DELIVERY • CONTRACT • ACCEPTANCE • EXIT

A reversible 90-day pilot turns the concept plan into verifiable delivery decisions

CONCEPT

DATA-DERIVED

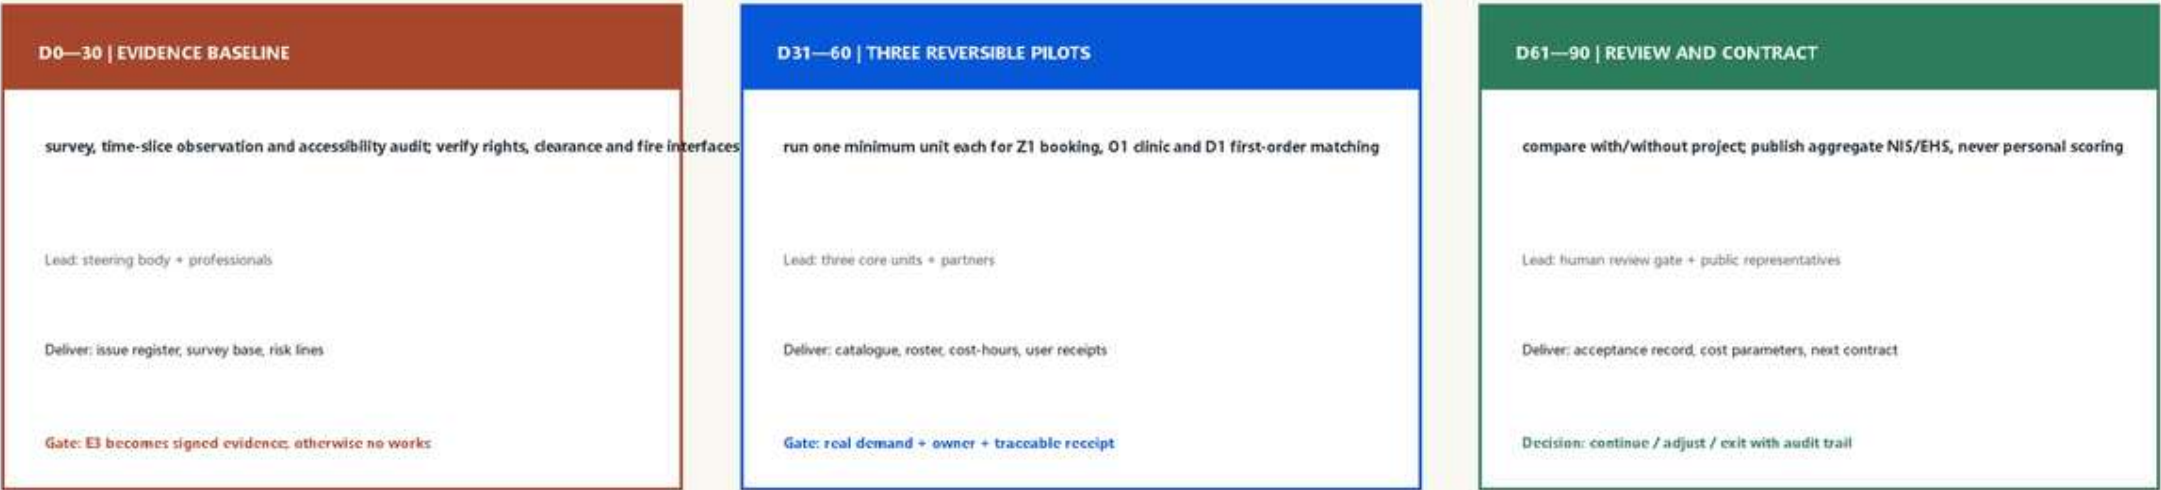

REPRESENTATIVE CONTRACTS (SAME FIELDS FOR ALL 15)




PUBLIC + AI SAFEGUARDS

anonymous passage · ≥2 resident seats · ≥20% affordable hours · accessibility sign-off · no service-for-data

AI only recommends and aggregates: human authorization, appeal, shutdown and audit log; no cleared baseline, no district score.

Provisional constraint only; not a statutory boundary, approval or area basis
Source: official package geometry/*.geojson and metrics.json (recomputed in EPSG:4548)

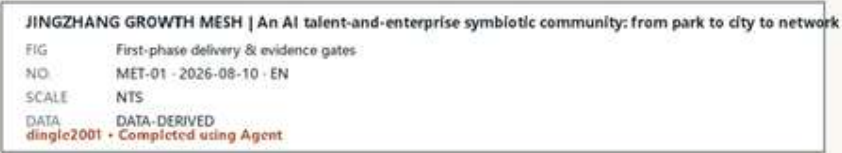

Source ID	Publisher	Use	Limit
OFFICIAL-JINGZHANG-PLANNING-2021	Beijing planning authority	9 km corridor, vertical relations, breaks, actors, phasing	Public interpretation; not statutory boundary
OFFICIAL-HAIDIAN-AI-BELT-2026	Haidian Government	37 km², three zones/two wings, 1–2 km interface	Text facts; no official polygon
OFFICIAL-HAIDIAN-AI-TESTBED-2026	Haidian Government	Origin talent/enterprise figures, testbed services	No participation or resource commitment implied
OFFICIAL-HAIDIAN-15FIVE-2026	Haidian Government	campus–park–neighbourhood and affordable open space	Policy direction, not funding approval
OSM-CONTEXT-20260813	OpenStreetMap contributors	static road, rail and place background	orientation only; ODbL
USER-REFERENCE-HEPINGJIE	Public project reference	project-book depth benchmark	no copied layout, data or asset
geometry/*.geojson	submission provisional data	working boundary, cores, uses and phases	not survey, title or statutory control

LM-00 IDENTITY, WAYFINDING GRAMMAR + THREE PUBLIC-KNOWLEDGE LANDMARKS

One rail-to-node grammar from logo to annual programs, with tiered use and reversible display

PENDING VERIFICATION NTS CONCEPT

MASTER-BRAND CONSTRUCTION

JINGZHANG GROWTH MESH

RAIL TRACE → NODE MESH

CLEAR SPACE ≥ 1 NODE | MIN 25 mm / 120 px | MONO VERSION ALLOWED

COLOR + GRAPHIC TOKENS

HERITAGE NAVY TECH BLUE RAIL RUST GROWTH GREEN EVIDENCE GOLD

LINE = RELATION | NODE = EVIDENCE | DASH = PROPOSED / PENDING

HIERARCHY + PROHIBITIONS

01 MASTER

02 3 CORE SUBBRANDS

03 WAYFINDING / HONOR

04 ANNUAL PROGRAMS

NO corporate lockup implying partnership / unverified names

THREE CORE SUBBRANDS + WAYFINDING GRAMMAR

Z | ZHONGZHI VALIDATE

LAB / EQUIPMENT / SAFETY

Z1

O | ORIGIN CO-CREATE

OPEN SOURCE / NIGHT SCHOOL / FAMILY

O1

D | DAZHONGSI FIRST ORDER

SERVICE / COMPLIANCE / CAPITAL / GLOBAL

D1

THREE PUBLIC-KNOWLEDGE LANDMARKS: RECORD EVIDENCE, NOT ADVERTISING

LM-1 OPEN-SOURCE MILESTONE

Public validation → license review → marker growth

USE GATE

AUTHORIZED + VERIFIABLE + REVERSIBLE

ANNUAL MAINTENANCE / TAKEDOWN

LM-2 CO-CREATION HALL + NODE WALL

Minimum collection / off switch / periodic node review

USE GATE

AUTHORIZED + VERIFIABLE + REVERSIBLE

ANNUAL MAINTENANCE / TAKEDOWN

LM-3 ENTERPRISE GROWTH RINGS

Anonymous aggregate of first order / funding / graduation

USE GATE

AUTHORIZED + VERIFIABLE + REVERSIBLE

ANNUAL MAINTENANCE / TAKEDOWN

ANNUAL PROGRAM SUBBRANDS

VALIDATION OPEN WEEK

MASTER LOCKUP + YEAR + EVENT-SPECIFIC PARTNER PERMISSION

ORIGIN DEVELOPER NIGHTS

MASTER LOCKUP + YEAR + EVENT-SPECIFIC PARTNER PERMISSION

FIRST-ORDER SEASON

MASTER LOCKUP + YEAR + EVENT-SPECIFIC PARTNER PERMISSION

REGIONAL DEVELOPER WEEK

MASTER LOCKUP + YEAR + EVENT-SPECIFIC PARTNER PERMISSION

All logos, wayfinding and landmarks are original conceptual graphics; trademark search, heritage approval, construction, structure and content clearance remain pending. Landmarks record authorized, verifiable and withdrawable contributions only; they are not company ratings, investment advice or government endorsement.

JINGZHANG GROWTH MESH | An AI talent-and-enterprise symbiotic community: from park to city to network

FIG Identity, wayfinding + landmarks

NO LM-00 - 2026-08-10 - EN

SCALE NTS

DATA CONCEPT / PENDING

dingic2001 + Completed using Agent

FROM A CORRIDOR TO AN OPERATING ECOSYSTEM

The proposal is not a catalogue of attractive spaces. It is a chain from official evidence to the health check, from problems to 15 project contracts, and from delivery to continuous operation, review and exit.

NO HEALTH CHECK, NO RENEWAL. NO EVIDENCE, NO SCALE.