

JINGZHANG GROWTH MESH

An AI talent and
enterprise community
from park to city to
network



Originality: difference • tests • reuse

Four failure tests constrain a district-adaptable evidence-to-project protocol.

CORE-00ORIGINALITY ANATOMY: NEITHER PARK RECRUITMENT NOR A CITY DASHBOARD

DATA-DERIVED

CONCEPT

PENDING VERIFICATION

A | TESTABLE DIFFERENCE FROM COMMON APPROACHES

CONVENTIONAL PARK

space → recruitment → events → occupancy

Risk: firms arrive but may not grow locally

CONVENTIONAL SMART CITY

sensors → platform → score → management

Risk: visible data is not a deliverable project

JINGZHANG ORIGINAL COMBINATION

health evidence → lists → contract → bounded pilot → entity reproduction

Difference: unknowns create surveys; AI cannot self-sign; failure steps back

B | FOUR FALSIFICATION TESTS: ONE FAILURE BLOCKS THE CLAIM

F1 EVIDENCE

Missing baseline still creates a construction project

FAIL → SURVEY

F2 POWER

An agent can self-sign, procure or dispose rights

FAIL → HUMAN TAKEOVER

F3 PUBLIC

Pilot closes non-AI service or crowds out affordable hours

FAIL → VETO RELEASE

F4 EFFECT

No net gain versus comparator, or harm/group gaps rise

FAIL → NO SCALE / EXIT

C | PORTABILITY: FIXED KERNEL + LOCAL ADAPTERS

INPUT

E0/E1/E3 evidence + local charter

FIXED KERNEL

six agents + four human gates + non-deprivation comparison

LOCAL ADAPTER

industry, heritage, geometry, regulation and service floor

OUTPUT


survey tasks, conflicts, contracts and sign-off/dissent/exit logs

The originality claim is limited to the method combination and auditable protocol; cases provide components, not proof of outcomes.

CORE-00 | PROVISIONAL / CONCEPT / NTS | dingle2001 • COMPLETED USING AGENT

Multi-agent urban-renewal control plane

AI planning value is not faster imagery; it makes evidence, project contracts, public safeguards and exit decisions traceable.

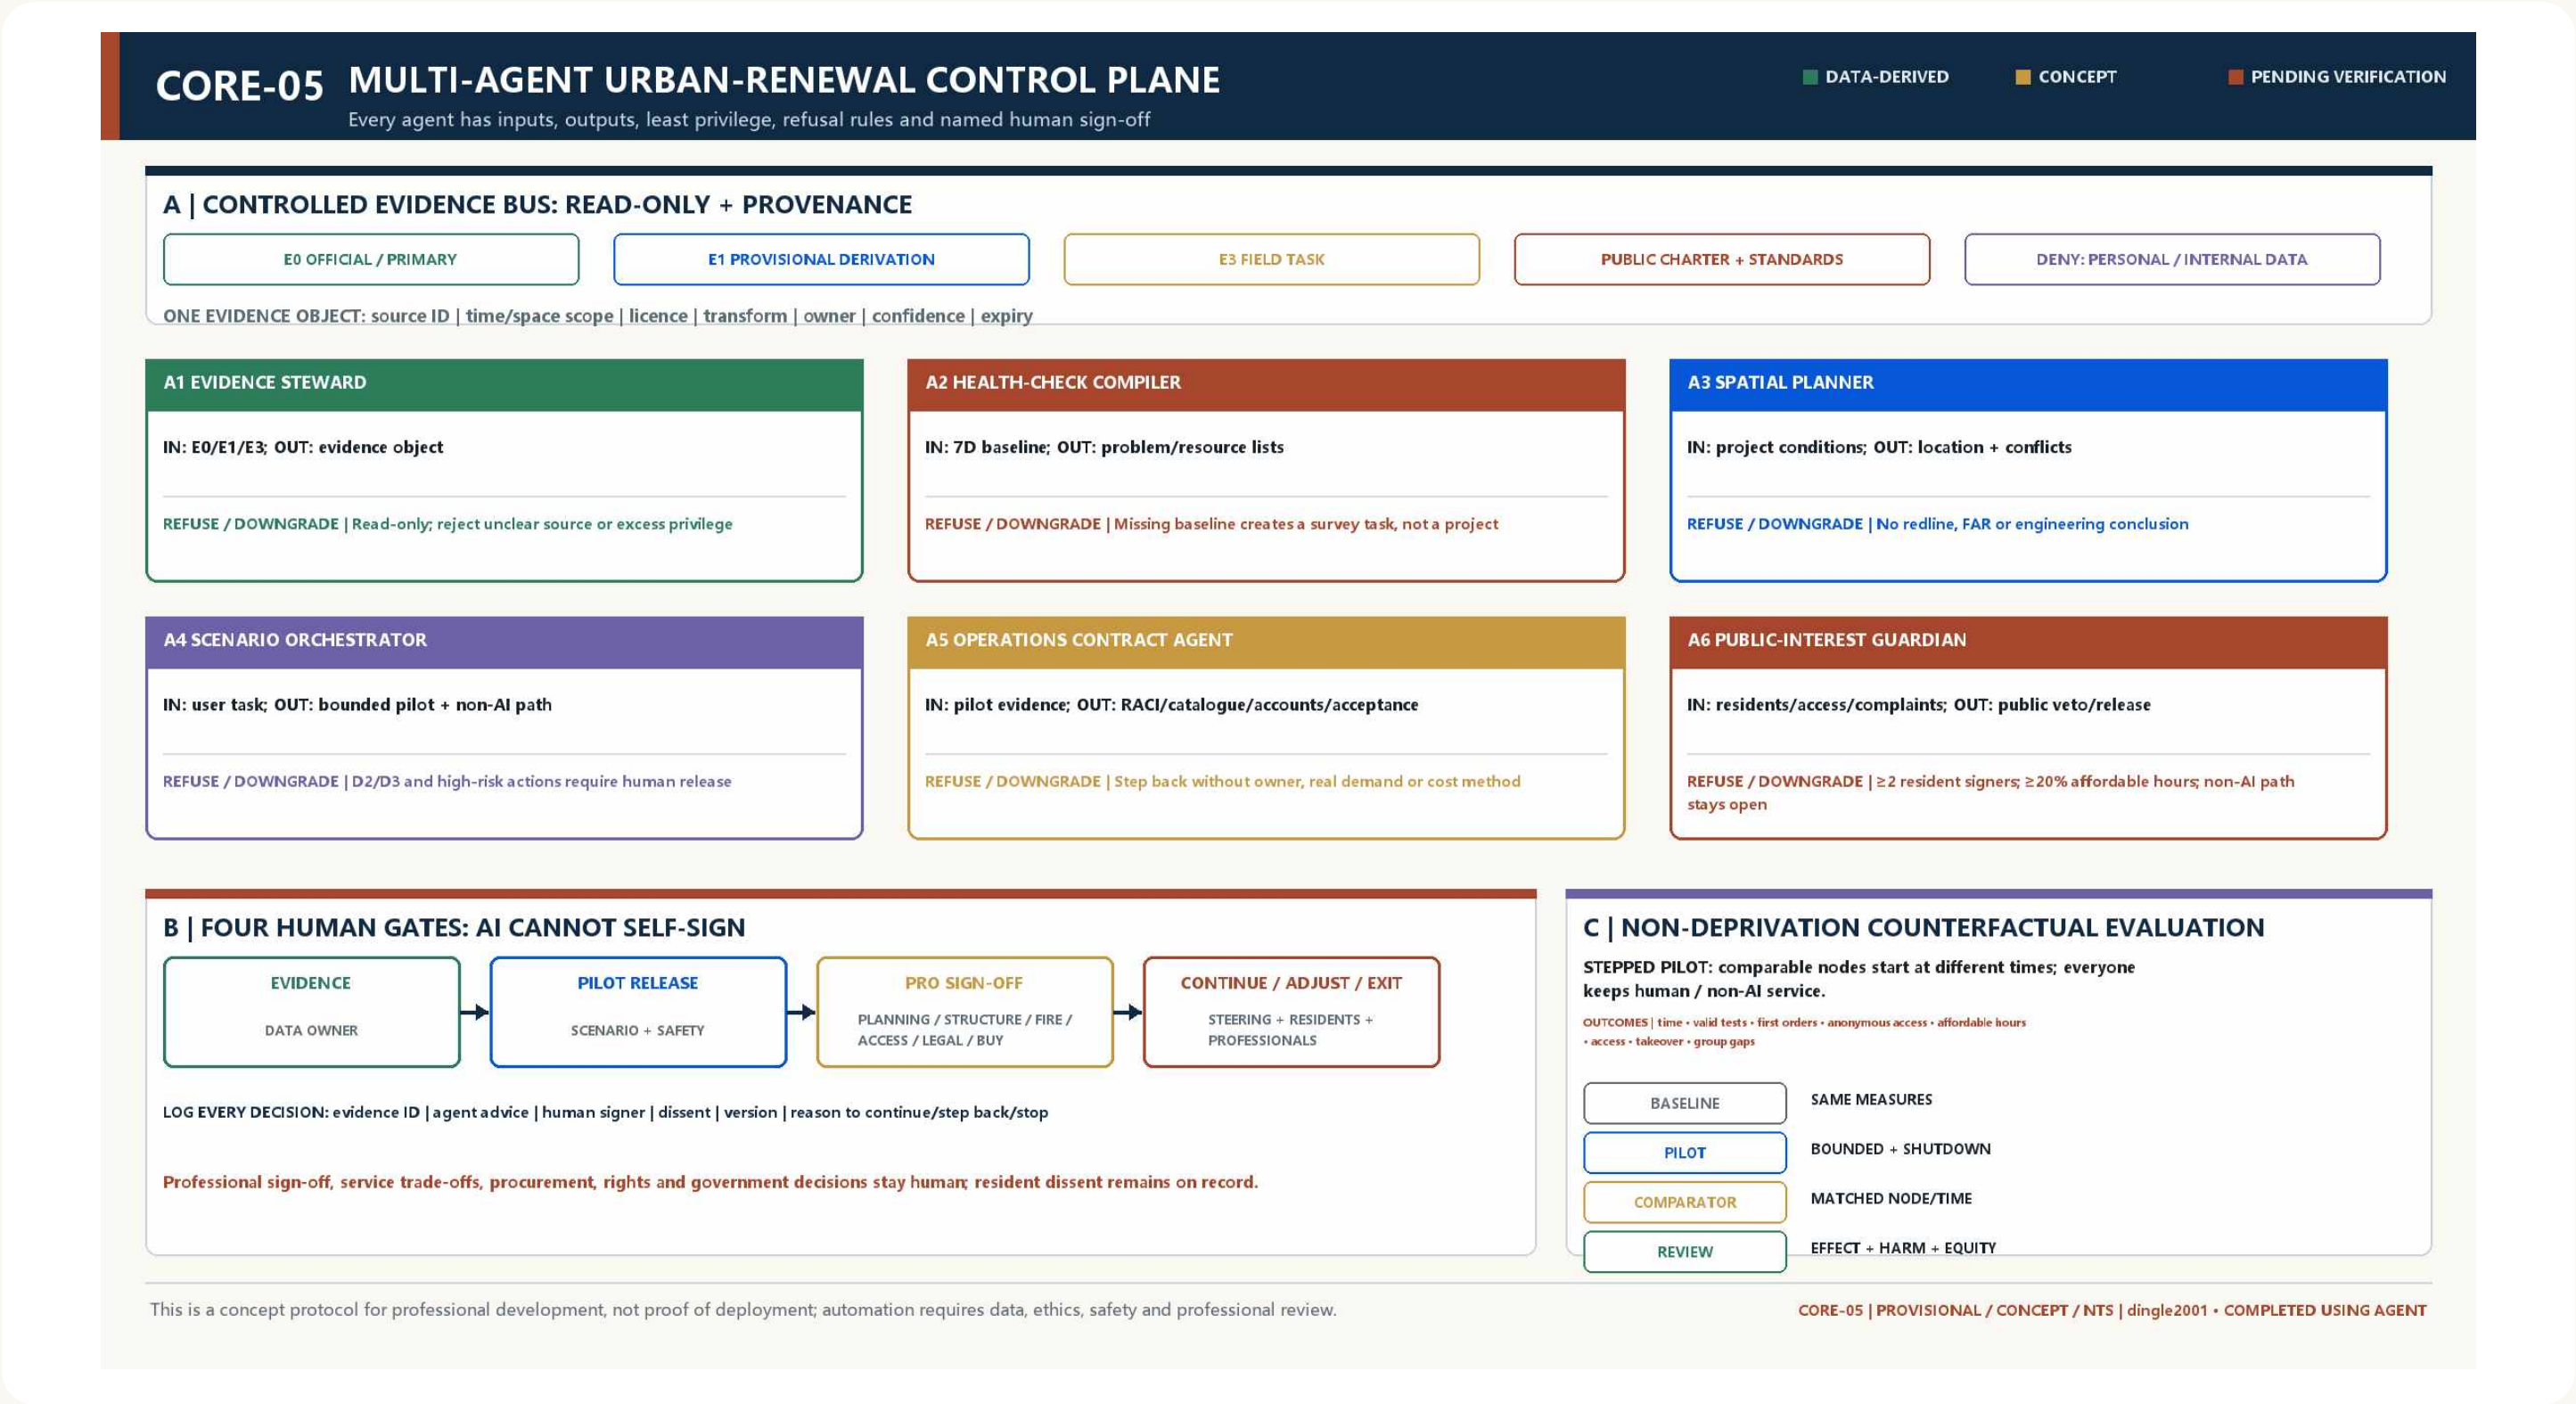

Evidence-first reading

Every claim maps to space, ownership, evidence, a stop condition and an unknown.

Known Provisional geometry, concept ratios and object counts	Unknown Structure, fire, rights, demand, investment and approval
Proposed Spatial prototypes, operating protocols, portfolio and phasing	Decision Continue, adjust, step back or exit; no baseline, no score

No baseline, no score · named owner · acceptance evidence · continue / adjust / step back / exit

Six official-agent tasks

Positioning, ecosystem, scenarios, public realm, culture and operations each have direct evidence.

agent.1

Concept and identity

agent.2

Ecosystem and key areas

agent.3

12 scenarios and 7 personas

agent.4

Heritage park, landmarks, honor and components

agent.5

Rail-Zhongguancun-AI culture

agent.6

Programs, community and international conversion

Structure and facility safety

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Measured survey, structural appraisal, equipment loads, envelope and utility register

Current diagnosis

Current layers identify stock objects but do not prove safe equipment loads or public opening.

Problem list

Pending list of critical, restricted and serviceable assets

Resource list

Large spans, reversible interfaces, existing MEP and reusable components

Project trigger

Triggers Z1, Z2 and the WP0 baseline package

Stop gate

No permanent works or equipment move-in without professional sign-off

Fire and operational safety

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Fire compartments, egress, water, electrical, hazardous use and event-capacity checks

Current diagnosis

Labs, night school, public opening and robotics overlap without an approved operating basis.

Problem list

Pending fire gaps, opening windows and shutdown conditions

Resource list

Zoned operation, bounded tests, staffed oversight and closable public edges

Project trigger

Triggers Z3, Z5, O3 and scenario safety protocols

Stop gate

No opening without egress, insurance, e-stop and named accountability

Heritage and place value

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Relic survey, age/value appraisal, view corridors, component and archive rights

Current diagnosis

The rail axis has strong narrative potential, while components, dates, display rights and grades remain unverified.

Problem list

Pending protect, repair, display, no-entry and reuse lists

Resource list

Rail trace, industrial memory, continuous public realm and Zhongguancun innovation history

Project trigger

Triggers heritage axis, landmarks, wayfinding and annual curation

Stop gate

Survey before design; uncleared content stays off walls and digital channels

Rights and governance conditions

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Land/building rights, leases, permits, management limits, stakeholders and claims

Current diagnosis

Provisional polygons cannot replace rights or management limits; opening, maintenance and revenue duties are unsettled.

Problem list

Pending conflicts, duty gaps, negotiation and approval lists

Resource list

Owners, district operator, universities, firms, advisers and resident network

Project trigger

Triggers owner confirmation and the one-map/two-table/six-list package for all projects

Stop gate

No implementation-library entry without named coordinating, delivery, operating and accepting parties

Industry-space fit

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Enterprise lifecycle, spatial demand, equipment, service gaps, affordability and alternatives

Current diagnosis

Haidian has strong innovation sources but weak validation-incubation-first-order interfaces; office supply is not industry service.

Problem list

Pending real demand, spatial thresholds, service breaks and alternatives

Resource list

Universities, leading firms, open-source communities, test facilities and professional services

Project trigger

Triggers Z1-Z4, O1-O3 and D1-D5

Stop gate

No construction investment without a problem owner, real users and operating brief

Access and continuity

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Transit exits, walking/cycling, crossings, accessibility, loading, emergency and time conflicts

Current diagnosis

The north-south spine has continuity potential; east-west links, portals, accessibility and test flows need field checks.

Problem list

Pending breaks, conflicts, detours, service gaps and time windows

Resource list

Linear park, transit portals, two wings and time-shared routes

Project trigger

Triggers Z3, SCN-08, Xiaoyuehe wing and WP1 public base

Stop gate

Tests and events may not occupy anonymous passage, accessible or emergency routes

Public realm, ecology and inclusion

No health check, no renewal: unknowns become investigation and sign-off tasks, never invented scores.

Required baseline

Green-blue systems, comfort, stormwater, lighting, stay, all-age use, opening and maintenance survey

Current diagnosis

Public space can be innovation infrastructure, but comfort, inclusion, maintenance and tech opt-out lack baselines.

Problem list

Pending ecological gaps, use conflicts, service deficits and maintenance duties

Resource list

Heritage park, Xiaoyuehe, families, open ground floors and public programs

Project trigger

Triggers Z5, O4, O5, SCN-07-09 and the component library

Stop gate

Public service cannot depend on data consent; no facility expansion without maintenance funding

Problem/resource/project/policy lists

The four lists map item by item; a broken mapping means diagnosis or resource work is incomplete.

Problem

Symptom, object, place, time, urgency and cause

Resource

Space, organization, culture, ecology, finance and policy

Project

Boundary, owner, action, output, result and metric

Policy

Planning, land, approval, funding, oversight and exit

Health-check-to-project compiler

Locate—trace cause—inventory—compare tools—define contract—stage by maturity.

Opportunity

Initial problem-resource match

Reserve

Boundary, owner and initial account explainable

Implementation

Plan, funding, operation and acceptance organizable

Annual plan

Milestones, owners and prerequisites schedulable

Step back


Insufficient rights, funding, public value or evidence

Exit

Planning conflict, uncontrolled risk or no durable demand

Location and regional collaboration


The location dividend is interface, not land; proposed nodes do not imply participation.

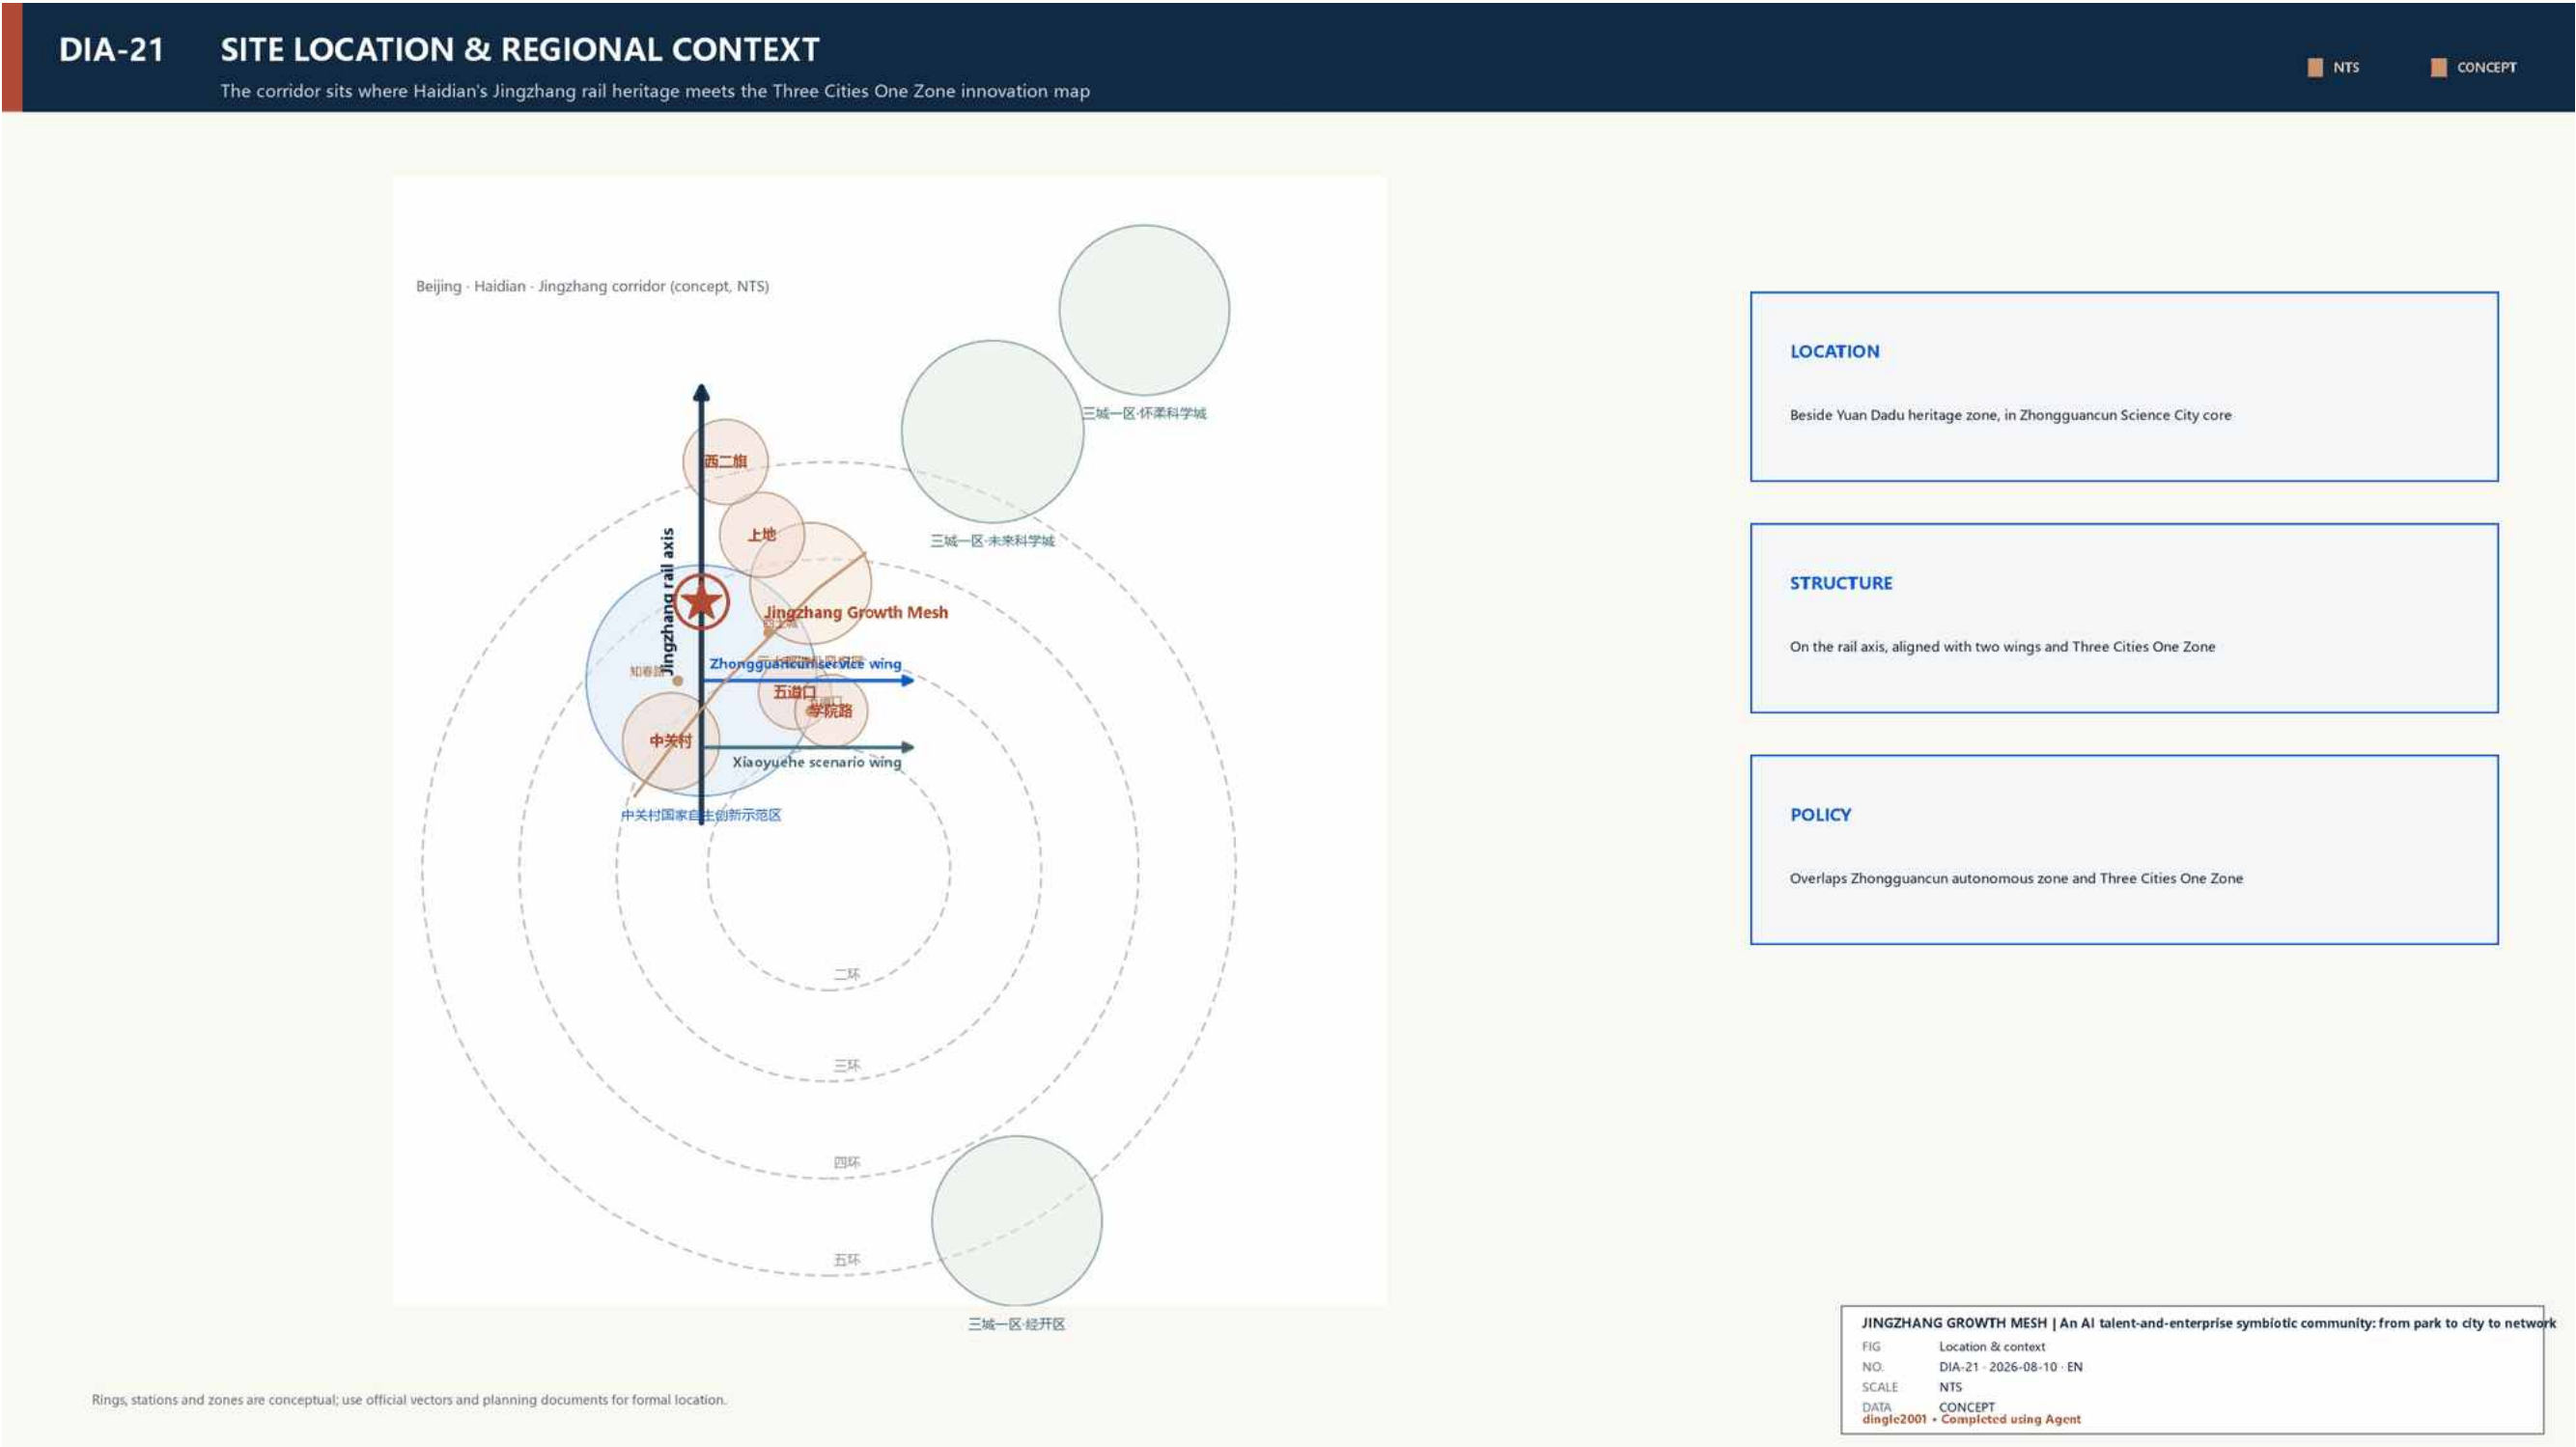

Rings, stations and zones are conceptual; use official vectors and planning documents for formal location.

Strategy: inherit • connect • grow • govern

Inherit is the base, connect the skeleton, grow the engine, govern the safeguard.

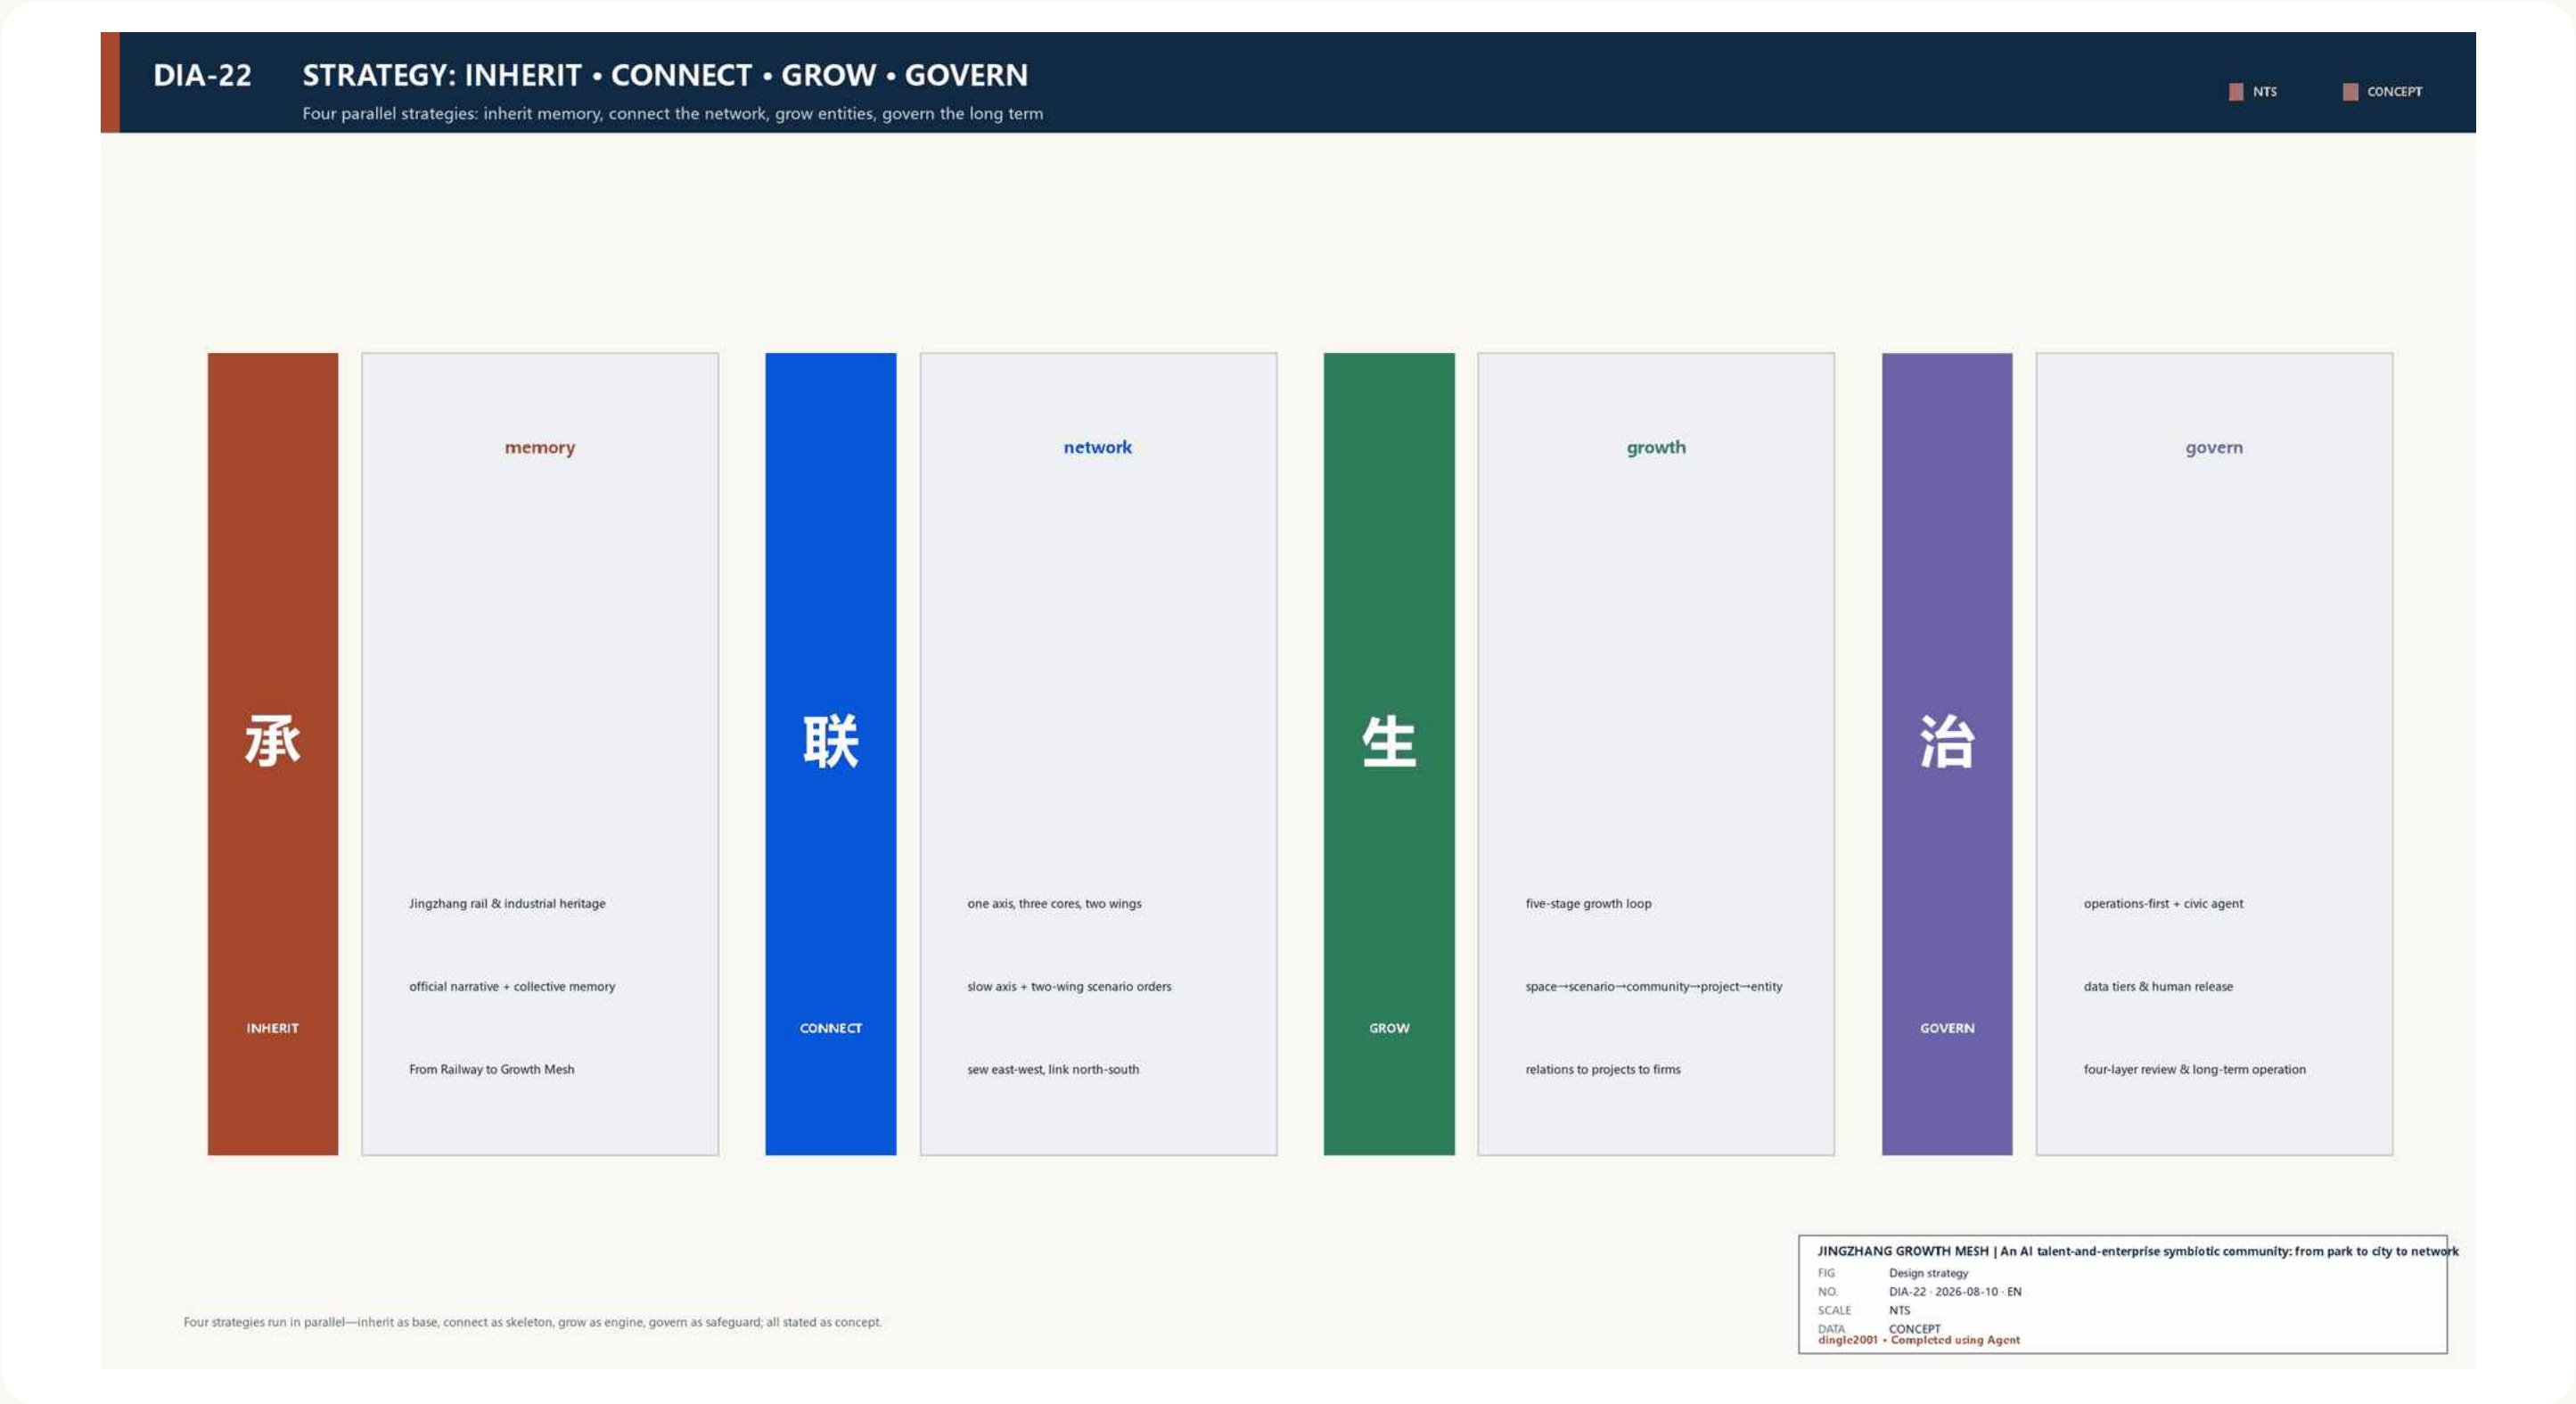

One axis, three cores, two wings

Validation north, incubation central, conversion south; two wings provide services and public scenarios.



Three scopes and site evidence

Coordinated study, overall design and key areas form one strategy-to-delivery chain.

CORE-01 SITE DIAGNOSIS, BRIEF ALIGNMENT + REGIONAL SYNERGY

Three provisional scales; mechanisms, owners and interfaces can be tested first

DATA-DERIVED

CONCEPT

PENDING VERIFICATION

A | THREE GEOMETRY-DERIVED SPATIAL SCALES

COORDINATED 43.6 km²

OVERALL 11.4 km²

KEY AREAS 368.4 ha

B | 3 POSITIONS × 5 FUNCTIONS × 6 TASKS

CENTENNIAL JINGZHANG CULTURE

URBAN AI LIFE EXPERIENCE

AI CONVERGENT INNOVATION

FULL-STACK

ECOSYSTEM

SCENARIOS

VITAL CITY

GOVERNANCE

MASTER

ECOSYSTEM

SCENARIOS

PUBLIC REALM

CULTURE

OPERATION

Evidence: masterplan / ecosystem / 12 scenarios / public realm / identity / annual operation

C | NO HEALTH CHECK, NO RENEWAL: 7D BASELINE TO PROJECT LIBRARY

STRUCTURE

FIRE

HERITAGE

RIGHTS

INDUSTRY

ACCESS

PUBLIC/ECO

CHECK

LISTS

LIBRARY

DELIVERY

OPS-FIRST

REVIEW

UNKNOWN

SURVEY TASK

SIGN-OFF

CONTINUE / STEP BACK / EXIT

No baseline, no score. Unknown structure, fire, rights, demand, investment or approval becomes a named task and stop gate.

D | ORIGINAL COMBINATION + EVIDENCE BOUNDARY

ORIGINAL

3-core division + 7 gates + public-value return

DERIVED

Ratios only from provisional GeoJSON

PROPOSED

Links, projects, gates, programs and landmarks

PENDING

Boundary, rights, structure, fire, utilities and finance


All three scales are provisional; official polygons, areas, rights and statutory controls require organizer and professional verification.

CORE-01 | PROVISIONAL / CONCEPT / NTS | dingle2001 • COMPLETED USING AGENT

Concept / NTS / pending official boundary, survey and professional verification


Five-stage growth loop

Space release—scenario insertion—community aggregation—project generation—entity reproduction.

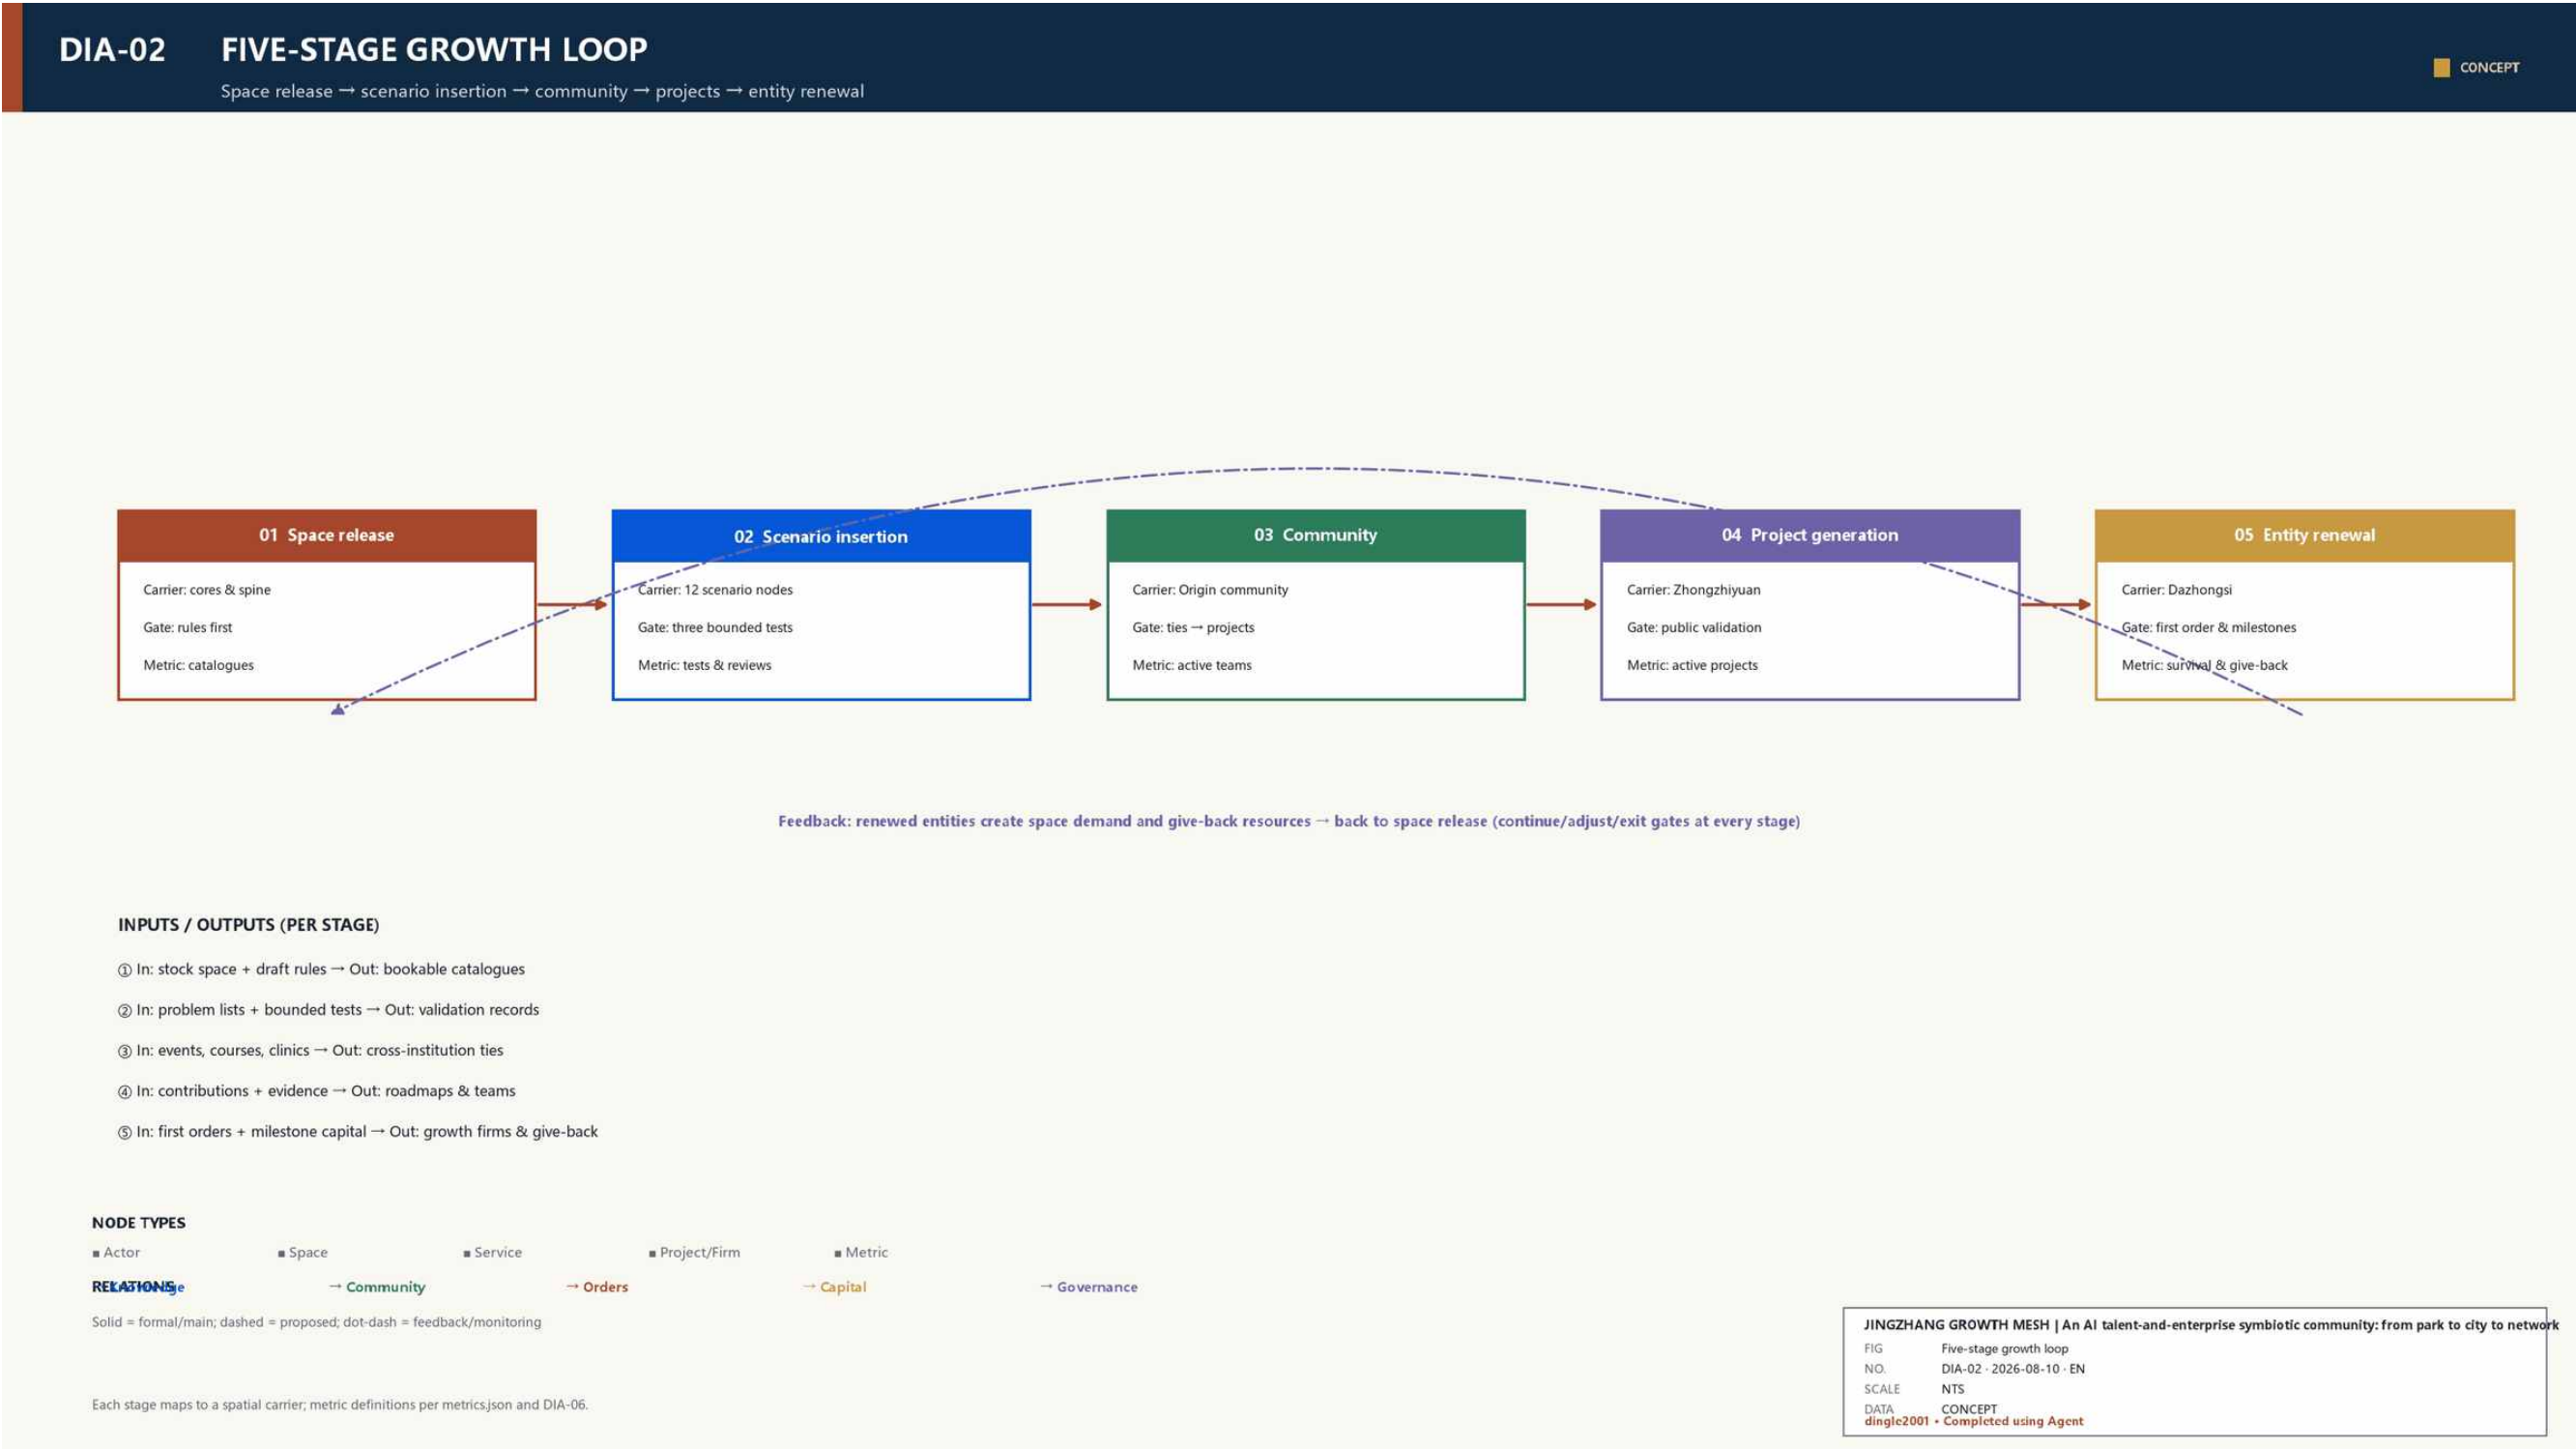

Anchor-community-enterprise network

Convert talent relations into projects and projects into durable entities.

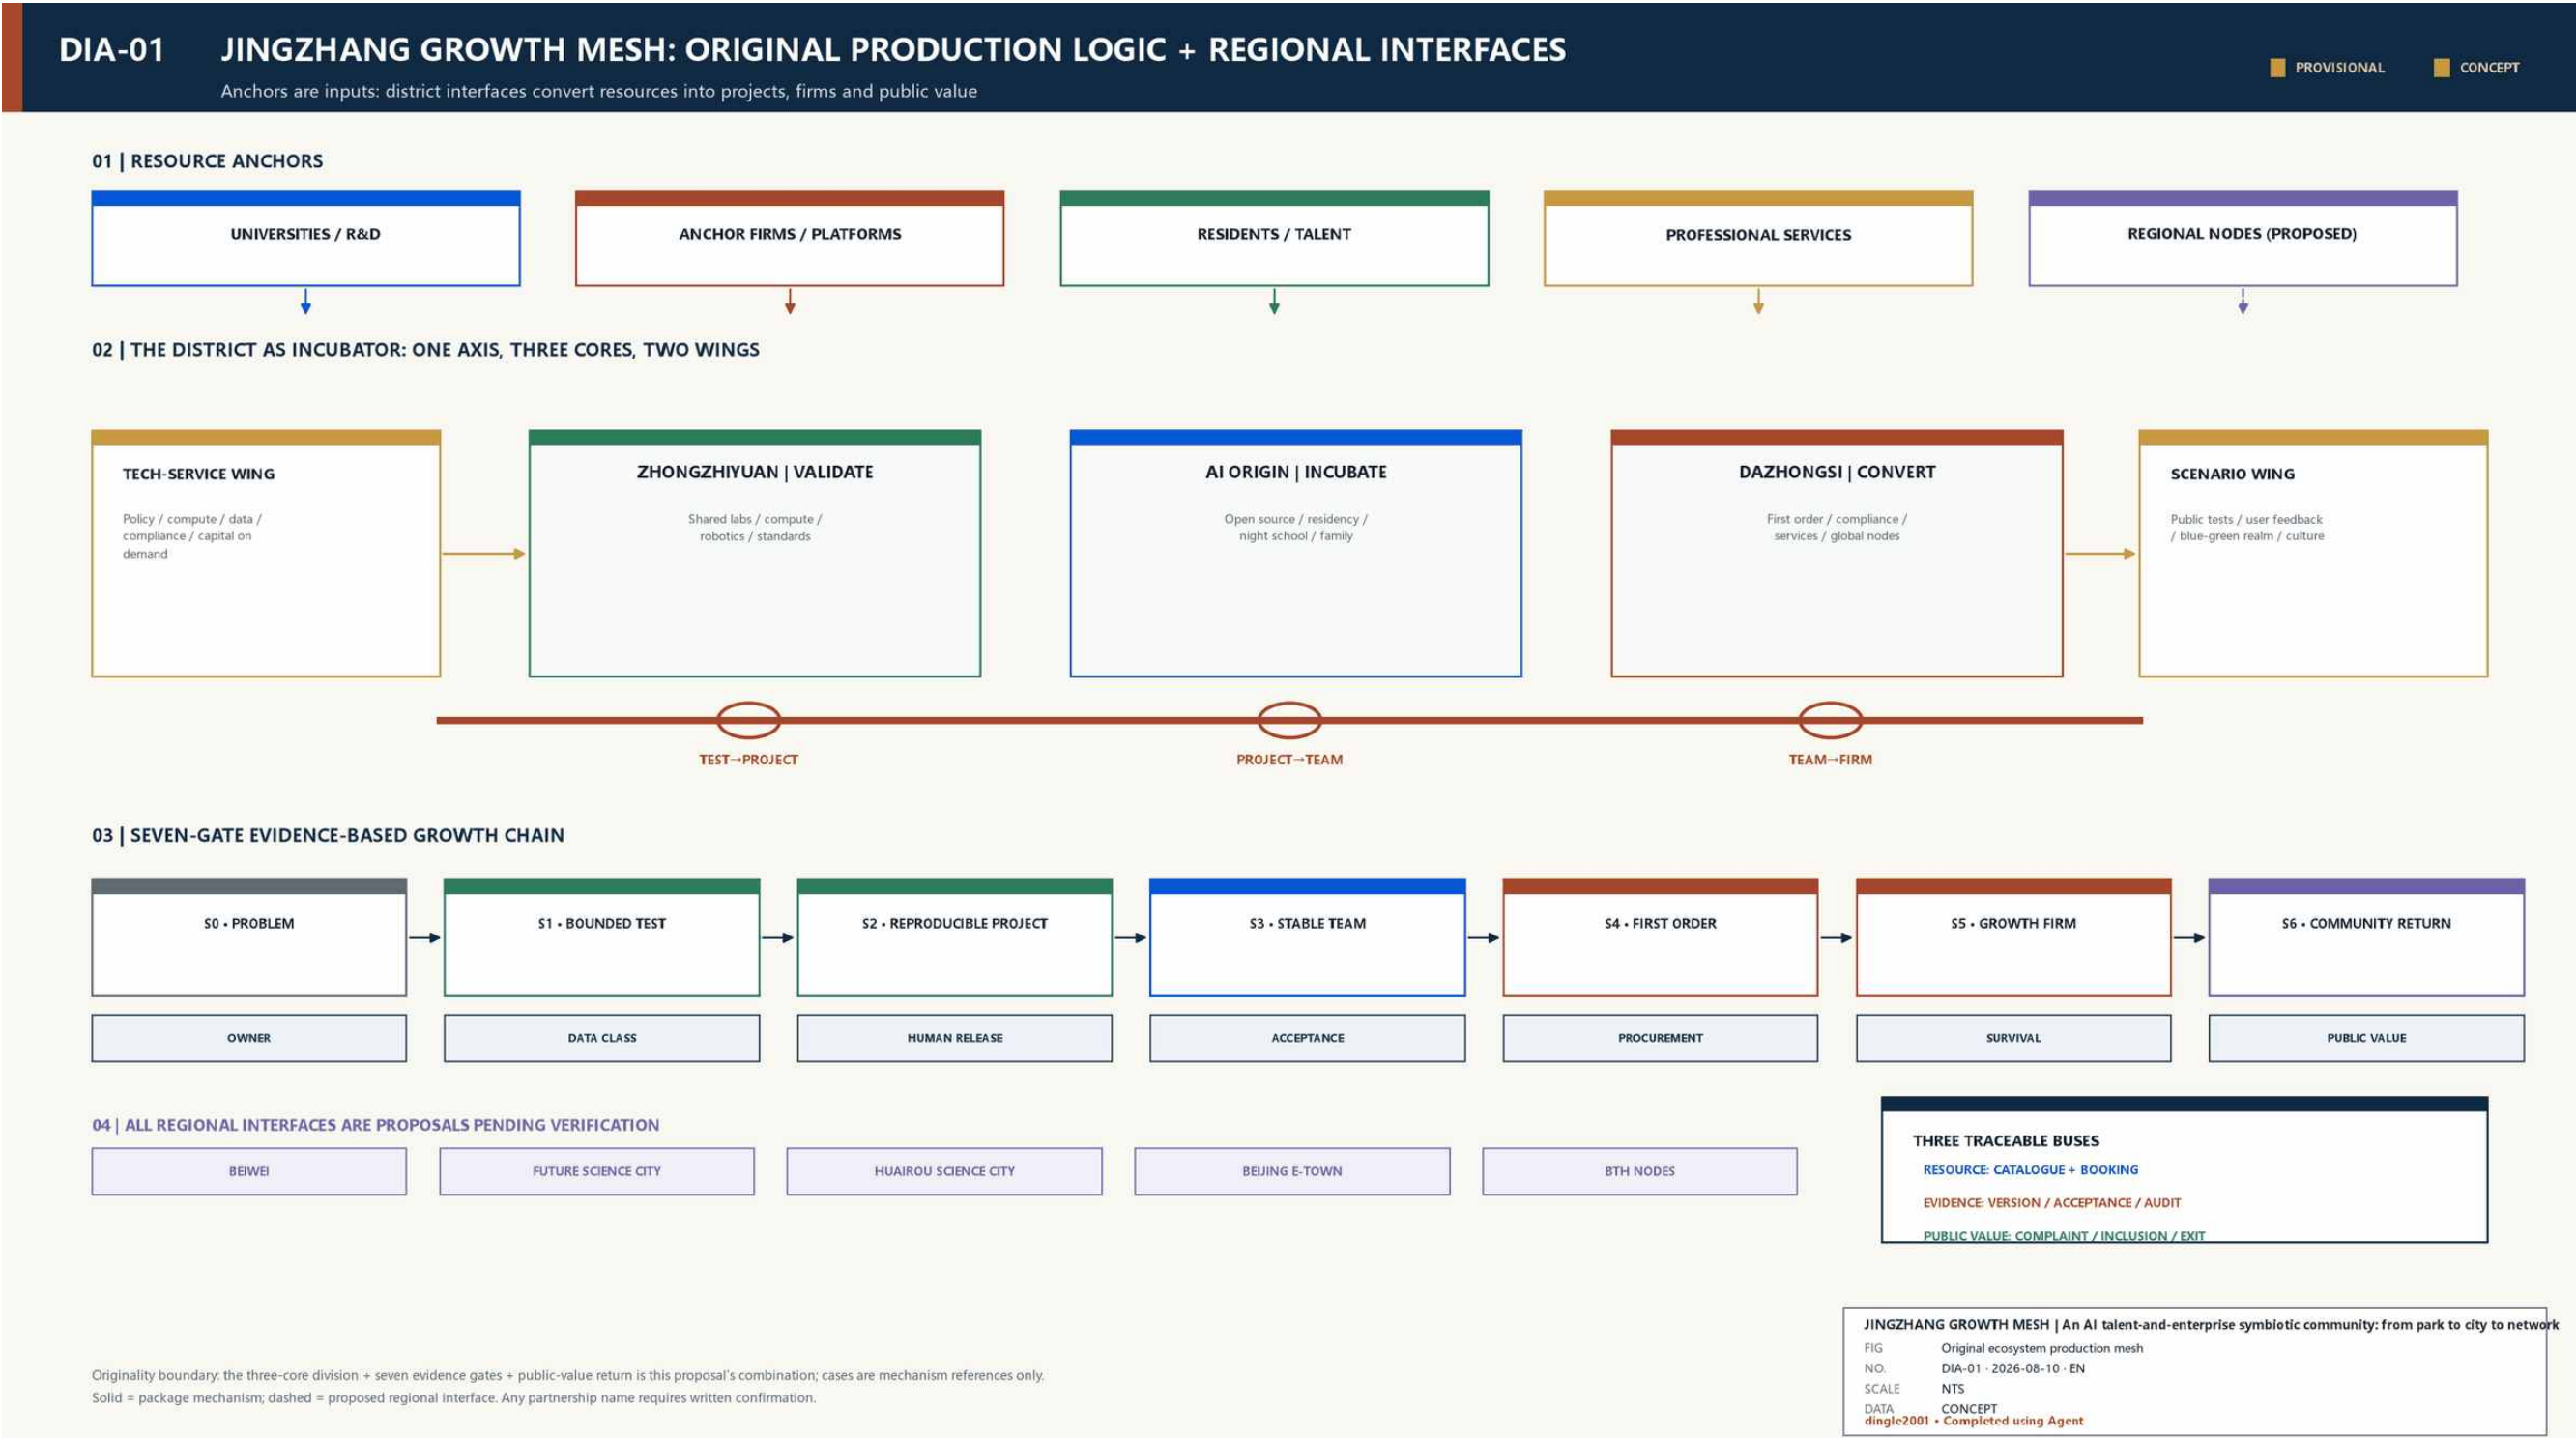

Mobility, blue-green and public scenarios

The heritage park is the ecosystem's public living room; anonymous passage and accessibility come first.

CORE-04 MOBILITY-BLUE/GREEN, 12 SCENARIOS + 7-PERSONA JOURNEYS

Every scenario binds space, operator, data class, human release, failure exit and public value

DATA-DERIVEDCONCEPTPENDING VERIFICATION

A | HERITAGE SPINE, BLUE-GREEN REALM + 12 SCENARIO NODES

SCENARIO TYPE

- Industrial
- Communi
- Human se
- Commerc
- Governan

ECOLOGICAL DI

- Storm-water reter
- Green continuity I
- No survey; no ecc

Concept green 12

3 INDUSTRIAL TESTS

3 INCUBATION

3 HUMAN SERVICES

3 CONVERSION/GOV

B | FOUR SCENARIO FAMILIES + RISK GATES

INDUSTRIAL TESTS SCN-01-03

D2/D3 | safety sign-off + e-stop

INCUBATION SCN-04-06

D0/D1 | license review + human clinic

HUMAN SERVICES SCN-07-09

Minimum collection | independent exit

CONVERSION/GOV SCN-10-12

Read-only default | compliance + appeal

Triggers: privilege breach / drift / takeover failure / complaint cluster → downgrade, pause or exit

C | 7 PERSONAS: ENTER-CO-CREATE-TEST-CONVERT-FEEDBACK

	DISCOVER	ENTER	CO-CREATE	TEST	FIRST ORDER	GROW	FEEDBACK
RESEARCHER	●	●	●	●			
INDEPENDENT DEV	●	●	●	●	●		
STARTUP TEAM	●	●	●	●	●	●	
GROWTH FIRM		●	●	●	●	●	●
SERVICE / INVESTOR			●	●	●	●	●
RESIDENT FAMILY				●	●	●	●
OPERATOR / GOVERNANCE					●	●	●

Common breaks: unclear entry / unsafe night route / care conflict / no exit after failed test

D | PUBLIC-VALUE RELEASE GATES

ACCESS

Professional check before opening

CO-GOV

Proposed ≥2 resident seats

AFFORDABLE

Proposed ≥20% free/low-cost hours

APPEAL

Proposed 2-day ack / 10-day closure

EXIT

Independent exit for vulnerable users

Scenarios are bounded tests or operating proposals, not proof of maturity, approval or permission to collect personal data; named humans release high-risk actions.

CORE-04 | PROVISIONAL / CONCEPT / NTS | dingle2001 • COMPLETED USING AGENT

Concept / NTS / pending official boundary, survey and professional verification


Zhongzhiyuan | concept view

Shared validation city: lab spine, test loop, standards court and public science edge.



Zhongzhiyuan | sections and flows

Grids, datums, dimensions, lineweights and safety zoning remain concept/NTS/pending verification.

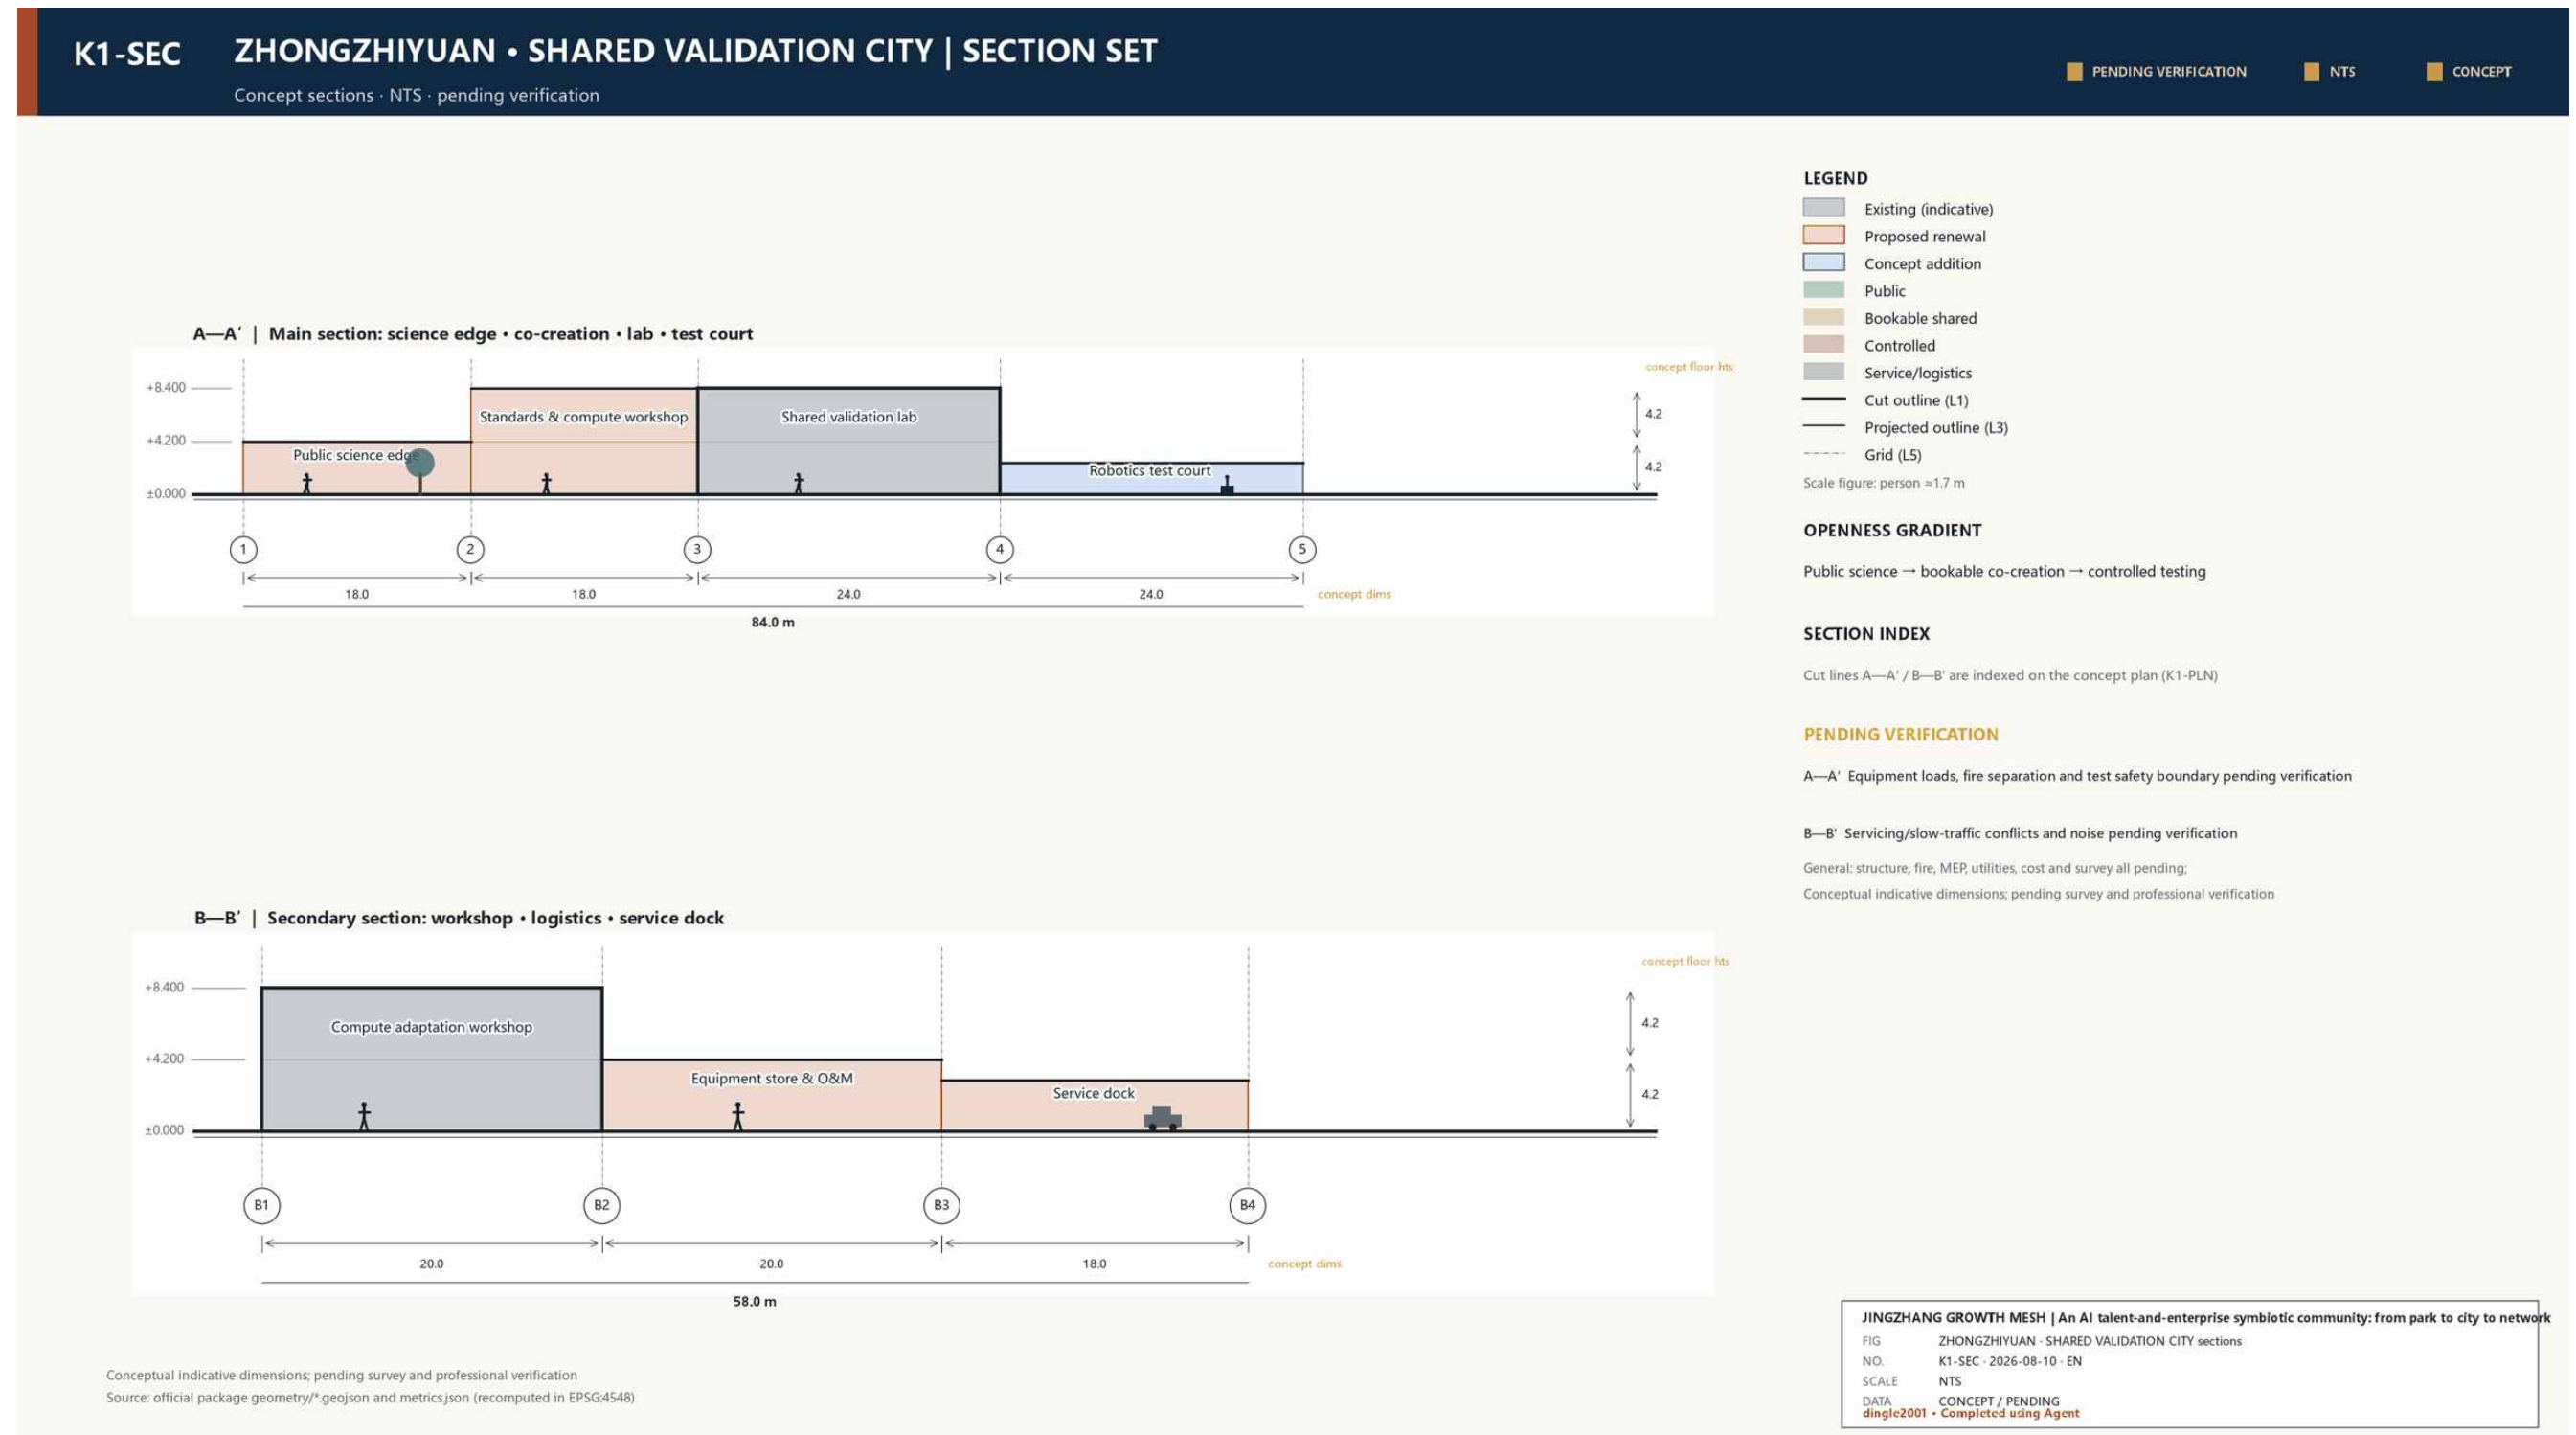

AI Origin | concept view


A time-shared talent community: transfer by day, co-creation at night, public weekends.



Dazhongsi | concept view

First order, enterprise services, compliance and capital form an open civic interface.

VP-04 Dazhongsi first-order street

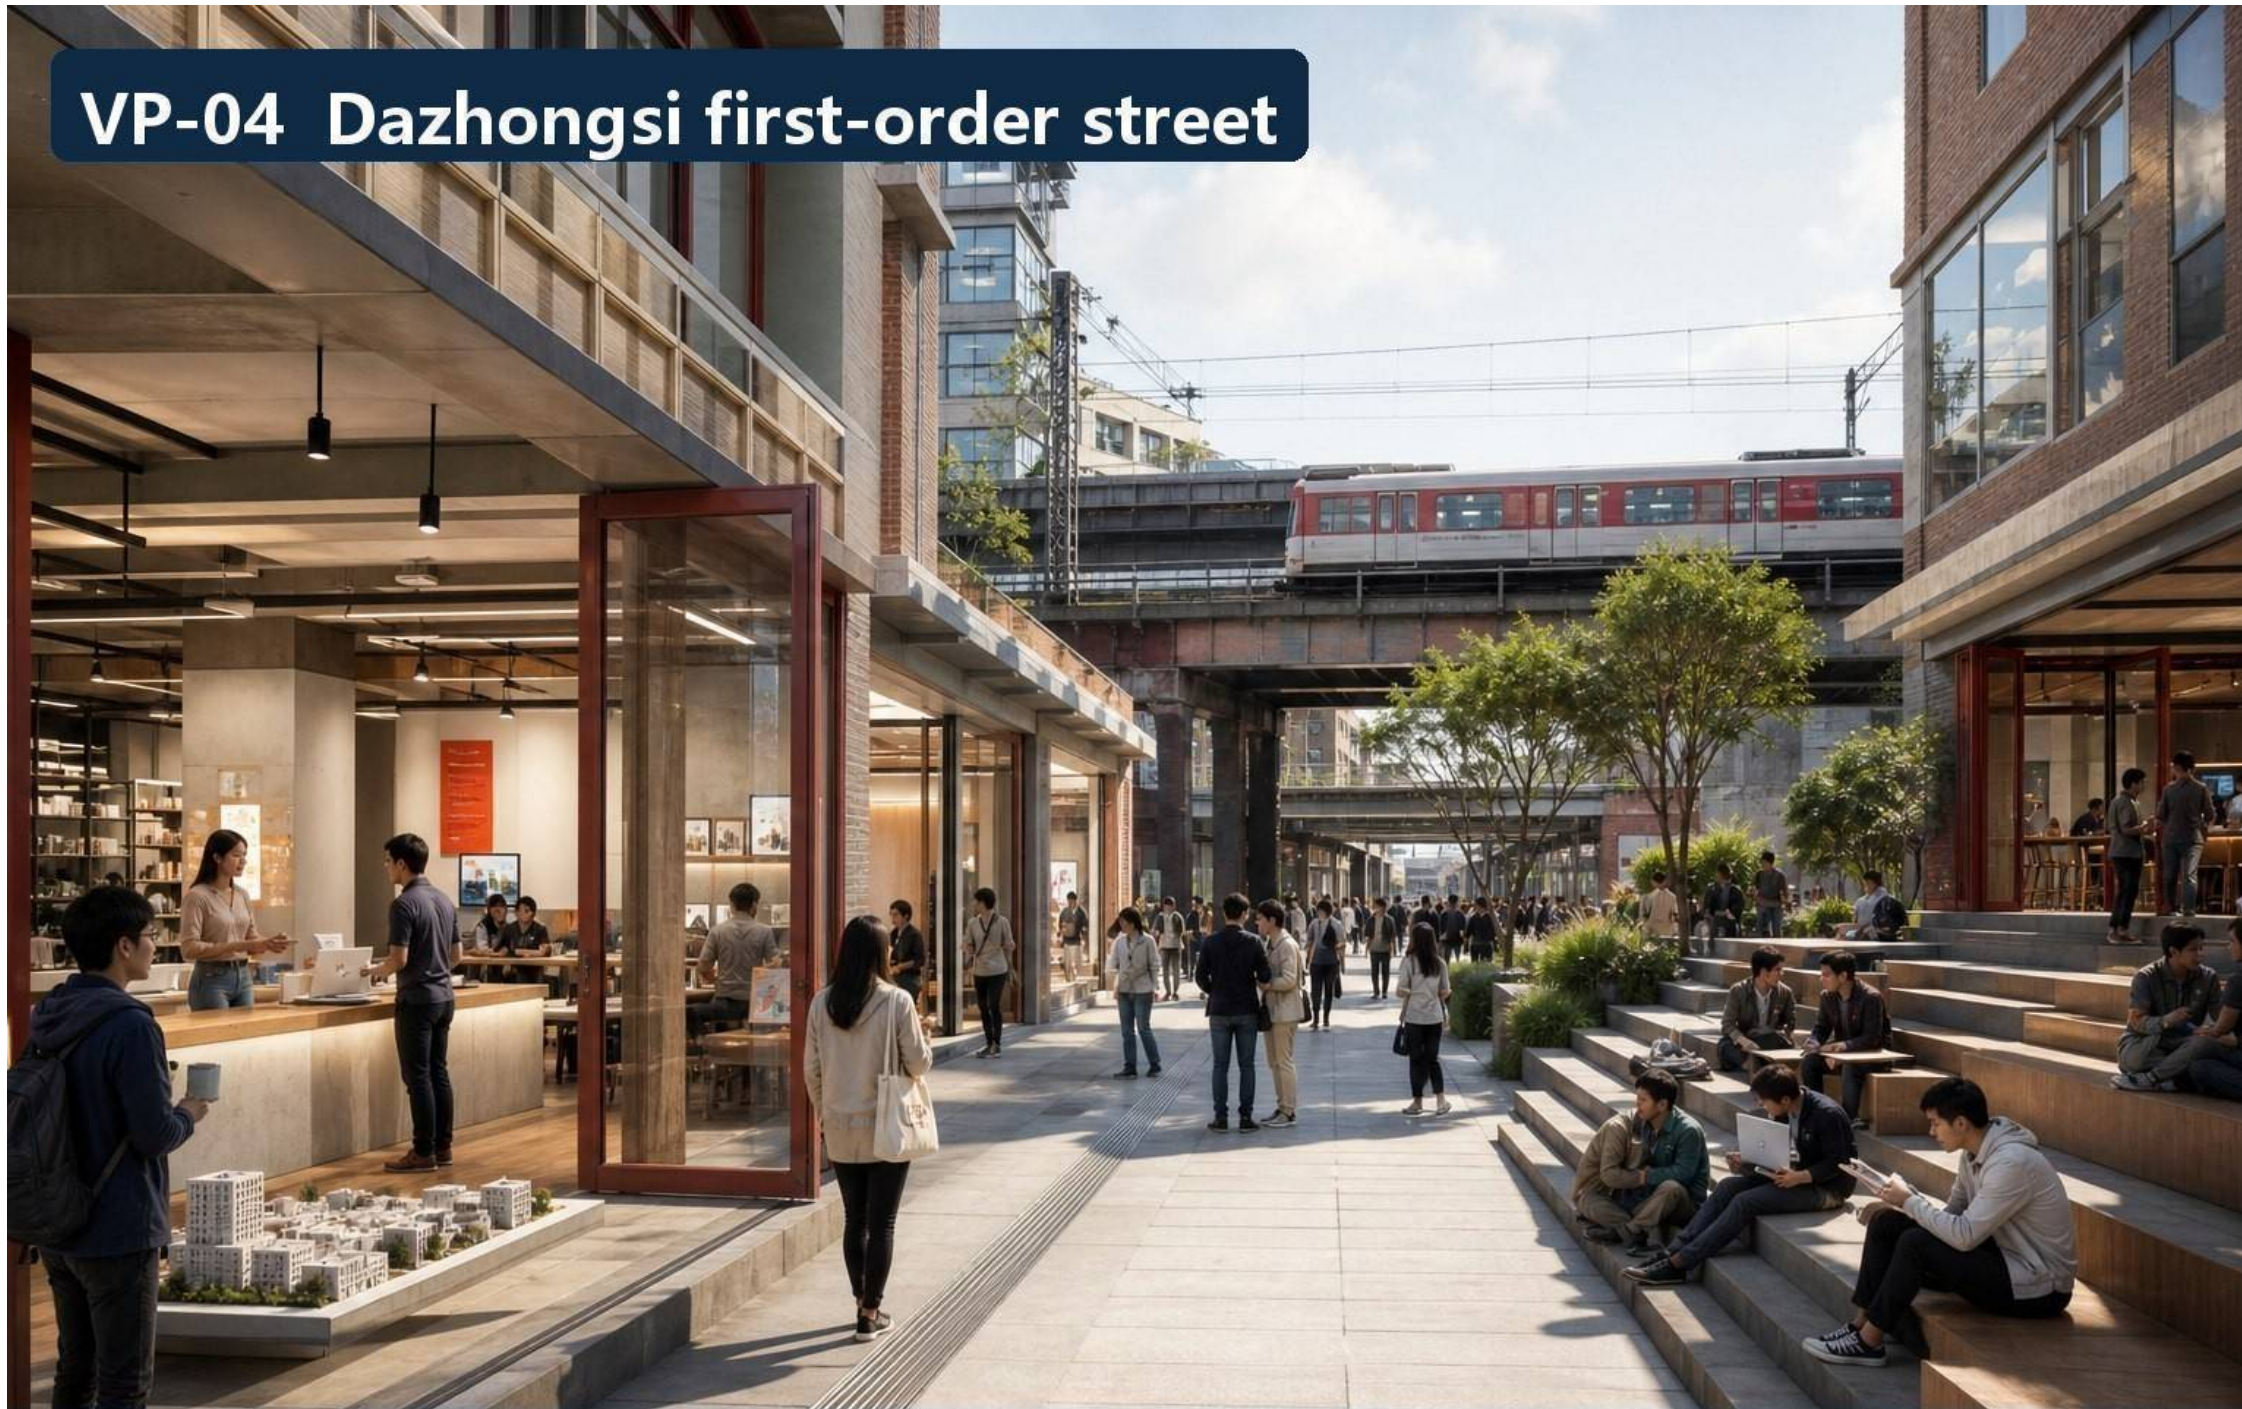


AI CONCEPT VIEW | VIEW-MAP | NOT BOUNDARY / FABRIC / ENGINEERING / INVESTMENT EVIDENCE

Completed using Agent

Dazhongsi | sections and first-order flow

Display—service—milestone—professional support form a flexible civic sequence.

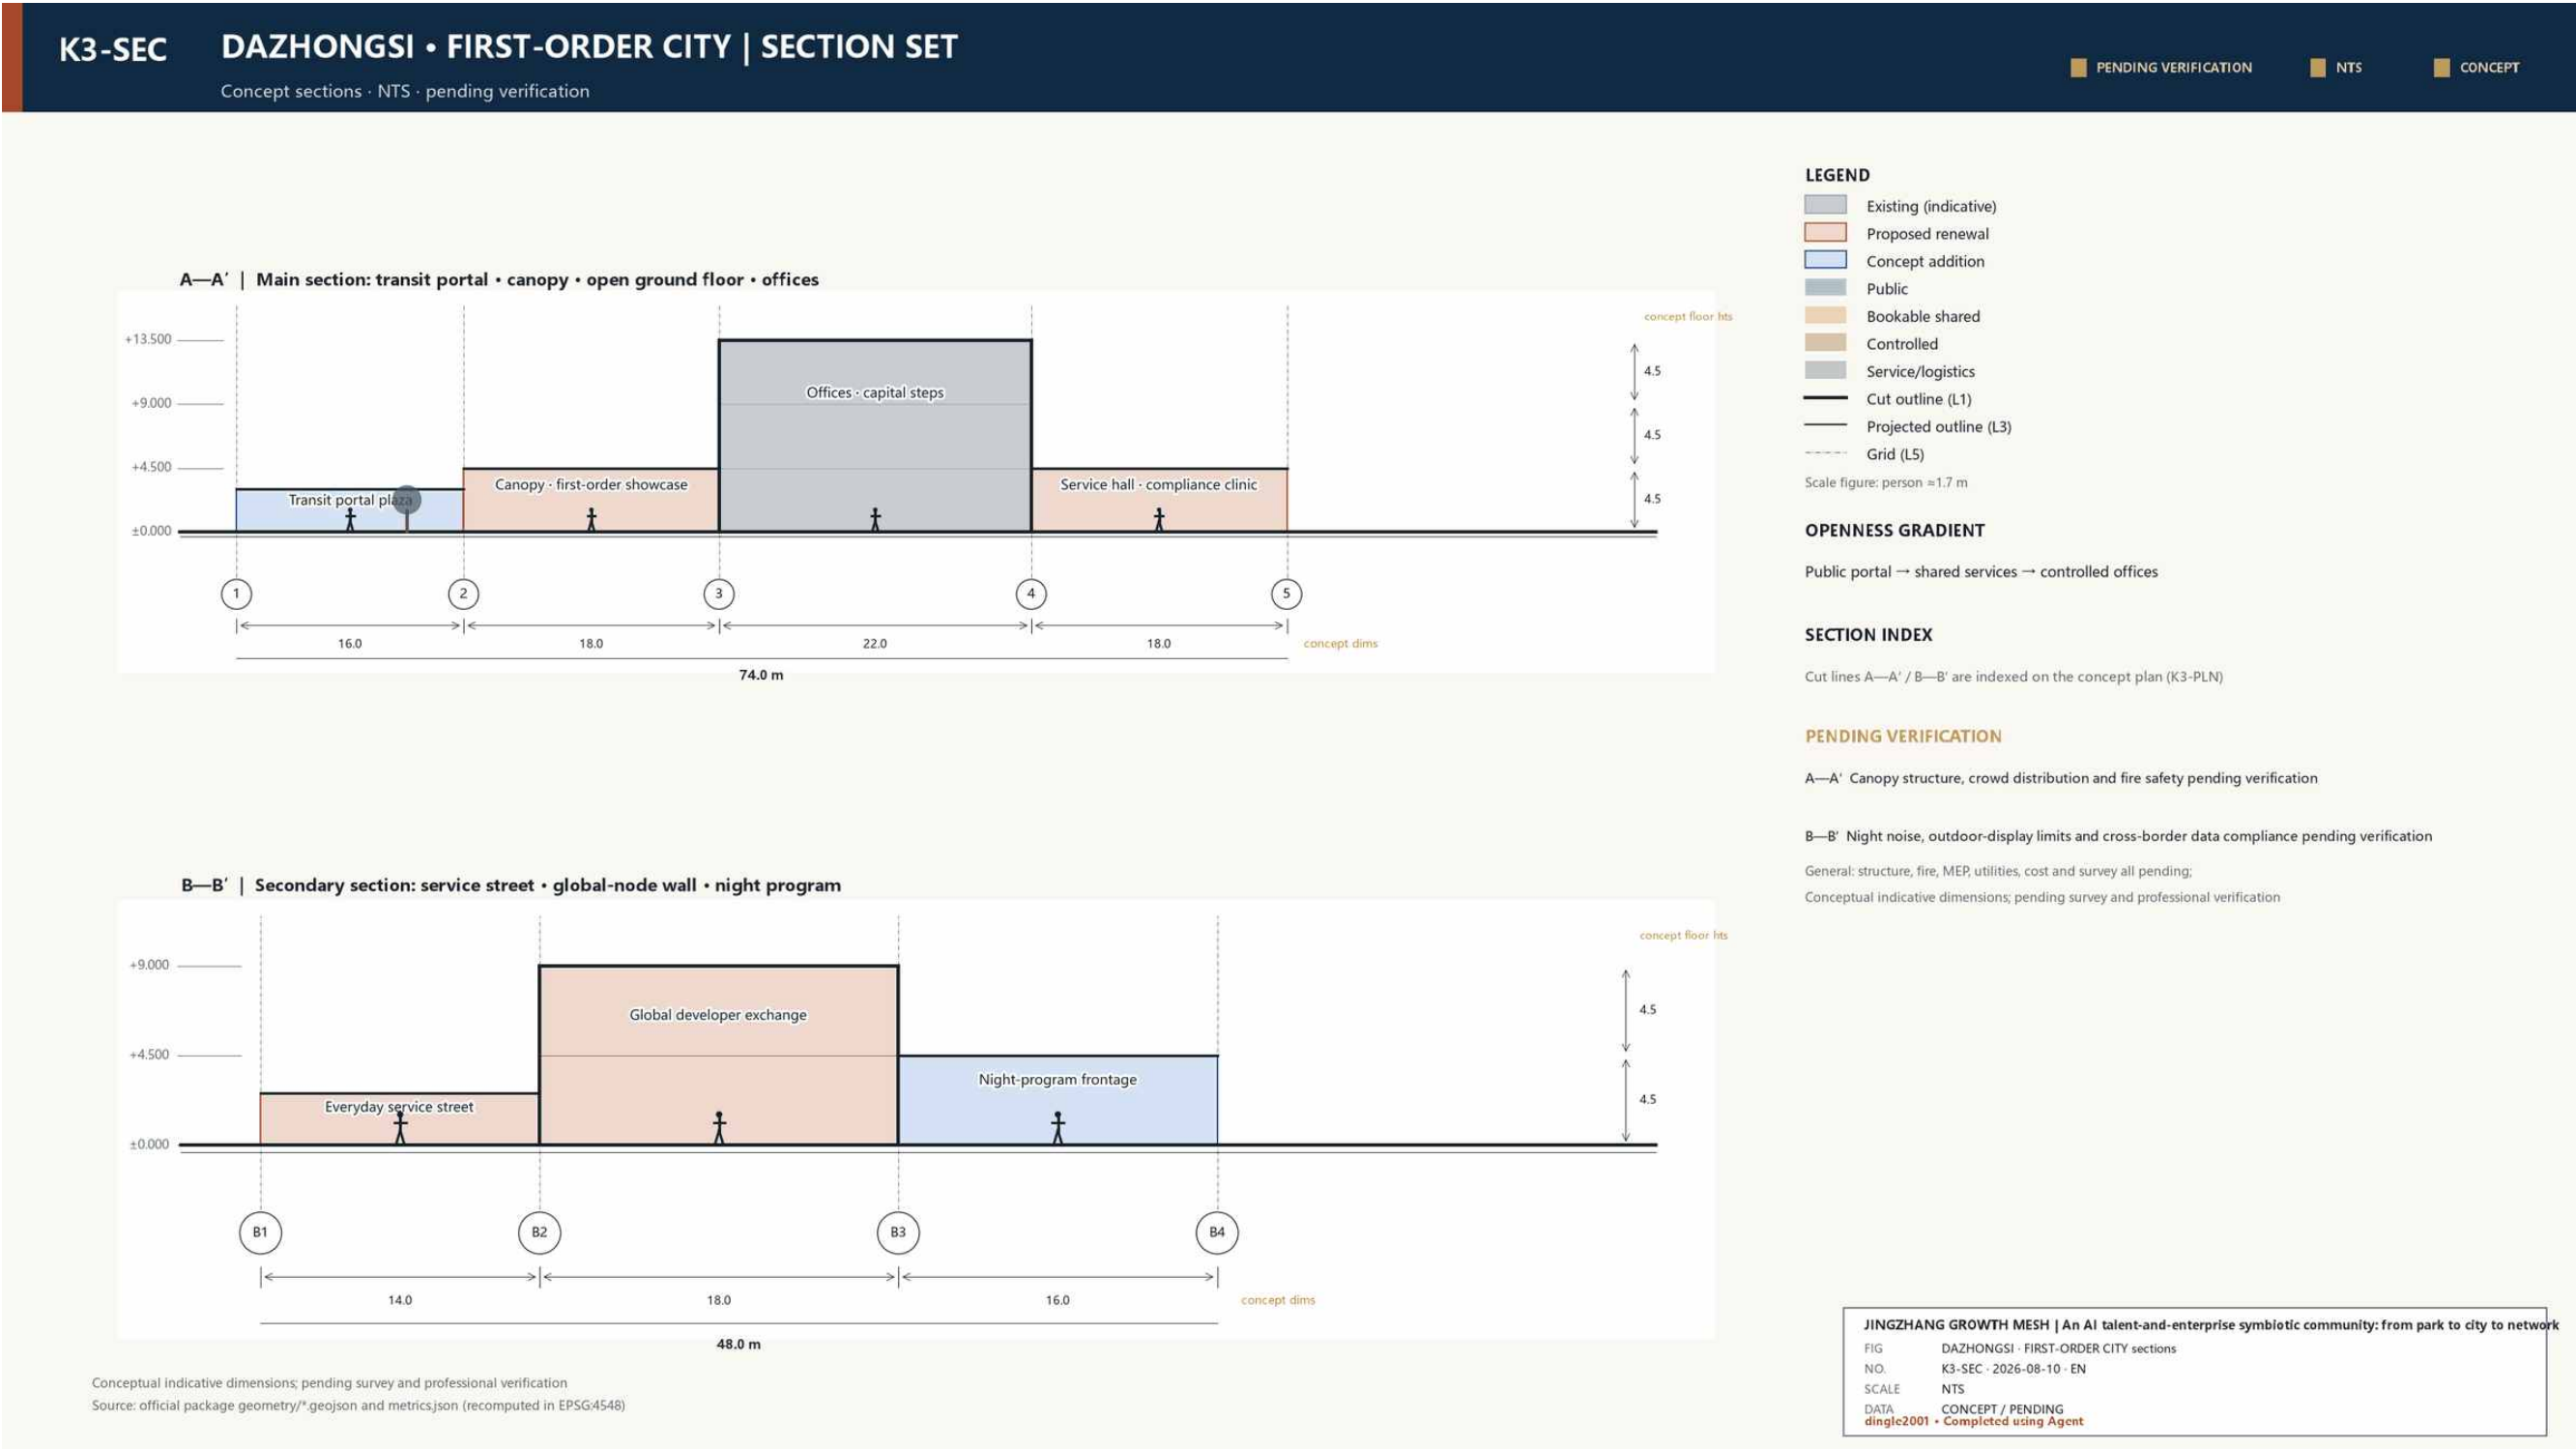

Researchers

Research transfer and collaboration

Core need

Research transfer and collaboration

Space and service

Trusted tests, clinics and sign-off

Public/governance gate

Judge conversion by project evidence, not footfall

Verifiable result

Use record + project evidence + appeal and exit record

Independent developers

Affordable entry and peers

Core need

Affordable entry and peers

Space and service

Short desks, open-source room and compute adaptation

Public/governance gate

Keep a no-membership, no-app public entry

Verifiable result

Use record + project evidence + appeal and exit record

Startup teams

Stable team, validation and first customer

Core need

Stable team, validation and first customer

Space and service

Residency, testing, first order and compliance

Public/governance gate

Pitching or intent never substitutes for first-order evidence

Verifiable result

Use record + project evidence + appeal and exit record

Growth companies

Expansion, standards and capital links

Core need

Expansion, standards and capital links

Space and service

Shared facilities, service hall and milestone sessions

Public/governance gate

Growth firms return equipment, mentors or public hours

Verifiable result

Use record + project evidence + appeal and exit record

Services and investors

Trusted entry and duty limits

Core need

Trusted entry and duty limits

Space and service

Named sign-off, transparent fees and evidence packs

Public/governance gate

Disclose qualification, conflicts and suitability

Verifiable result

Use record + project evidence + appeal and exit record

Resident families

Convenient life without forced testing

Core need

Convenient life without forced testing

Space and service

Family support, accessibility and intergenerational co-creation

Public/governance gate

Basic service not tied to data consent; always reversible

Verifiable result

Use record + project evidence + appeal and exit record

Operators and stewards

Schedulable, auditable and stoppable operation

Core need

Schedulable, auditable and stoppable operation

Space and service

Operations desk, event logs and quarterly review

Public/governance gate

Human authorization for high-risk action; no evidence, no scale

Verifiable result

Use record + project evidence + appeal and exit record

Model safety evaluation sandbox

The scenario contract defines service, technology, human duty and exit together.

Problem No independent reproducible safety check before release	Journey Register— isolate —two-person review—sign-off—review
Data D3 restricted; minimum authorization	No-AI Offline test sheet and human panel
Human release Safety lead releases high-risk results	Stop Seal on privilege breach, irreproducibility or isolation failure
Acceptance Complete version, permission, test and review record	Users Research and startup teams

Domestic compute adaptation workshop

The scenario contract defines service, technology, human duty and exit together.

Problem Migration is costly and parameters are sensitive	Journey Book—authorize—adapt—review—migration list
Data D2 commercially sensitive	No-AI Human compatibility test and document comparison
Human release Firm confirms report release	Stop Withdraw on leak or failed migration
Acceptance Reviewable report with authorized inputs	Users Developers and growth firms
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

Bounded robotics field loop

The scenario contract defines service, technology, human duty and exit together.

Problem Urban testing conflicts with public safety	Journey Opening check—bounded run—takeover—review
Data D2 device and incident	No-AI Physical barrier, safety staff and manual testing
Human release Daily human opening and remote takeover	Stop E-stop on breach or takeover failure
Acceptance No unhandled breach; all events logged	Users Robotics firms and public

Open-source project clinic

The scenario contract defines service, technology, human duty and exit together.

Problem Contributions fail to become stable roadmaps	Journey License check—diagnosis—roadmap—ownership
Data D1 project record	No-AI In-person code review and paper checklist
Human release Maintainer confirms license and merge	Stop Pause on license or attribution dispute
Acceptance License, roadmap and owner list per case	Users Researchers and independent developers
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

Founder residency

The scenario contract defines service, technology, human duty and exit together.

Problem Short team formation lacks space and support	Journey Apply—conflict check—reside—review—exit
Data D2 identity and project	No-AI Public desk application and interview
Human release Voluntary disclosure and mentor refusal	Stop Terminate on unresolved bias or conflict
Acceptance Complete exit, deletion and ownership clauses	Users Independent developers and startups
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

AI talent night school

The scenario contract defines service, technology, human duty and exit together.

Problem No stable evening learning entry	Journey Co-create—review—teach—feedback—repeat
Data D0 course + D1 registration	No-AI On-site registration, print and human teaching
Human release Instructor reviews content; operator controls time	Stop Cancel or reschedule unsafe/disturbing content
Acceptance Syllabus, feedback and noise-response record	Users Talent and residents
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

Intergenerational AI living lab

The scenario contract defines service, technology, human duty and exit together.

Problem Life needs miss R&D while vulnerable users risk passive participation	Journey Co-create—consent—small test—human service—exit/delete
Data D2 sensitive personal	No-AI Fully equivalent offline service
Human release Participant/guardian consent + ethics review	Stop Exit and delete on distress or withdrawal
Acceptance 100% reversible; basic service not conditional	Users Families and developers

Accessible multimodal wayfinding

The scenario contract defines service, technology, human duty and exit together.

Problem Routes are hard to understand and tech failure amplifies barriers	Journey Professional route check—publish—assist—close complaints
Data D0 wayfinding + D2 assistance	No-AI Physical signs, human desk and paper map
Human release Accessibility professional signs off	Stop Switch offline on error or outage
Acceptance Professional pre-opening check and traceable complaints	Users Residents and visitors

Talent family support station

The scenario contract defines service, technology, human duty and exit together.

Problem Childcare and eldercare information is fragmented	Journey Register—human confirm—authorize—receipt/withdraw
Data D2 family service	No-AI Walk-in and phone referral
Human release Human desk confirms each referral	Stop Stop interface on wrong referral or privacy linkage
Acceptance Authorization, receipt and withdrawal every time	Users Researchers and families
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

First-order scenario exchange

The scenario contract defines service, technology, human duty and exit together.

Problem Technology is disconnected from real demand and procurement	Journey Publish—conflict disclose—validate—co-sign—procurement review
Data D2 procurement/business	No-AI Public problem session, human panel and offline matching
Human release Demand owner and compliance co-sign	Stop Remove false demand or conflict
Acceptance Complete problem-validation-procurement evidence	Users Startups and demand owners
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	

Enterprise compliance clinic

The scenario contract defines service, technology, human duty and exit together.

Problem AI advice may cross professional qualification limits	Journey Classify—retrieve—human review—sign or refer
Data D2 enterprise compliance	No-AI Human consultation and paper checklist
Human release Qualified professional signs formal advice	Stop Refuse bad, out-of-scope or obsolete advice
Acceptance All formal advice traceable to signer	Users Firms and professional services
No baseline, no score • named owner • acceptance evidence • continue / adjust / step back / exit	


Urban-agent operations desk

The scenario contract defines service, technology, human duty and exit together.

Problem Cross-scenario operations lack audit, appeal and takeover	Journey Read—recommend—human authorize—act—audit—appeal
Data D1 operations + D2 complaints	No-AI Manual register, phone and in-person service
Human release Human authorization for each high-risk action	Stop Read-only on breach, drift or appeal backlog
Acceptance Least privilege, full logs, sampling and takeover	Users Operators and public


Twelve-scenario governance matrix

D0-D3, M1-M3, human release, failure modes and evidence.

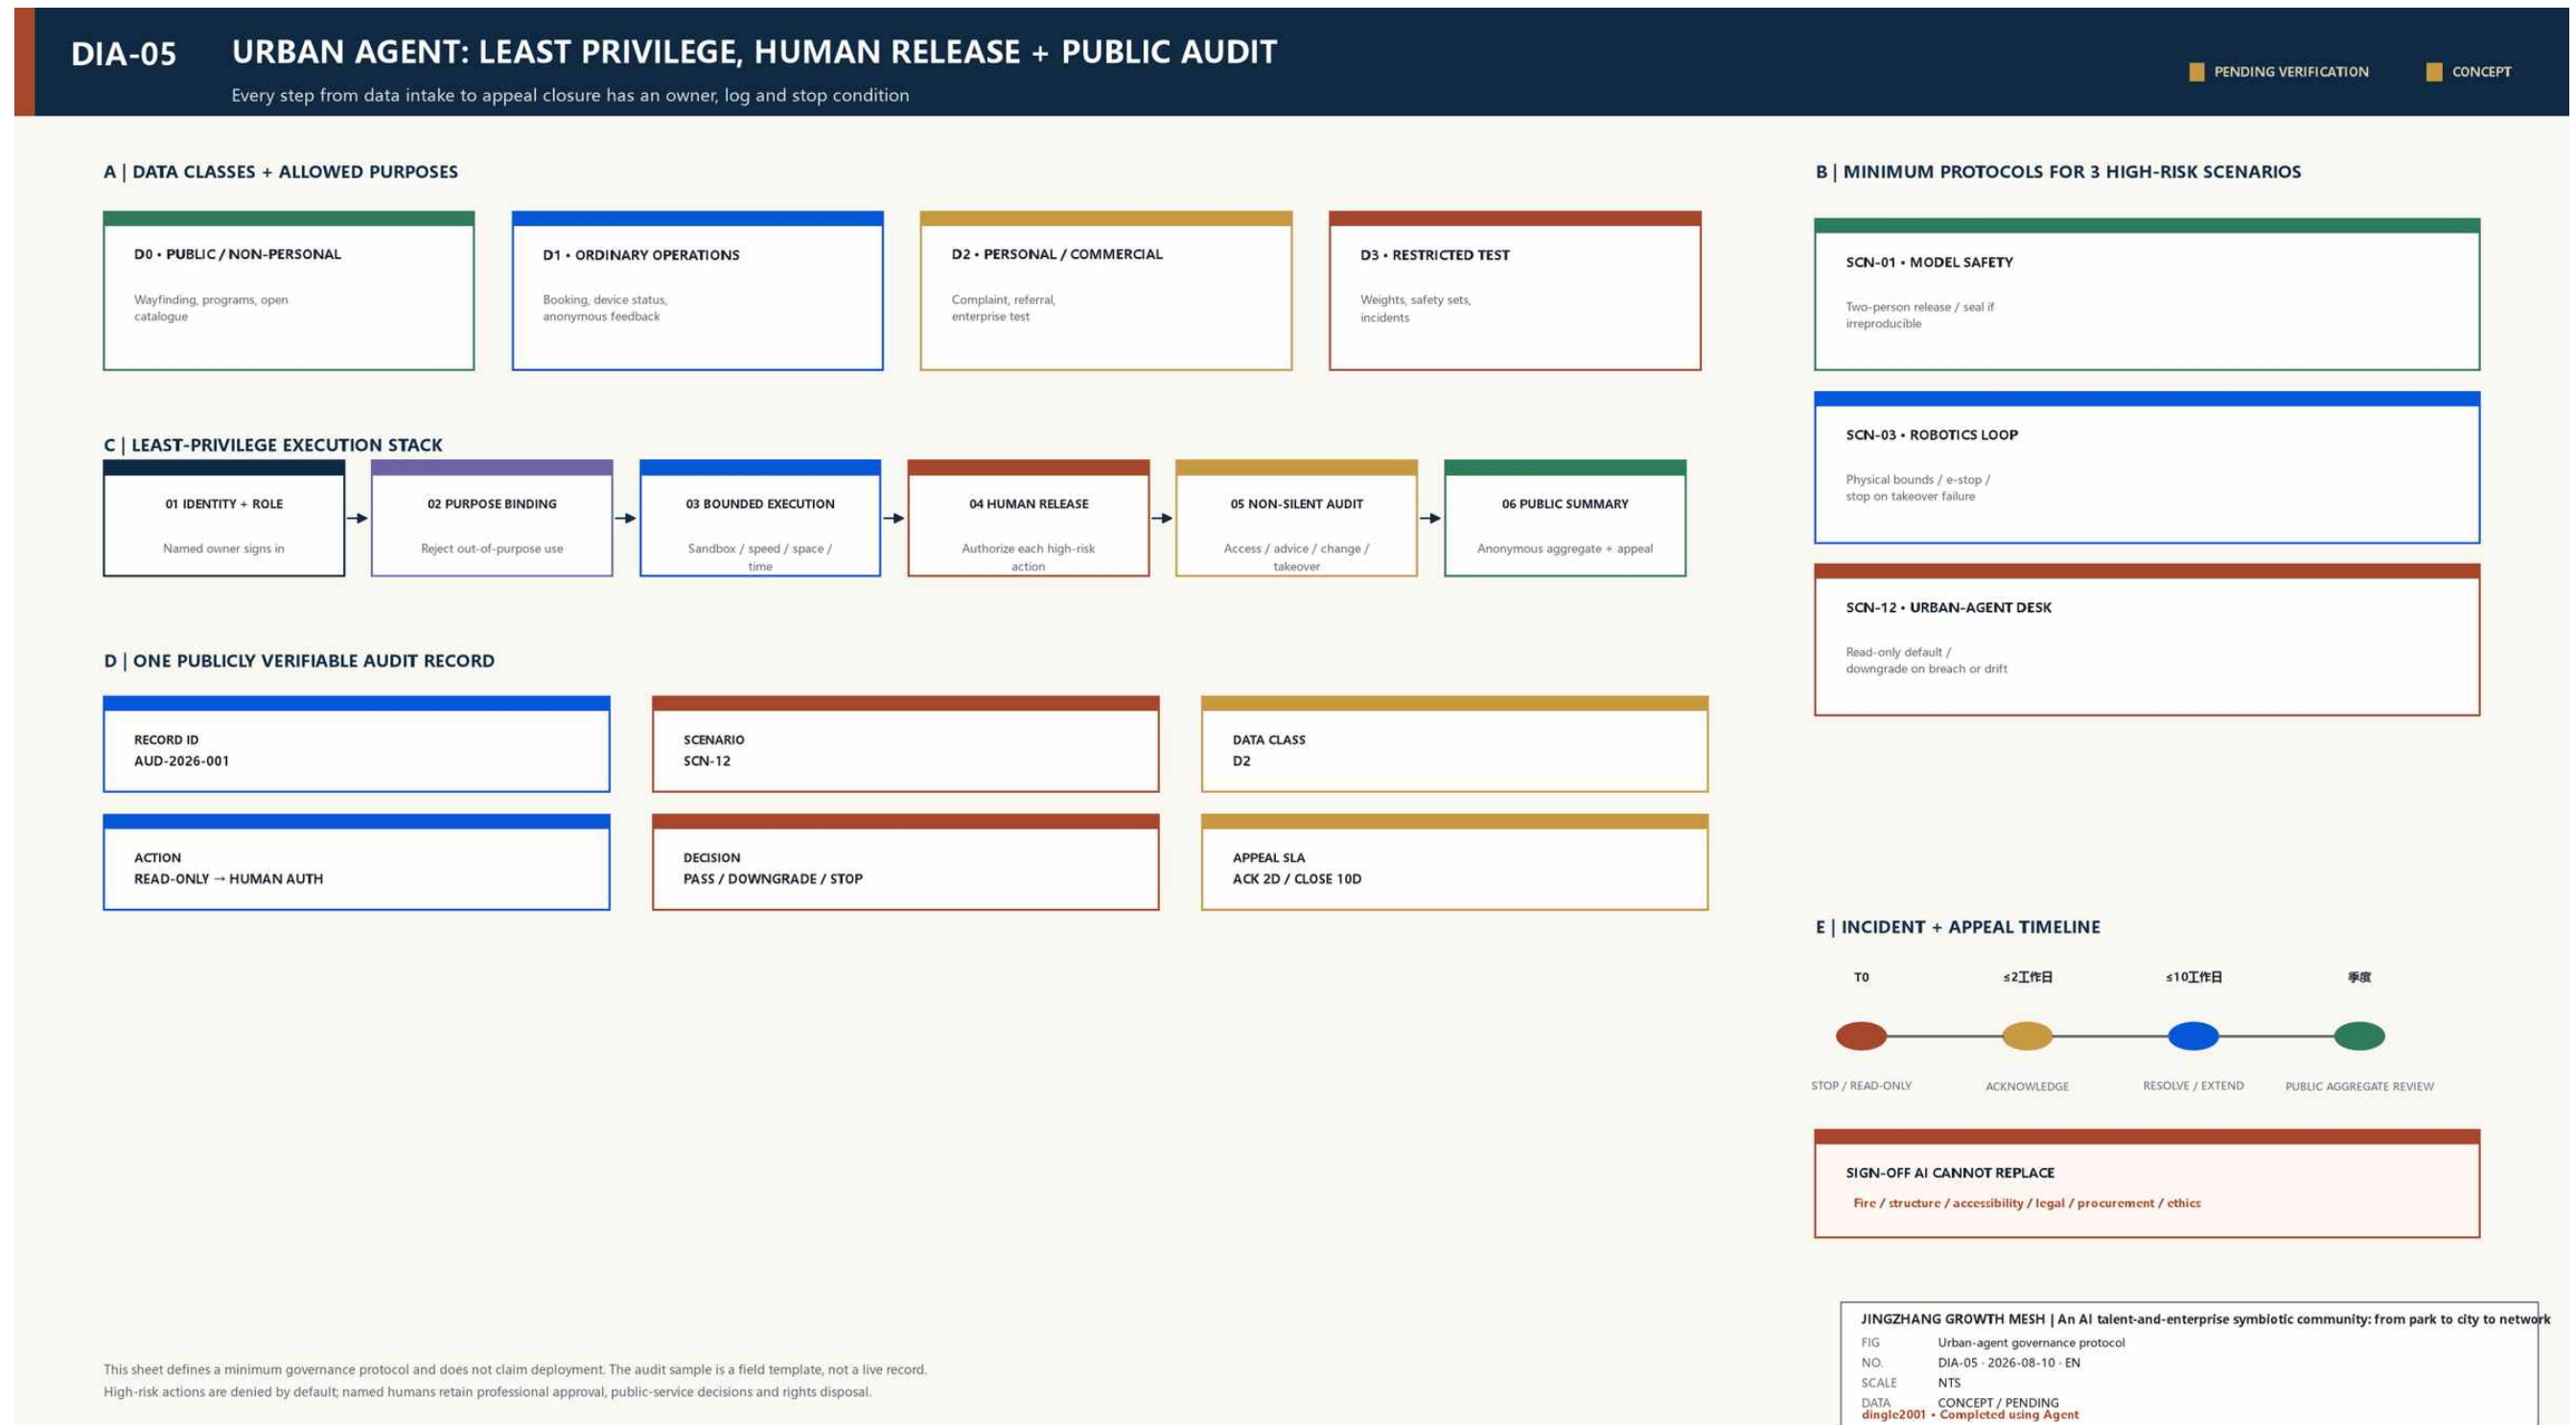

Xiaoyuehe scenario-empowerment wing

Public problems become test orders and results return to public-space improvement.

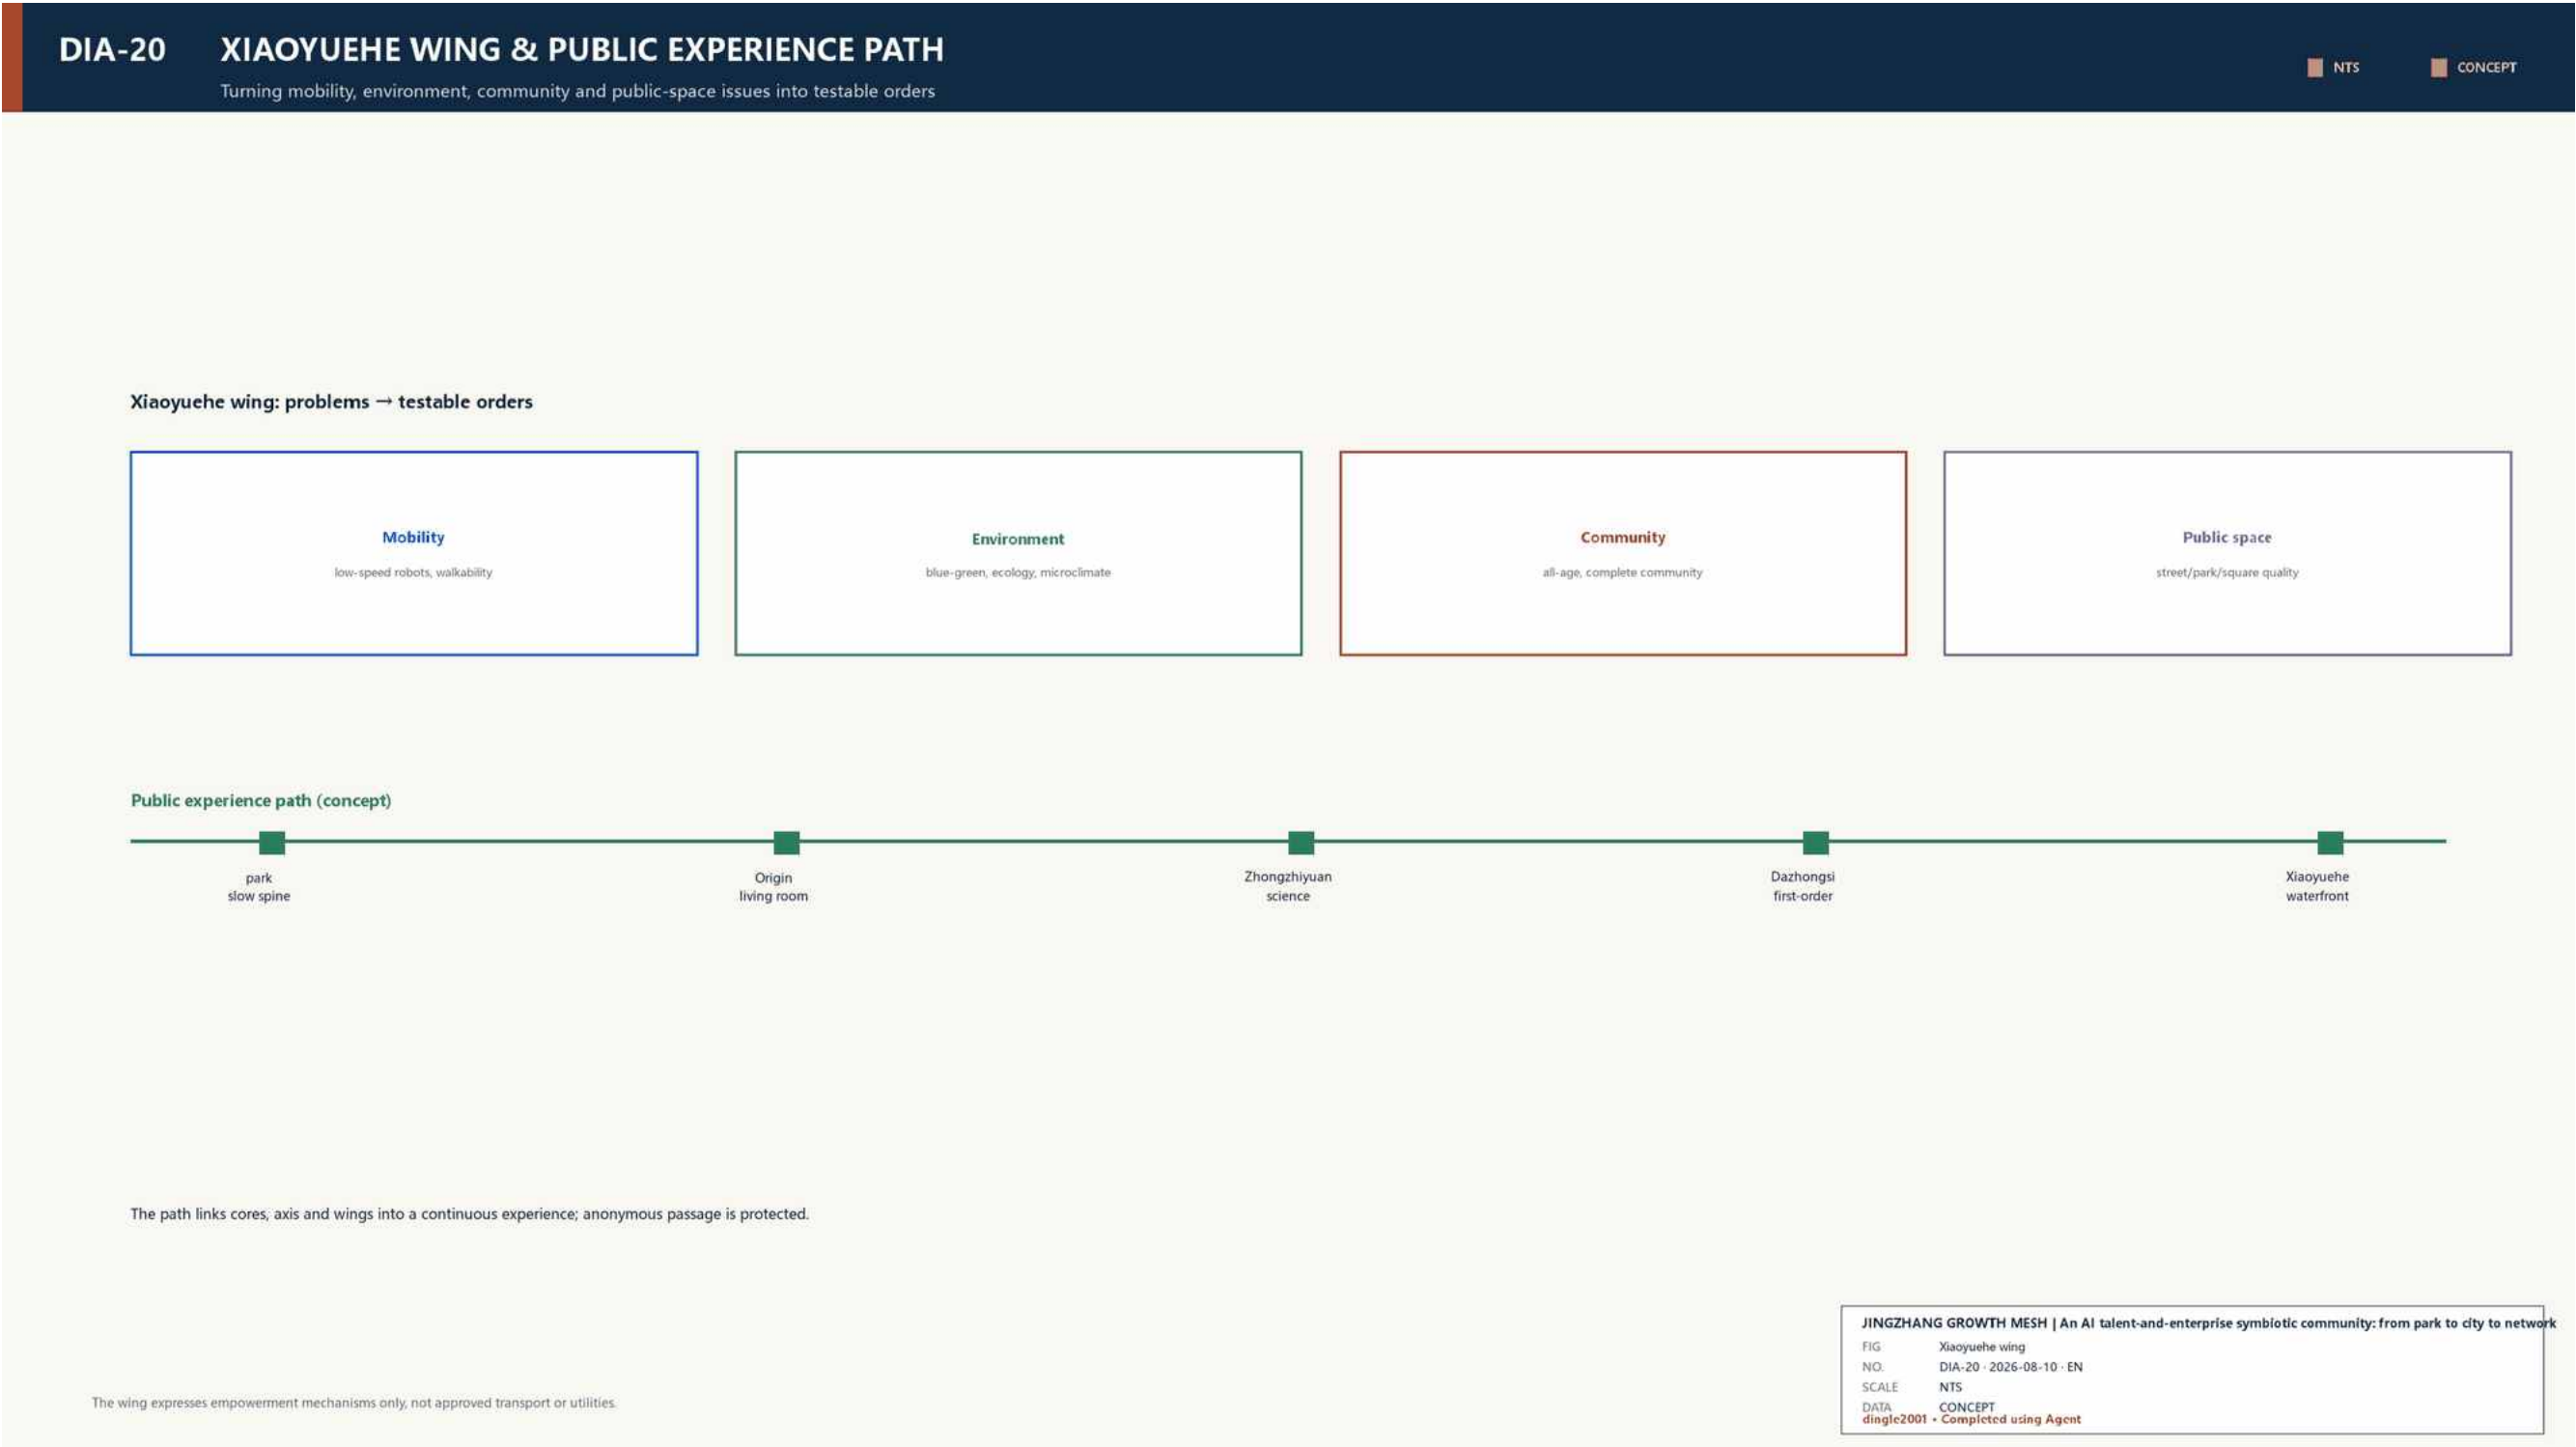

Shared validation laboratory

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Small teams lack trusted test facilities	Cause High equipment thresholds and missing sharing/accountability rules	Measure Verify large spans, then operate shared equipment through booking, tiered access and professional sign-off
Output Equipment catalogue, booking protocol, test sheet and incident log	Result Validation moves from endorsement to reproducible evidence	Metric Equipment use, reproducible-test share and major incidents
Operation Professional test operator; account by equipment hour and task service	Phase 0-1 year protocol and small pilot	Funding Quasi-public: public guidance plus equipment service; amount pending
Stop gate No move-in without structure, fire and load sign-off		

Domestic compute adaptation workshop

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Domestic-compute migration has high trial cost	Cause Compatibility knowledge is fragmented and parameters are sensitive	Measure Run adaptation, migration and review with authorized data in an isolated environment
Output Compatibility report, migration list and issue knowledge base	Result Reduce repeated failure and create reusable migration paths	Metric Report review rate, closed migrations and leak incidents
Operation Compute provider plus open-source community; task and equipment fees	Phase 0-1 year first task cohort	Funding Quasi-public: provider input, policy tools and task fees
Stop gate Pause if provenance, authorization or isolation is unclear		

Bounded robotics test loop

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Robotics firms lack a low-risk urban test setting	Cause Public walking conflicts with test flows; insurance and takeover duties are unclear	Measure Use physical limits, time windows, speed caps, e-stop, remote takeover and on-site safety staff
Output Test-window plan, opening checklist, incident and review logs	Result Create a governable pre-deployment urban test	Metric Unhandled boundary breach, e-stop response and incident closure
Operation Site operator plus accountable safety entity; charge by test window	Phase 0-1 year closed tests	Funding Quasi-public: site input plus test fees
Stop gate E-stop on public-lane intrusion or takeover failure		
No baseline, no score · named owner · acceptance evidence · continue / adjust / step back / exit		

Standards co-creation room

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Test results rarely become cross-firm rules	Cause Topics, IP and ownership of outputs are unclear	Measure Organize problem sheet, evidence pack, workshop and public summary
Output Topic register, minutes, evidence summary and draft advice	Result Turn one-off tests into shareable rules	Metric Drafts produced, adoption feedback and rights disputes
Operation Industry association plus professionals; dues and task procurement	Phase 0-1 year quarterly workshop	Funding Public-benefit: public support plus association resources
Stop gate No topic without a problem owner and clear IP boundary		

Public science interface

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Secure testing lacks an interface for public understanding	Cause Test space is closed and science communication can become marketing	Measure Provide observation walks, weekend opening and non-sensitive result interpretation
Output Opening rules, science script, risk separation and feedback	Result Improve public understanding and return from the AI ecosystem	Metric Open hours, accessible coverage and complaint closure
Operation Park operator plus science institution; public-service procurement	Phase 0-1 year weekend pilot	Funding Public-benefit: public and science-institution input
Stop gate No opening before segregation, interpretation duty and rights clearance		

Origin open-source living room

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Developers attend events but lack durable project collaboration	Cause Contribution licenses, diagnosis and persistent maintainers are missing	Measure Run weekly clinics, maintainer hours and contribution records
Output License list, roadmap, responsibility allocation and review	Result Convert visitor relations into durable projects	Metric Persistent teams, merged contributions and dispute closure
Operation Community operator plus maintainers; membership and public subsidy	Phase 0-1 year operate before works	Funding Quasi-public: public subsidy, sponsorship and services
Stop gate Adjust if license disputes persist or footfall produces no projects		

Founder residency units

Project contract: works trace to problems; results trace to evidence and ownership.

Problem

Early teams lack affordable short-cycle work-life support

Cause

Long leases, deposits and live-work limits exclude them

Measure

Use small short-stay cohorts, explicit use, mentor recusal and stage review

Output

Residency agreement, recusal record, milestone and exit form

Result

Reduce life and space friction during team formation

Metric

Completion, team stability and exit disputes

Operation

Professional incubator; short-stay and incubation services

Phase

1-3 year rolling small cohorts

Funding

Commercial: operating income plus incubation fund

Stop gate

No occupancy without legal use, fire safety and fair selection

Geek cafe and night school

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Researchers and residents lack a low-barrier evening interface	Cause Daytime office use dominates; evening content may disturb neighbors	Measure Use time-shared rooms, co-created courses, noise limits and no-purchase seats
Output Program, conversion checklist, noise and feedback records	Result Build durable cross-institution weak ties	Metric Repeat programs, no-purchase hours and disturbance complaints
Operation Community business plus course curator; separate food and course accounts	Phase 0-1 year lightning-talk pilot	Funding Commercial: operating and course income
Stop gate Reduce hours if disturbance or consumption displaces public time		

Talent family support station

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Talent families face high childcare, eldercare and emergency referral cost	Cause Service information is fragmented and privacy/duty boundaries are weak	Measure Provide a human desk, authorized referral, receipt and withdrawal
Output Service catalogue, referral, receipt and complaint closure	Result Reduce everyday friction that drives talent away	Metric Effective referrals, response time, withdrawals and complaints
Operation Community service institution; public-service procurement	Phase 0-1 year needs register, then recurring service	Funding Public-benefit: public and community-service funding
Stop gate Stop the interface on unconfirmed referral or privacy linkage		

Intergenerational AI living lab

Project contract: works trace to problems; results trace to evidence and ownership.

Problem R&D misses life feedback while residents risk becoming passive subjects	Cause Consent, vulnerable-user protection and basic-service boundaries are weak	Measure Use small co-creation, free exit, equivalent offline service and ethics review
Output Consent, test, exit/deletion and needs records	Result Life needs improve products without sacrificing basic rights	Metric Withdrawal execution, adopted needs and adverse events
Operation Community plus technical team; research service and public support	Phase 1-3 year bounded co-creation	Funding Quasi-public: public subsidy plus technical input
Stop gate Stop if withdrawal fails or basic service depends on participation		
No baseline, no score · named owner · acceptance evidence · continue / adjust / step back / exit		

First-order scenario center

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Early projects struggle to secure a first real customer	Cause Demand publication, validation and procurement judgment are disconnected	Measure Use a problem catalogue, validation sheet, co-sign and procurement review
Output Problem sheet, validation report, conflict declaration and procurement review	Result Give technology a verifiable first application opportunity	Metric Complete evidence chains, procurement-review conversion and false demand
Operation Industry operating platform; service fee and procurement support	Phase 0-1 year problem catalogue, then recurring	Funding Quasi-public: operating income plus service fees
Stop gate Remove false demand or undisclosed conflicts immediately		

Enterprise service hall

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Startups spend heavily finding registration, tax and IP services	Cause Entries are fragmented and qualifications/prices are opaque	Measure Provide one catalogue, named professionals, booking and evaluation
Output Service catalogue, qualifications, prices, booking and receipt	Result Reduce enterprise formation and growth transaction cost	Metric Closed services, reduced repeat inquiries and complaint handling
Operation Professional service consortium; transparent service fees	Phase 1-3 year staged entry	Funding Commercial: service fees plus space operation
Stop gate No entry without transparent qualification, price and accountability		

Pre-compliance clinic

Project contract: works trace to problems; results trace to evidence and ownership.

Problem AI firms lack compliance judgment before opening and scenario launch	Cause AI advice may replace professional judgment and cross-discipline issues lack sign-off	Measure AI only organizes material; qualified professionals review, sign and record limits
Output Opening checklist, signed advice, referral and version record	Result Move correction from post-event enforcement to pre-launch	Metric Professional sign-off, correction closure and out-of-scope refusal
Operation Registration, legal and IP professionals; per-case service	Phase 0-1 year checklist pilot	Funding Commercial: professional service fees
Stop gate Refuse unsigned, out-of-scope or obsolete advice		

Capital milestone steps

Project contract: works trace to problems; results trace to evidence and ownership.

Problem Projects have many pitches but little milestone and risk evidence	Cause Promotion replaces validation; suitability and disclosure are weak	Measure Admit only evidence-gated projects using milestone, risk and use-of-funds templates
Output Evidence pack, disclosure, Q&A record and follow-up	Result Improve credible capital links without implying financing	Metric Valid follow-ups, information corrections and complaints
Operation Operator plus investment institutions; event service fees	Phase 1-3 year quarterly sessions	Funding Commercial: event and professional services
Stop gate Remove misleading presentation or evidence-deficient projects		


Global developer exchange

Project contract: works trace to problems; results trace to evidence and ownership.

Problem International collaboration often stops at one-off events	Cause Partnership rights, cross-border data and follow-up conversion are weak	Measure Use bilingual problems, open-source license, node recognition and 90-day follow-up
Output Rights-cleared content, exchange record, follow-up and withdrawal route	Result Build a durable developer network and project conversion	Metric Continuing collaboration, bilingual access and rights objections
Operation Community operator plus written-confirmed partners; project basis	Phase 3-5 years after evidence matures	Funding Quasi-public: public support plus partner input
Stop gate No name/mark use or cross-border transfer without written confirmation		


Six implementation loops

Diagnosis, policy, actors, funding, build-operation and review all must close.

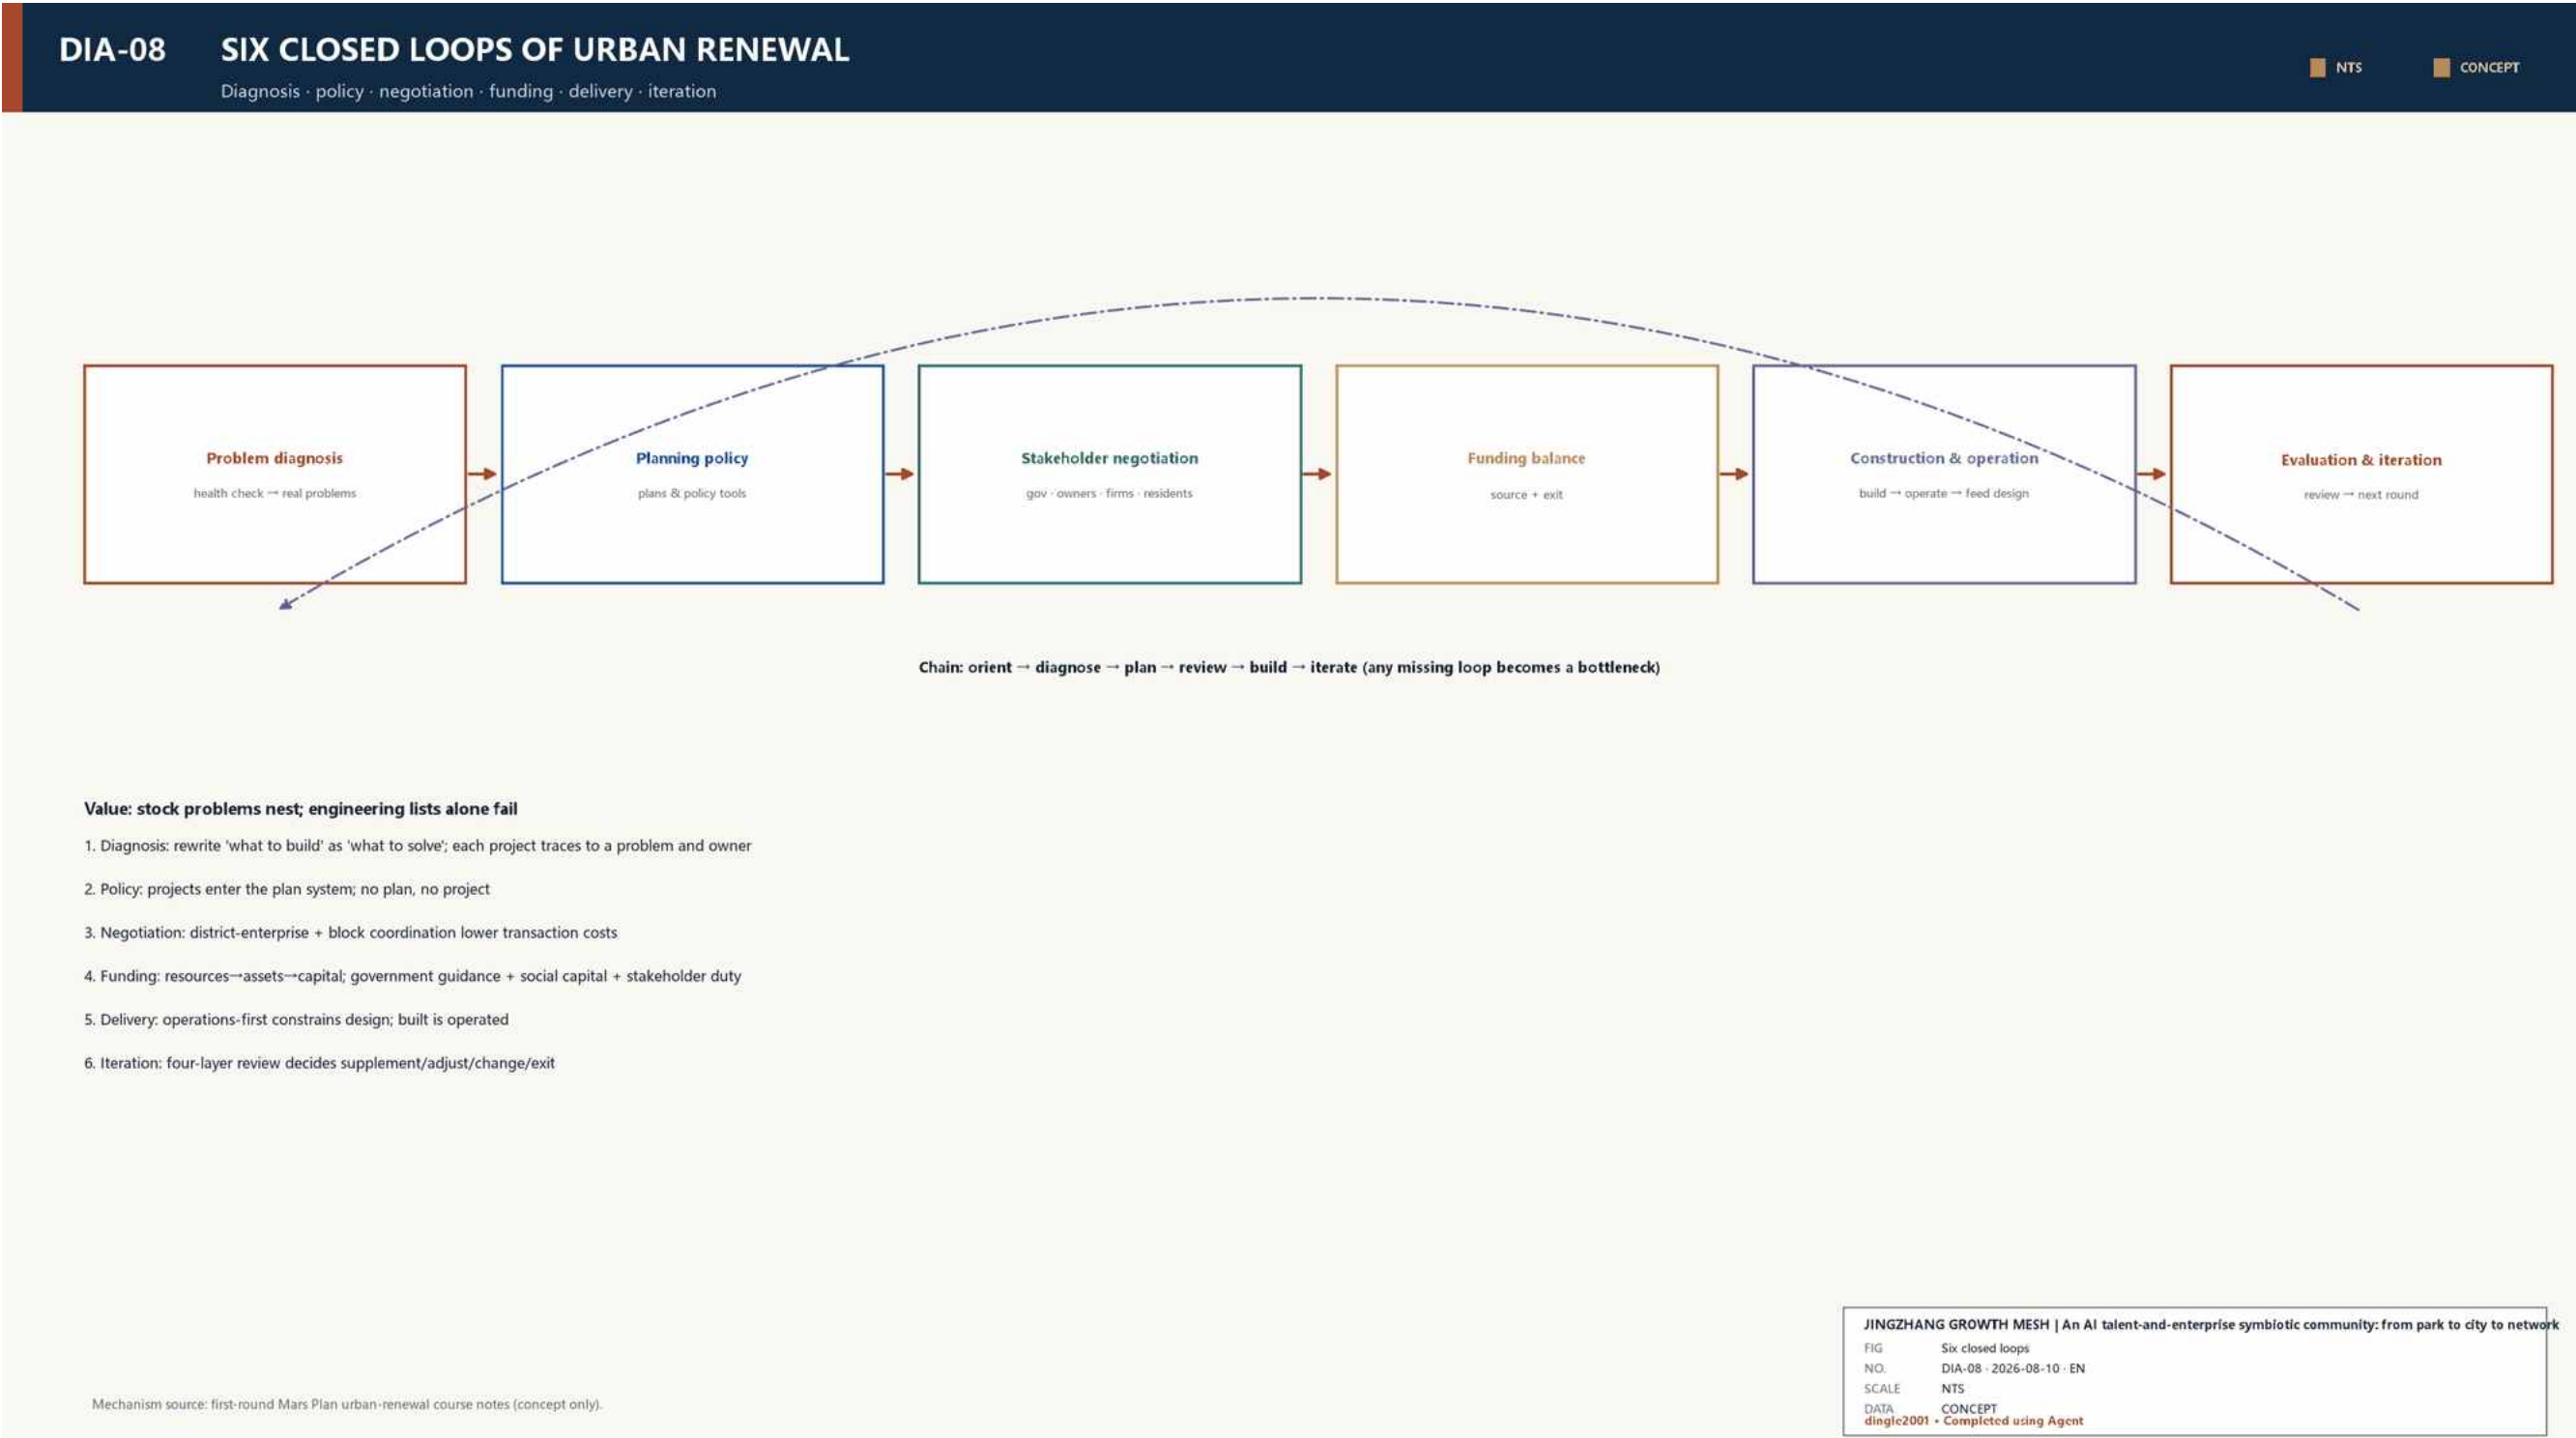


Project library and mainline

Library—renewal plan—implementation plan—joint review—parallel approval.

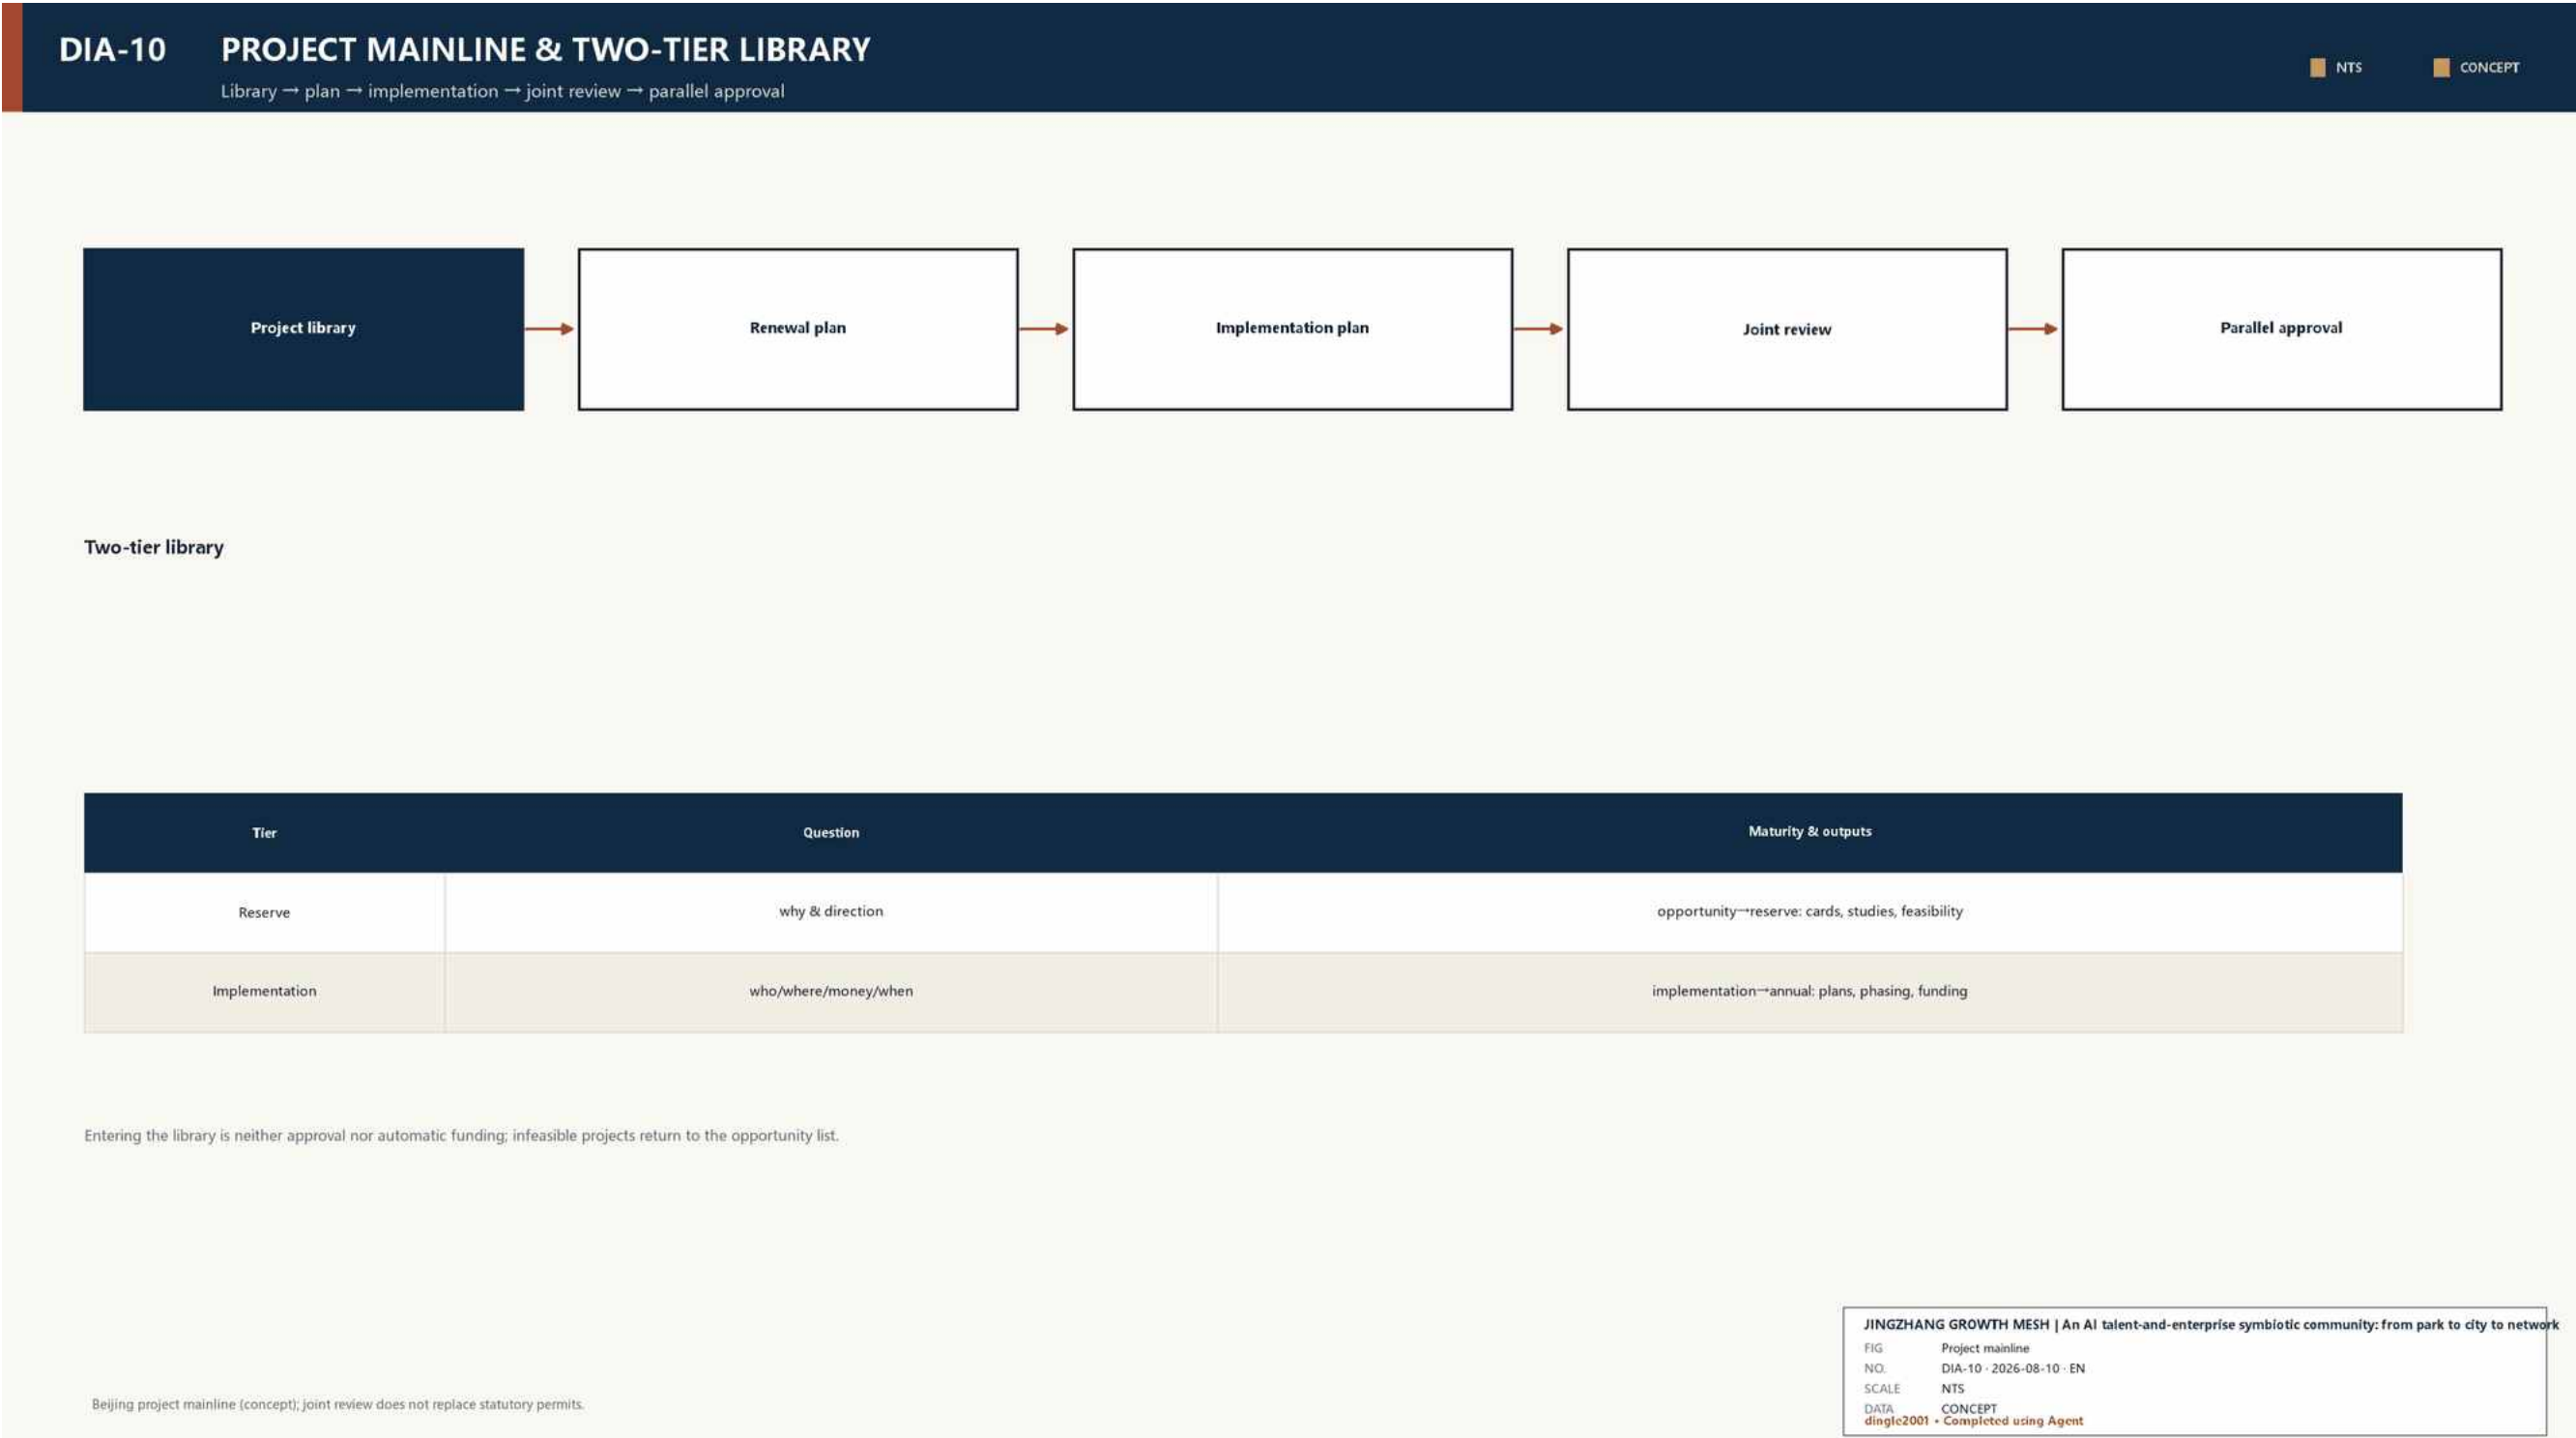


One map, two tables, six lists

Place planning, rights, works, funding, operation and risk on one work surface.

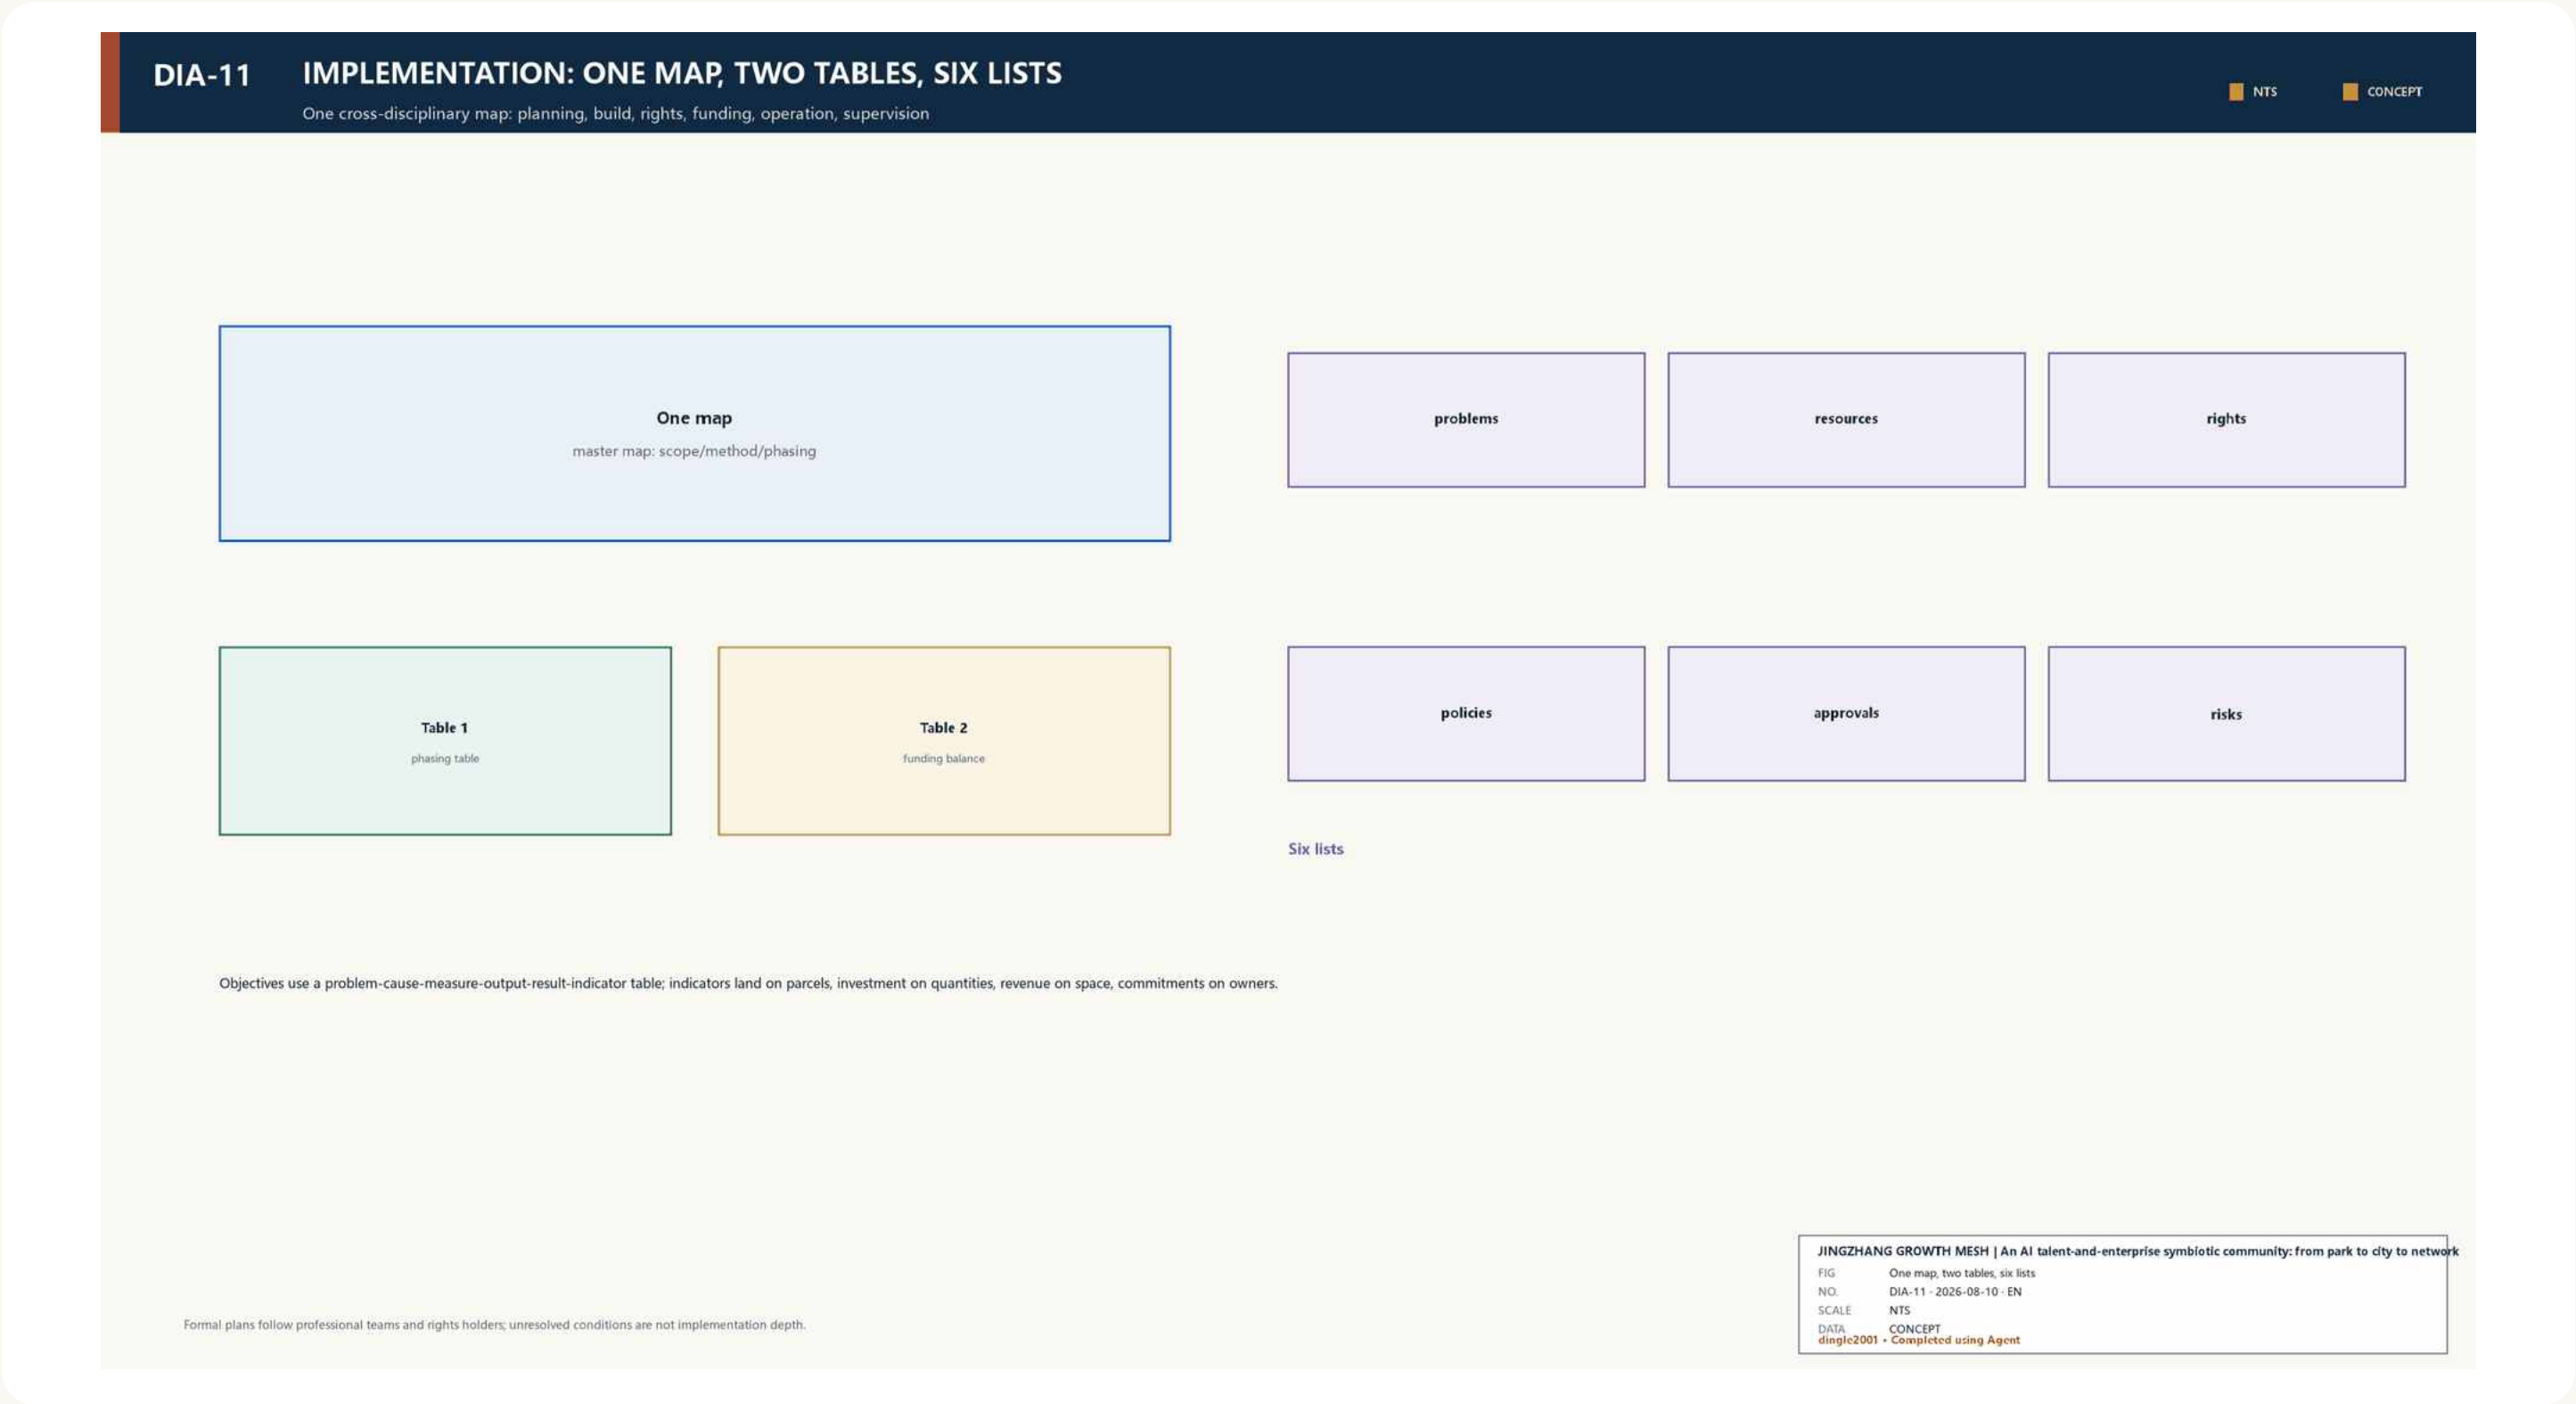


Five stages of operations-first

Positioning, design, investment, construction and handover are tested by future use and operation.

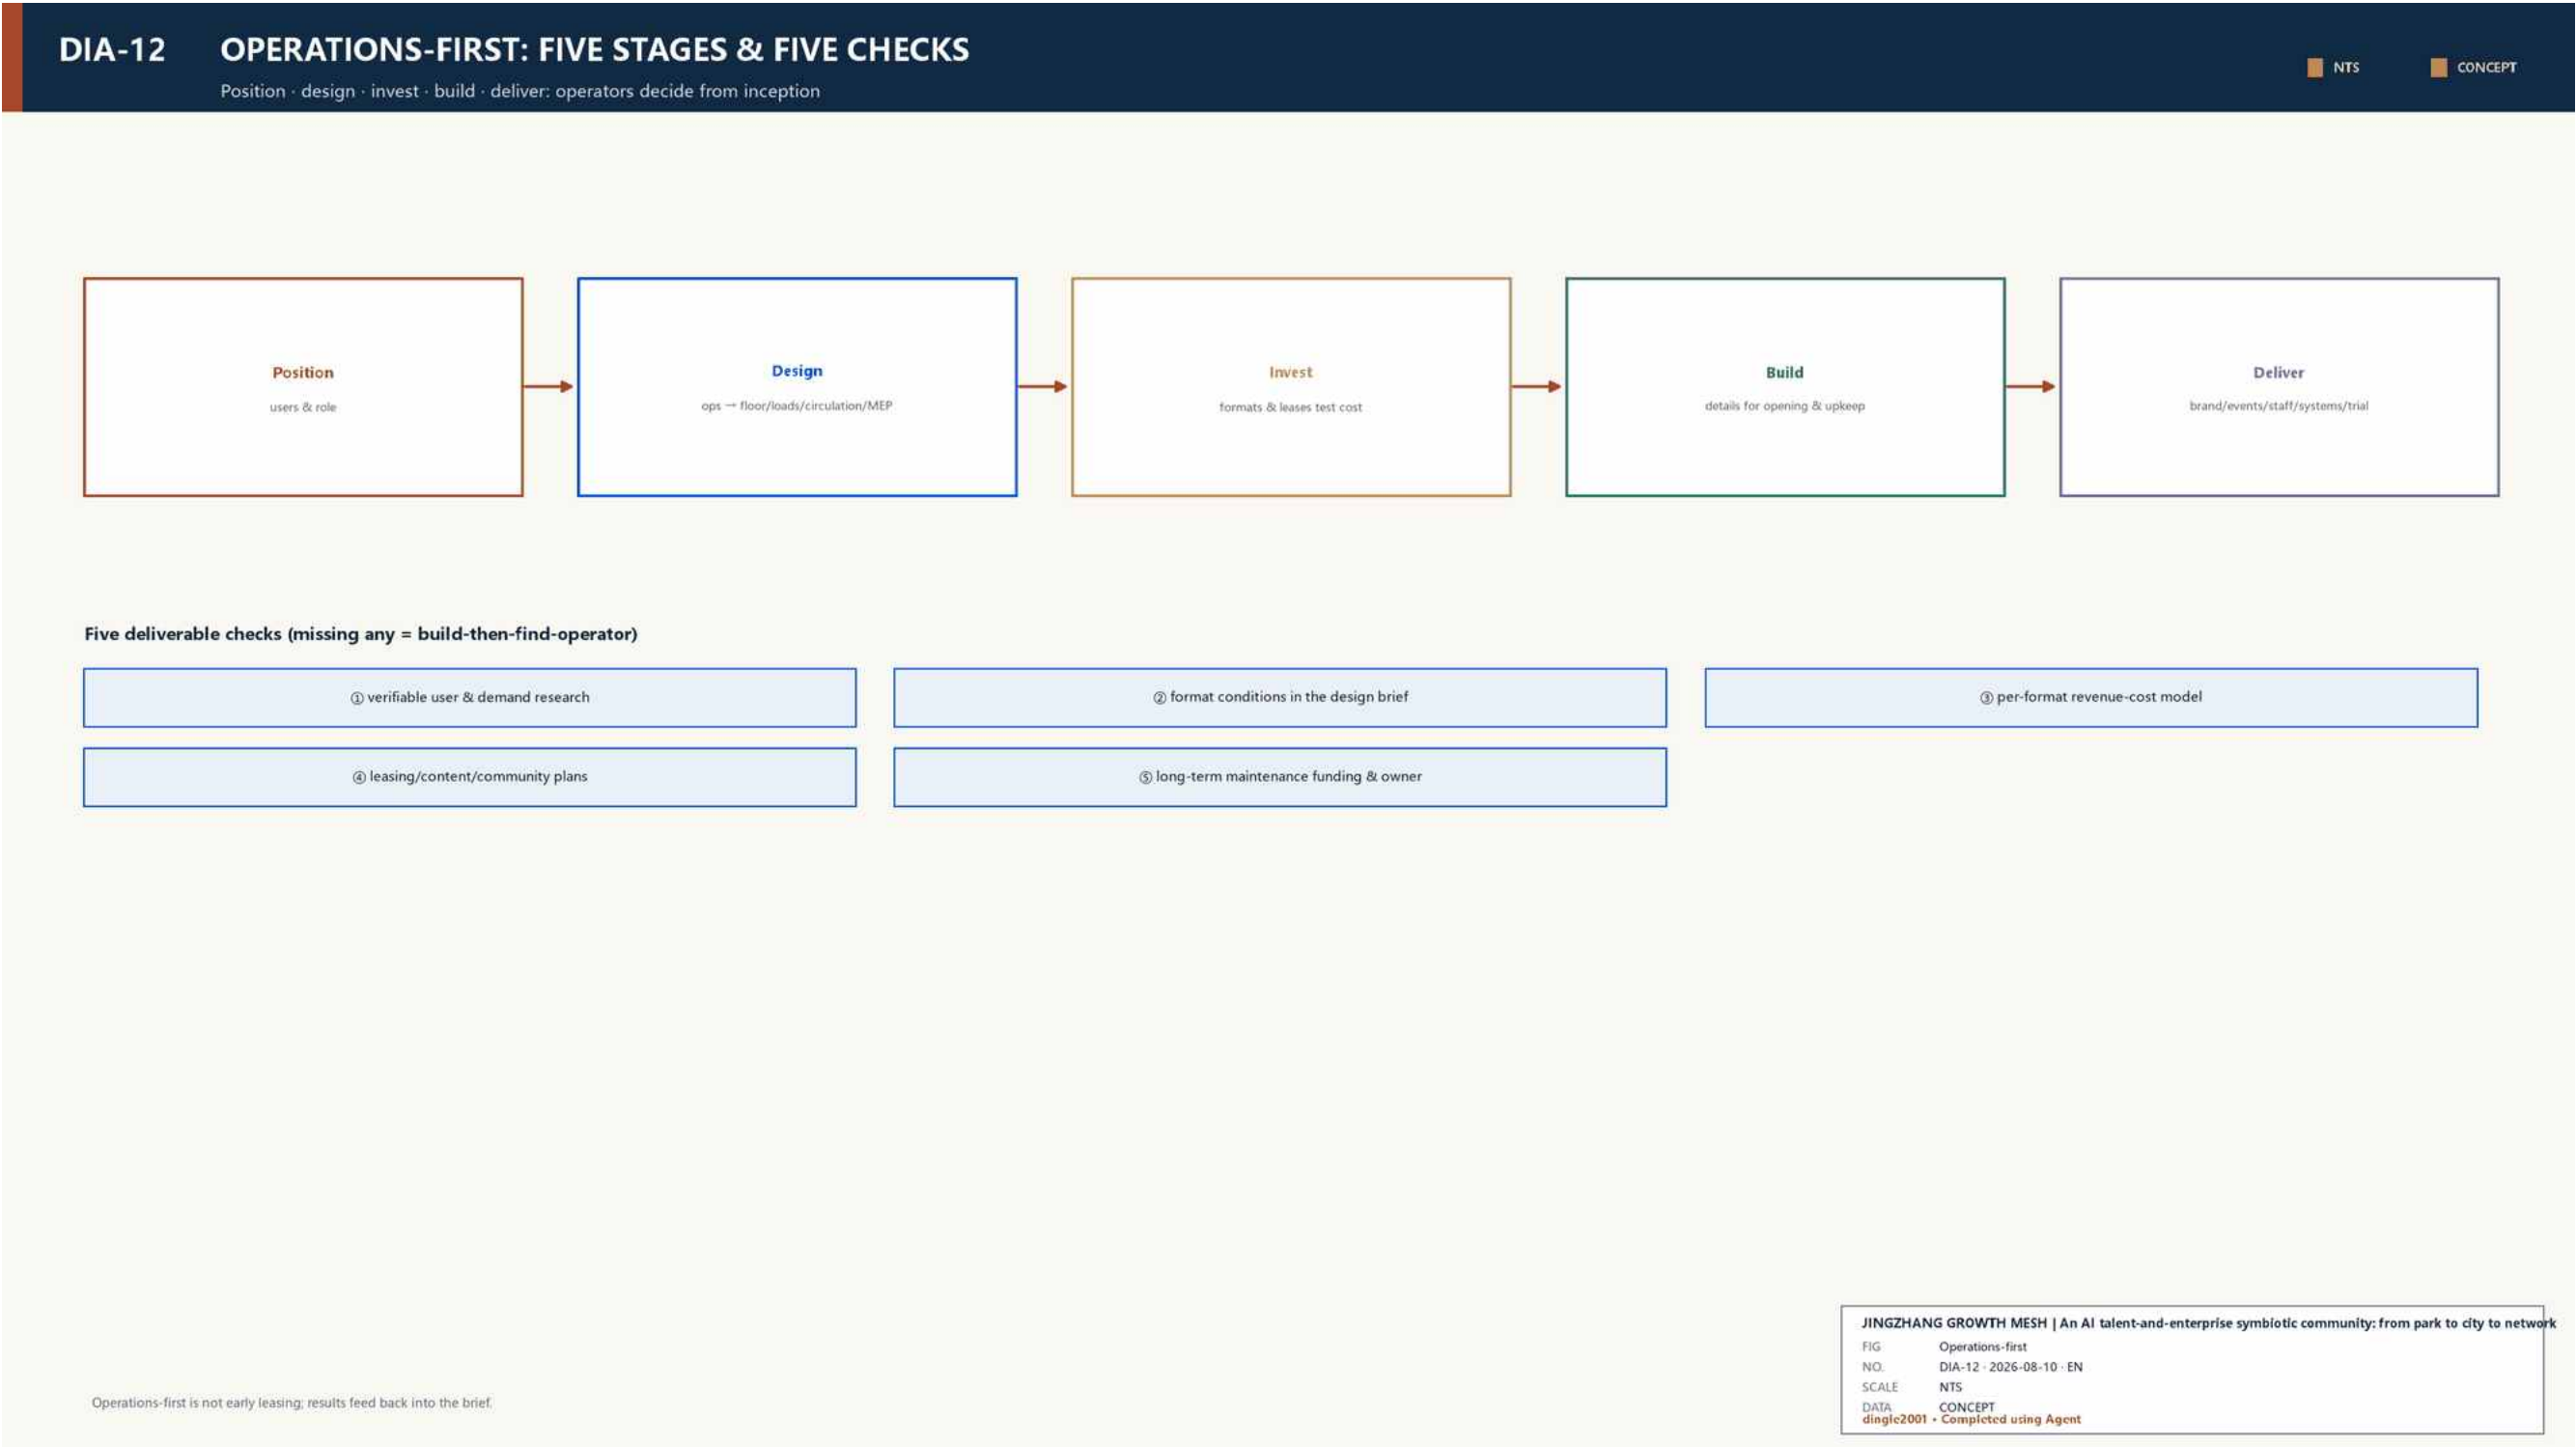

Funding and unit accounts

Separate public, quasi-public and commercial accounts; invent no totals, rents or payback.

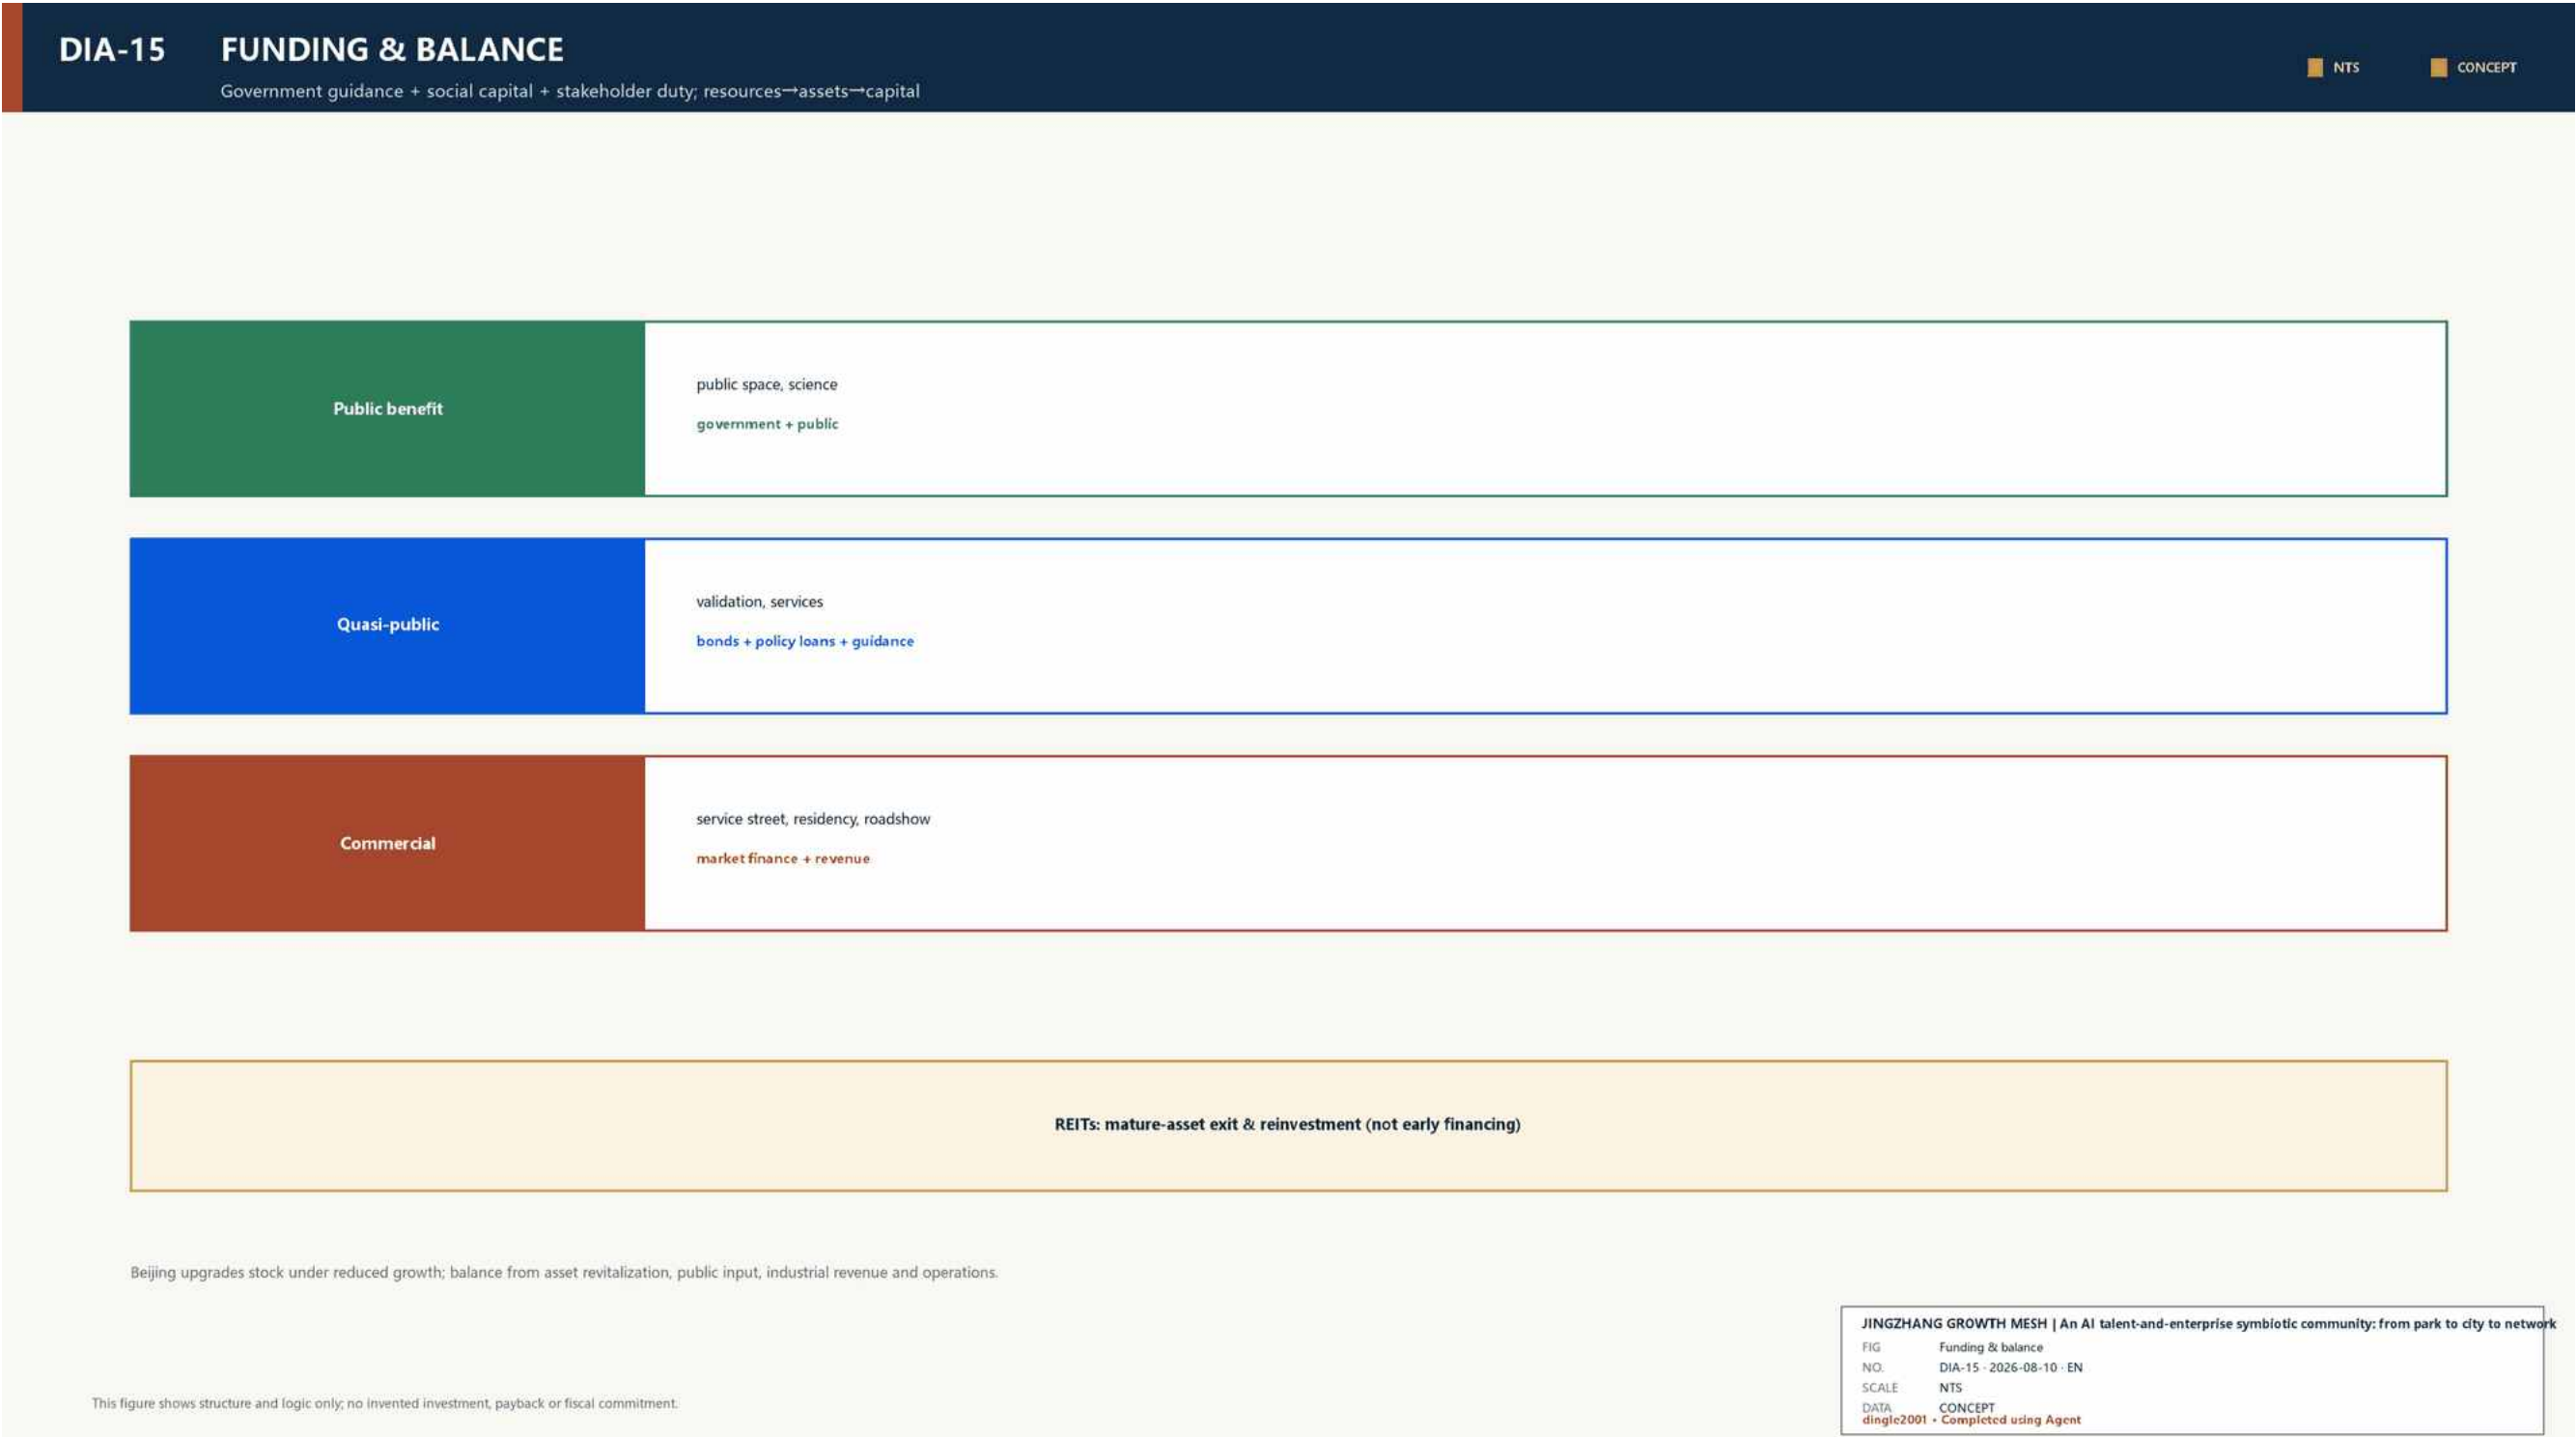

90-day minimum credible pilot

Validate rules, ownership, takeover, appeal and exit before scaling works.

D0-15

Baseline, rights, demand and risk; stop if unclear

D16-30

Charter, data class, acceptance and appeal

D31-60

Three industrial tests produce reproducible sheets

D61-75

Public test, accessibility, co-governance and first order

D76-90

Anonymous audit and continue/adjust/exit decision

Pre-opening completeness rehearsal

All 310 synthetic fixtures returned the expected block/review decision; this is not field performance or government acceptance.

7 health checks

7 complete contracts + 42 missing-field fixtures = 49 cases

12 scenario contracts

12 complete contracts + 84 missing-field fixtures = 96 cases

15 project contracts

15 complete contracts + 150 missing-field fixtures = 165 cases

Decision


310/310 expected matches; any missing field returns the item

Field result

0; remain null before operation and never impersonate field performance

Long-term operation and performance review

From property to industry operation, reviewed through output, use, benefit and sustainability.

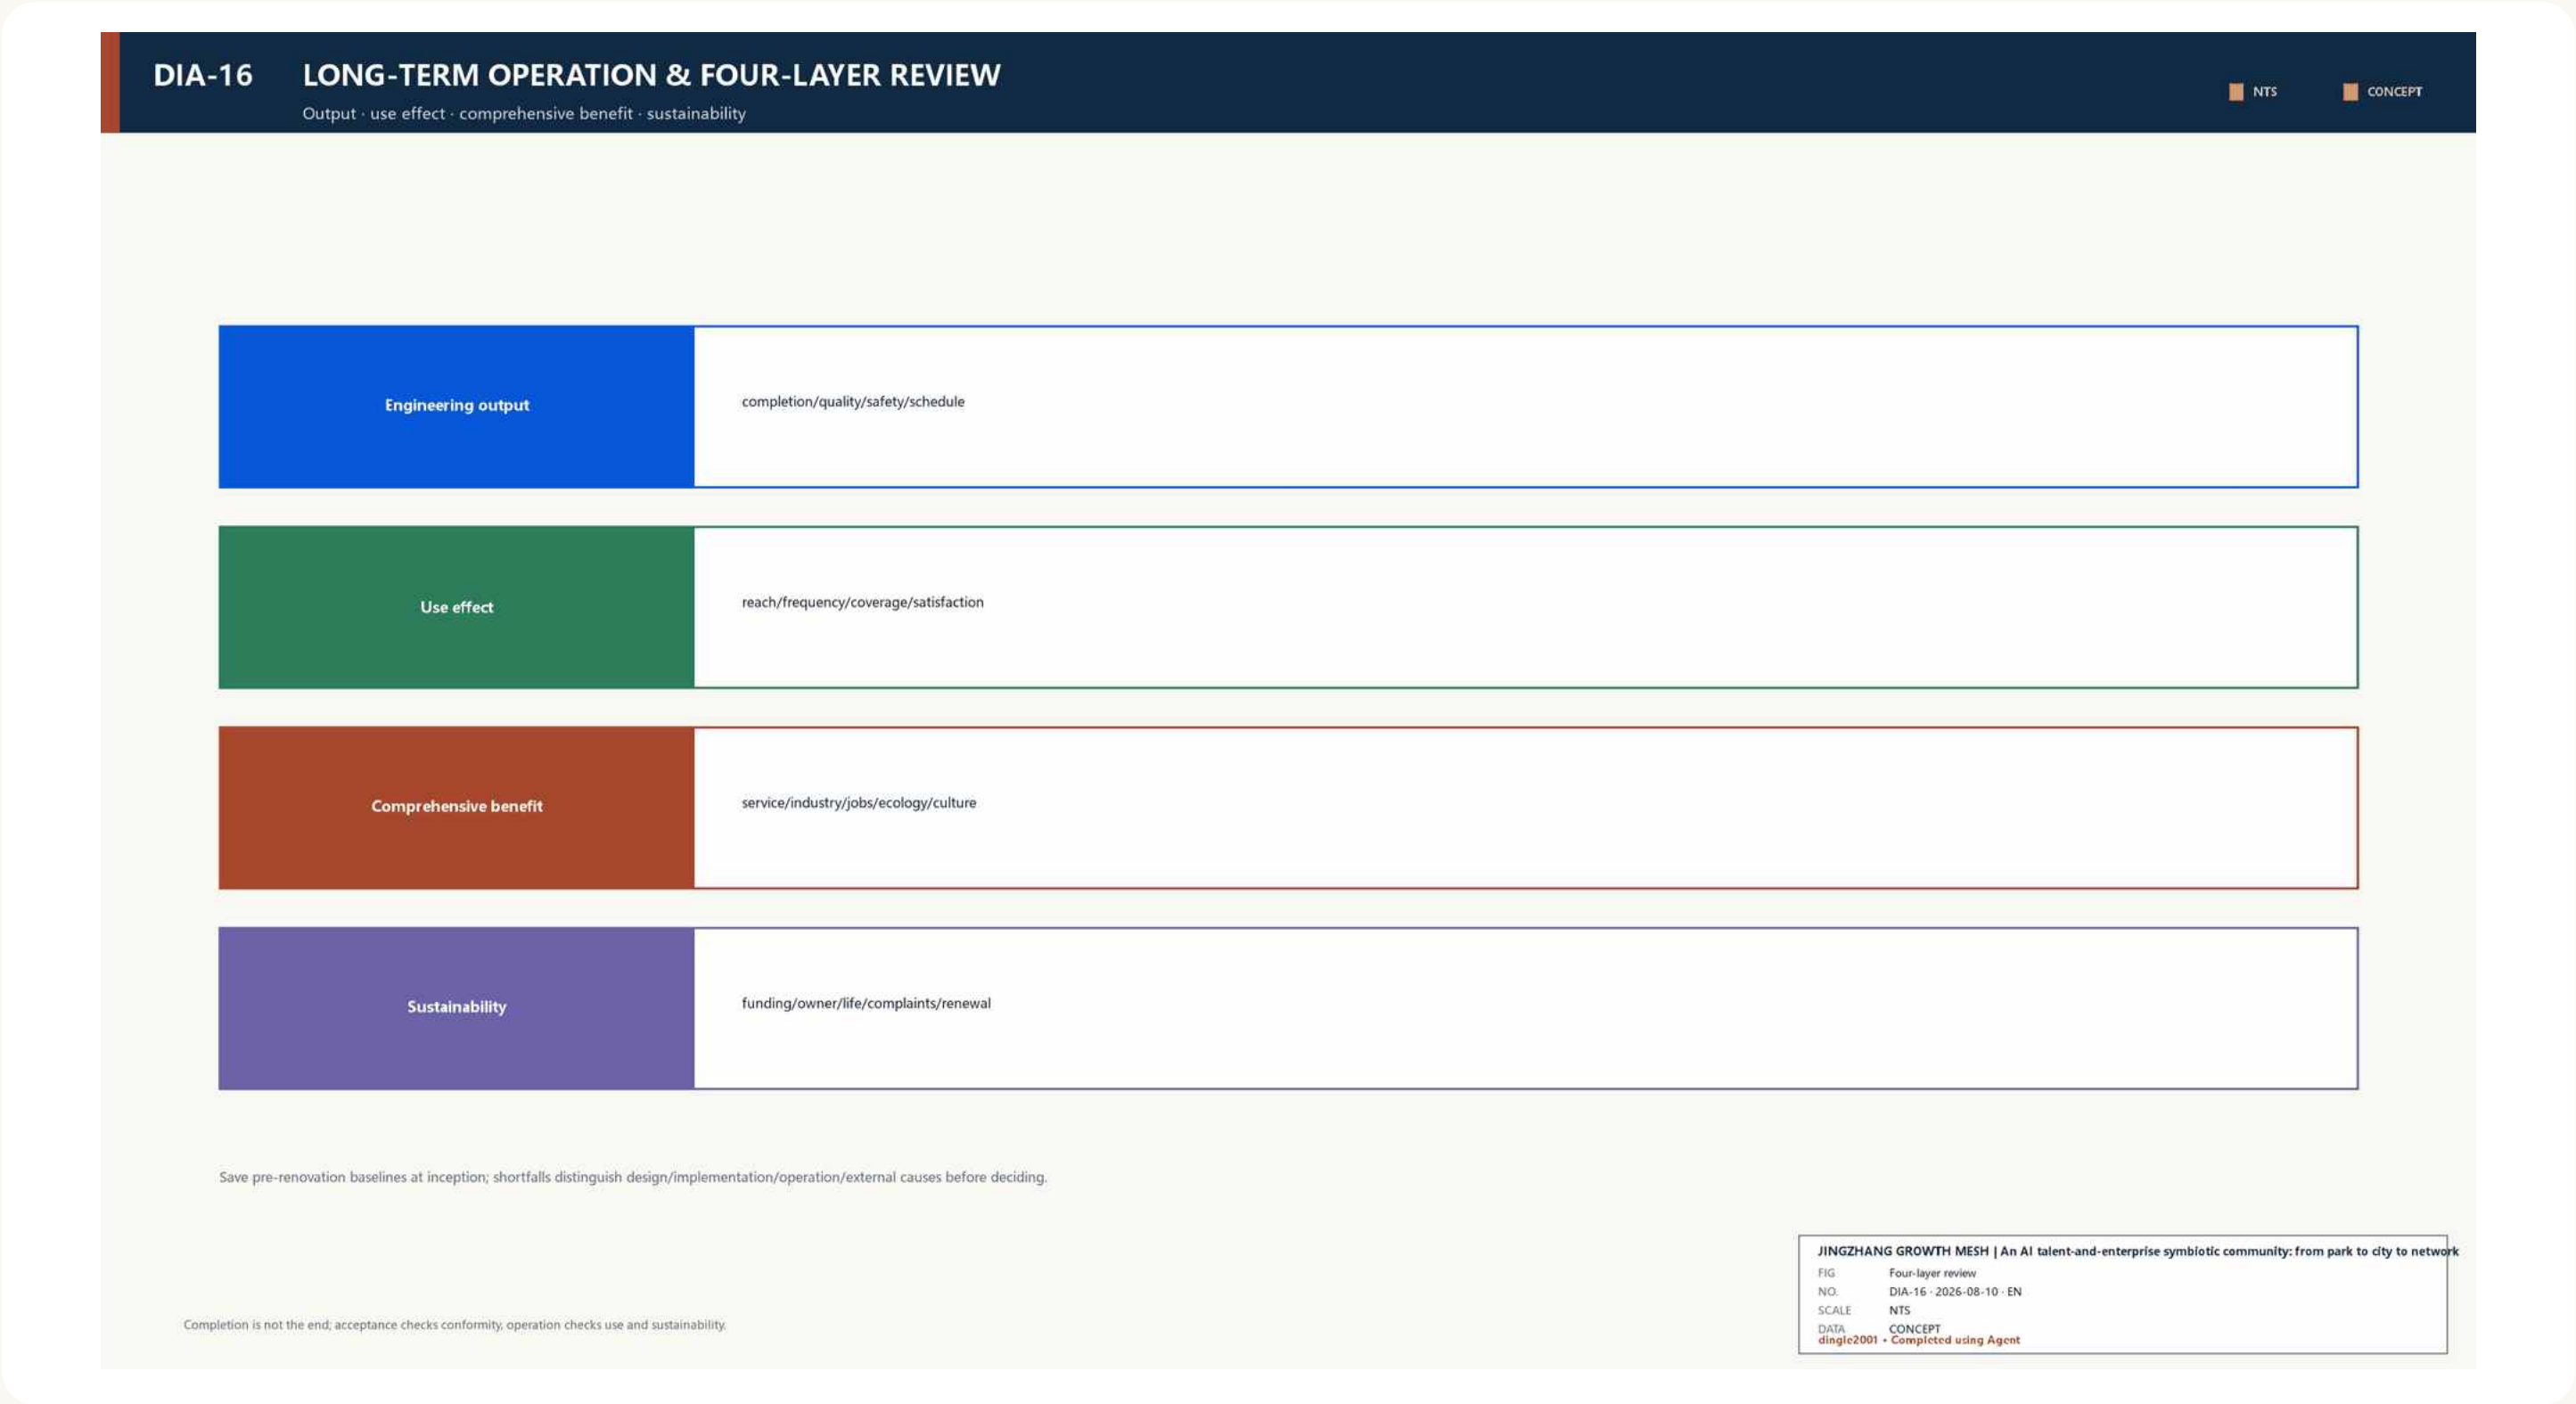

Culture I | Railway: connection

Independent engineering, problem-solving and linear connection form the narrative base.

Space

Heritage axis, component index, dates and observation edges

Rule

Survey first; no fake reconstruction or over-commercialization

Program

Engineering walks, open-source milestone and public science

Culture II | Zhongguancun: relay

From electronics street to science city, translate daring, tolerance, openness and sharing into spatial institutions.

Space	Institution
Open-source room, clinic, standards and first-order hall	Contribution record, failure review, sign-off and public return
Limit	
No individual hero or corporate logo substitutes for civic innovation culture	

No baseline, no score · named owner · acceptance evidence · continue / adjust / step back / exit

Culture III | AI: growth

Open collaboration, developer community and global knowledge networks make growth visible.

Record

Contribution, validation, first order and return evidence

Communication

Bilingual motif: From Railway to Growth Mesh

Rights

Authorize—verify—display—withdraw; no unauthorized personal data

Public-node naming and wayfinding

A memorable hierarchy follows trace—origin—growth—exchange.

Jingzhang Trace

Heritage walk, engineering marks, open-source milestone

Origin Lanes

Co-creation hall, clinic, night school, family support

Growth Gateway

First-order hall, compliance station, milestone steps, growth rings

Exchange Nodes

Wing services, accessible wayfinding and global node wall

Honor display system

Display public contribution, not commercial ratings, investment advice or unauthorized co-branding.

Open-source milestone

Licensed, reviewable contributions with public return

Global node wall

Written-confirmed nodes and withdrawable content

Enterprise growth rings

Anonymous aggregate stages of test, first order, growth and return

Process

Authorize—verify—display—annual review—withdraw

Public-space component library

Components are composable, maintainable and removable; basic access precedes spectacle.

A Access

Continuous paving, ramps, tactile and physical signs

B Stay

Seats, shade, lighting, water and charging

C Heritage

Relic cases, date index and replaceable panels

D Scenario

Closable interfaces, visible collection status and offline fallback

E Operation

Maintenance ID, owner, inspection cycle and replacement log

Annual programs and developer community

Programs serve project generation; event count and footfall never replace outcomes.

Spring | Open Validation Week

Equipment catalogue, three tests and safety review

Summer | Origin Open-source Se

Clinics, residency outcomes and intergenerational work

Autumn | First-order and Stand


Demand, validation, procurement review and standards

Winter | Jingzhang Developer W

Rail curation, bilingual exchange and annual review

International attraction and conversion

Internationalization is not eventization; it completes bilingual problems, licenses, validation and follow-up duties.

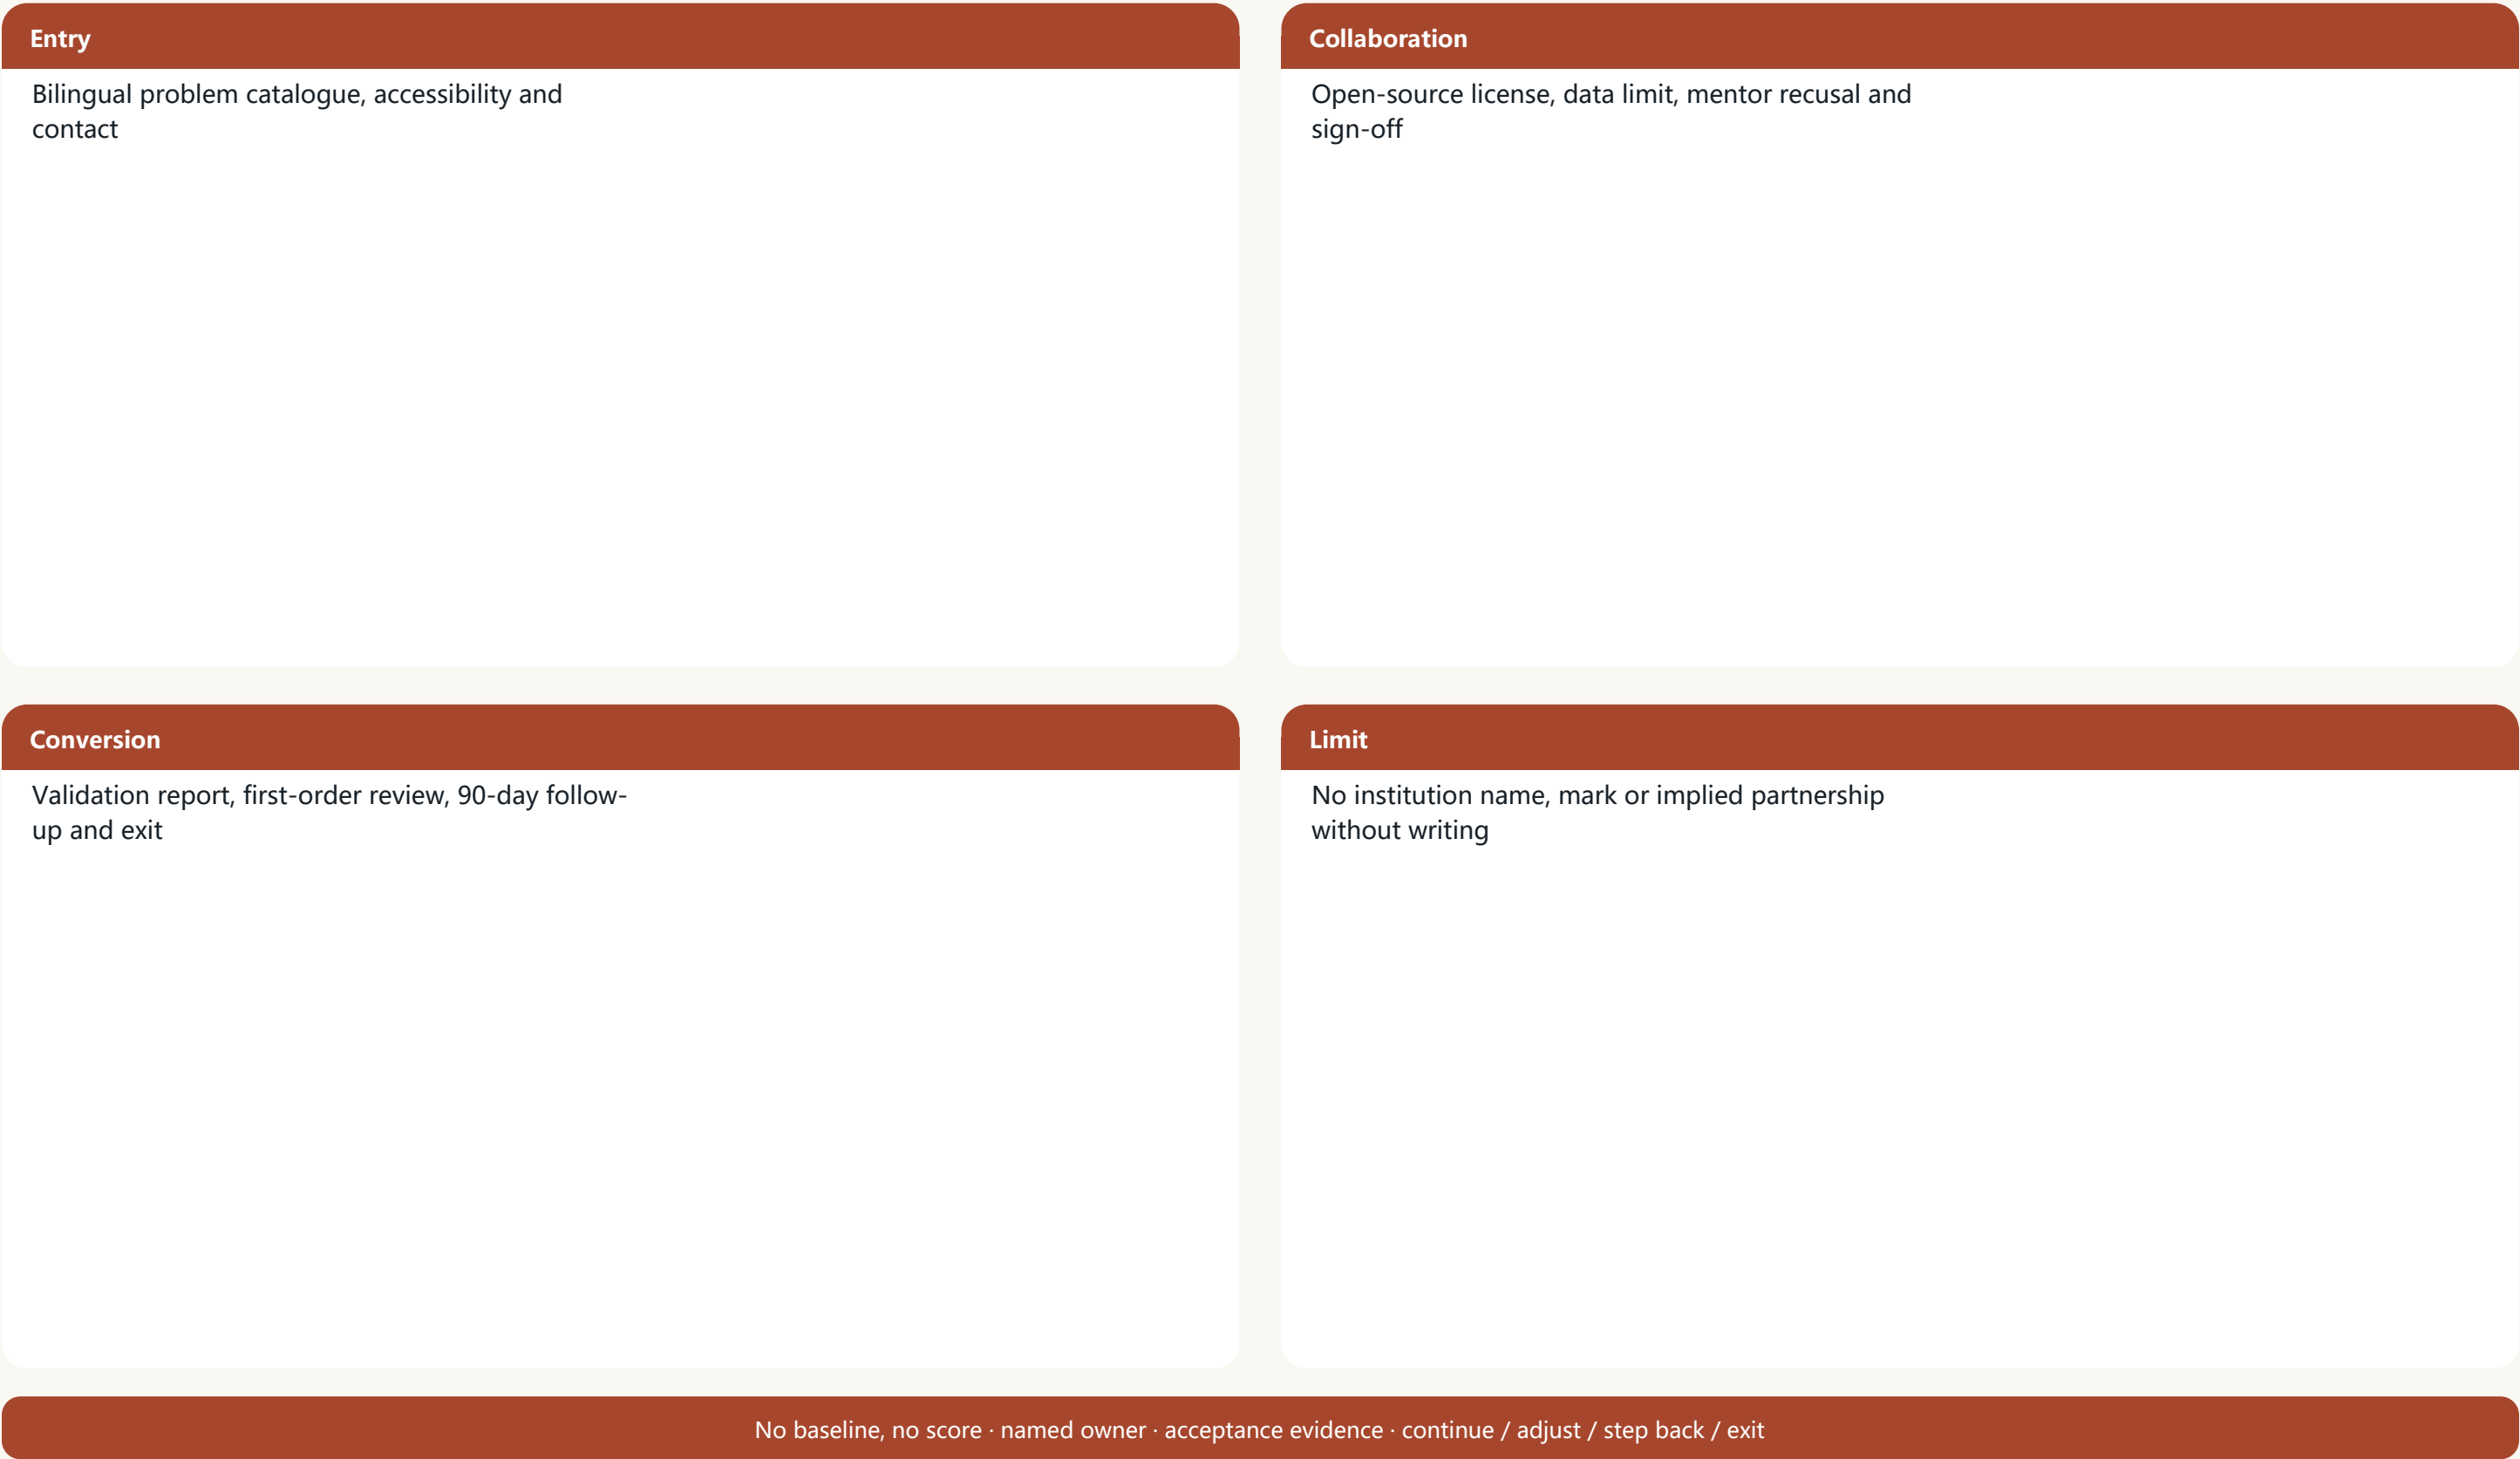


Limits, responsibility and next step

The scheme is an investigation and pilot brief, not statutory planning, construction documentation, funding commitment or government approval.

Now Replace polygons, run 7D survey, rights register, interviews and 90-day protocol	Professional sign-off Planning, architecture, structure, fire, access, traffic, cost, law and data
Do not infer Corporate participation, resource opening, investment, rent, schedule or government commitment	Review Comparable review at handover, six months, one year and three years

No baseline, no score · named owner · acceptance evidence · continue / adjust / step back / exit

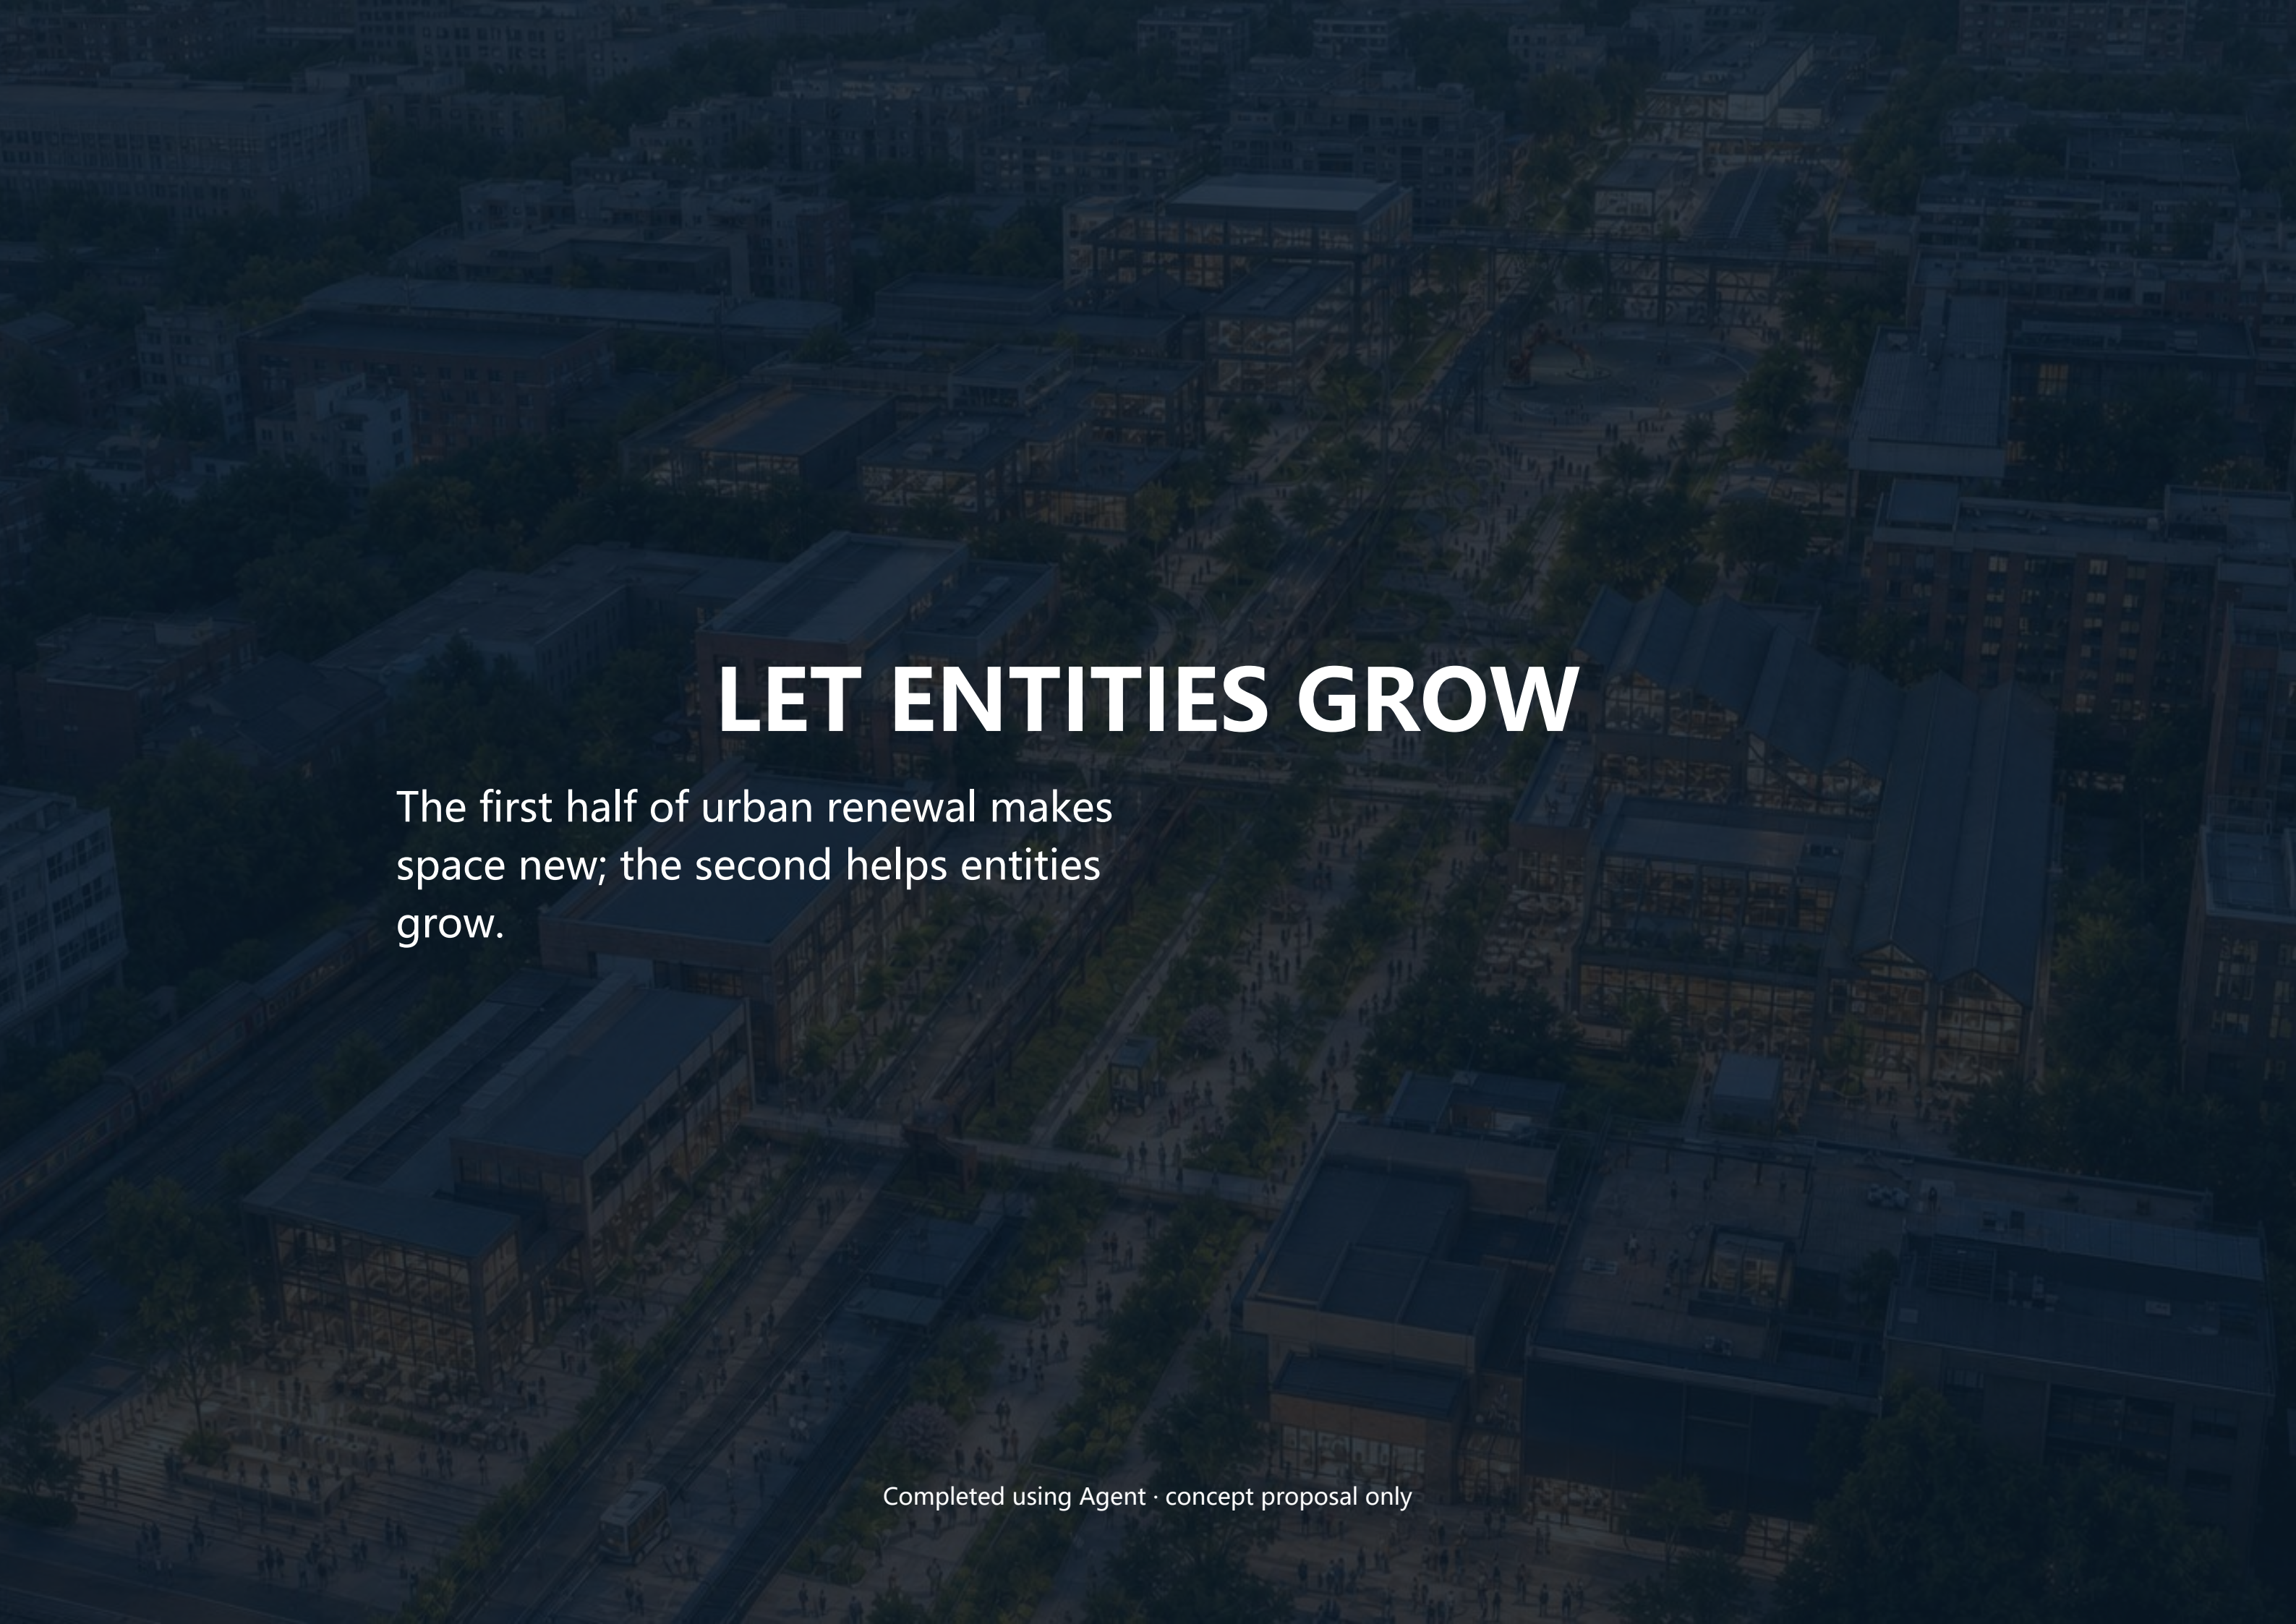An aerial, high-angle view of a city street at dusk or dawn. The street is wide and paved, with a tram visible in the lower left. On either side of the street are modern, multi-story buildings with large glass windows and flat roofs. The buildings are illuminated from within, and some have external lighting. The street is lined with trees and pedestrian walkways. In the background, more city buildings and a park area with a large circular plaza are visible. The overall atmosphere is urban and modern.

LET ENTITIES GROW

The first half of urban renewal makes space new; the second helps entities grow.

Completed using Agent · concept proposal only