

THE LEVELING LINE


JING-ZHANG AI INNOVATION BELT

The identity system and the public-space kit of parts

IDENTITY: MARK, CONSTRUCTION AND APPLICATIONS

FIG.07

a type drawing; it carries no orientation

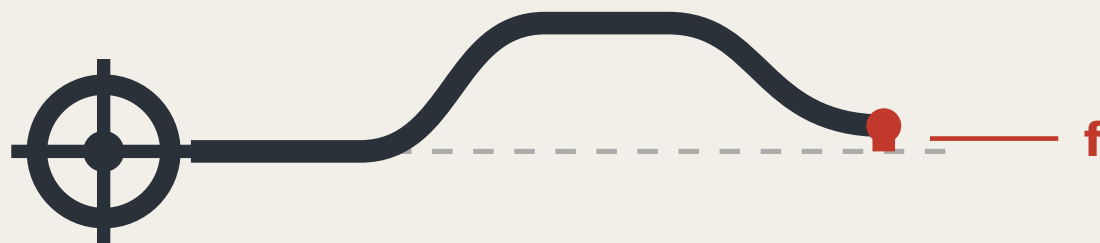


THE LEVELING LINE

THE LEVELING LINE

The mark draws the method, not decoration: the datum line departs the origin, rises, returns, and misses the datum — that red gap is the closure error.

Construction

CONSTRUCTION

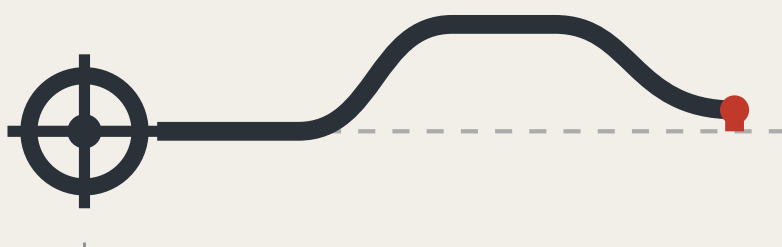

- **Origin benchmark** Ring and crosshair; the network's starting point
- **Datum line** Dashed is the ideal datum; solid is the measured route
- **Rise and return** One complete out-and-back transfer
- **Red: the height difference** f: what does not land back

Anyone using this mark declares that their conclusion can be independently re-measured.
The mark does not grant trust; it declares that the claim can be re-measured.

VARIANTS


VARIANTS



Two-colour · primary



Single-colour · etched and cast

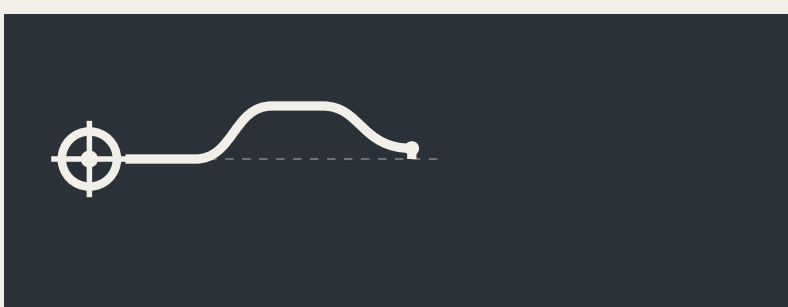

Reversed · dark ground



Minimal · below 16px

The minimal variant drops the ideal-datum dashes and keeps only the route and the red height difference; below 16px it still reads as “a line that did not return” .

APPLICATIONS

APPLICATIONS

Benchmark plaque



BM-0

Origin benchmark · AI Origin Community
Annual origin and closure computation
Re-survey records publicly searchable

Reading board · L2 closure stele

closure error f, this cycle

0.26

Tolerance F3 = 0.20

Over F

S08 AI cultural guiding · RT-N

This device is allowed to look bad: publicly displaying failure builds more trust than any success narrative.

Data interface icon




F1

Tolerance class: the mark's colour



F2

Tolerance class: the mark's colour



F3

Tolerance class: the mark's colour

Extension rule

Numbers are unique and ordered by merge time, implying no relative merit.

Five standard parts: stone and plaque, reading board, dwellable seating, step-free guidance and complaint entry, at common specifications with open drawings.

No unlicensed typefaces, images, trademarks or portraits are used.

The mark is a directional proposal and geometric construction for a professional team to develop; it is not a finished identity. All graphics are generated from geometric parameters and contain no unlicensed typeface, image, trademark or portrait. The 0.26 shown on the reading board is illustrative, not a measured result.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

LANDMARKS, KIT OF PARTS, SIGNAGE SYNTAX AND OPERATING CYCLE

FIG.09


a type drawing; it carries no orientation

Three AI pilgrimage landmarks

THREE LANDMARKS · spoken in engineering language; no spectacle

L1 The origin benchmark stone

BM-0 · AI Origin Community

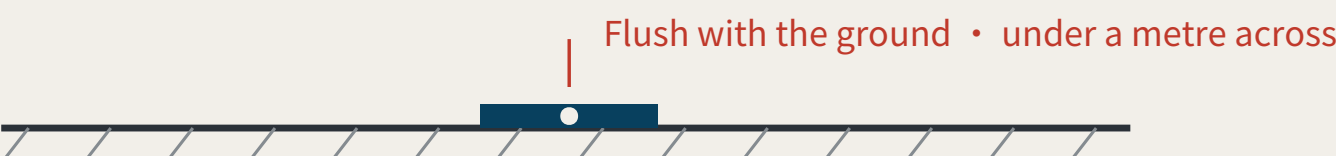

Every merged proposal's number is set into the paving — contributors' GitHub IDs are inscribed here. It is not grand. It is accurate, and must be accurate enough to be reused a century later.

L2 The closure stele

BM-1 · Zhongzhiyuan

closure error f, this cycle

0.26

Tolerance F3 = 0.20

Over F

S08 AI cultural guiding · RT-N · f=1 – consistency · illustrative

A public reading wall, updated live, showing each scenario's closure error against its tolerance. Exceedances are marked in datum red.

The value of this landmark is that it is allowed to look bad.

the L3 return-to-datum point

BM-2 · Dazhongsi



An annual civic ceremony space: the line's readings are zeroed here, tolerance revisions are read out, and scenarios returned for re-survey in the past year have their disposition explained. On ordinary days it is a public dwelling space.

Kit of parts for public space: five standard components

KIT OF PARTS · common specifications and open drawings, so any new node joins in one language



BM-301

Third-order benchmark plaque
Monthly re-survey · unique number

1 Stone and plaque

The number is position, order and cycle

Closure error f

0.14

Level, within tolerance

Next re-survey: March

2 Reading board

Visible on site; no internet needed



3 Dwellable seating

With armrests: older people rely on them to stand



4 Step-free guidance

Read by the users themselves



Scan to appeal

or phone / on-site registration

A number on receipt · reply within 5 working days

No number means not accepted, and that counts in the readings

5 Complaint entry

A non-scan method is mandatory, or the right does not exist for P4

Signage numbering syntax (agent.5)

A visitor reading the number knows which order they are standing at and how often it is re-measured

BM-0

Origin benchmark

Annual origin and closure computation

BM-1 / BM-2

First-order benchmark

Annual re-survey

BM-2x

2nd-order point

Quarterly re-survey

BM-3xx

3rd-order point

Monthly re-survey

RT-N / RT-S

Closing route

Semi-annual re-survey of the whole line

Operations are organised by re-survey cycle, not by festival calendar (agent.6)

Events are therefore governance actions, not publicity

Monthly

Community day

third order BM-301/BM-302/BM-303

P4 · P5 · P7

Quarterly

Scenario open day

second order BM-21/BM-22

P2 · P3

Semi-annual

Route re-survey

first order, routes RT-N / RT-S

P1 · P2

Annual

Zeroing ceremony

the L3 return-to-datum point

all four review parties present

Developer conversion path: take part in re-survey → propose a scenario → enter the test field → obtain closure clearance → operate

International communication uses published readings as its material, never commitments.

The f=0.26 / f=0.14 on the reading boards are illustrative, not measured results. f is always a deviation: larger is worse, and $f \leq F$ is the passing test. Landmark siting requires heritage and engineering review; this proposal does not pre-empt it. The components are a directional proposal for a professional team to develop and are not construction drawings.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

From region to site: coordination interfaces and the key areas

BOARD 2 / 6

FROM REGION TO SITE

jiangmuran · Concept advice; not a substitute for statutory planning

REGIONAL COORDINATION INTERFACES: EXTENDING THE LEVELLING NETWORK

FIG.11

a type drawing; it carries no orientation

An executable form of coordination: how two levelling networks join

AN EXECUTABLE FORM OF COORDINATION: HOW TWO LEVELLING NETWORKS JOIN



A joint observation produces a number, not an intention:

Each network reads the same public question set; the difference is the cross-network closure error. Within a jointly agreed tolerance, the two networks' records may be mutually recognised; over it, each re-surveys, and no declaration of partnership substitutes for a reading.

Nobody gives up authority: a joint observation asks only that conventions be comparable, not that organisations merge.

What each of the five partners exchanges, and what it does not

Partner	Stage	Exchanges	Explicitly does not exchange	Precondition for the interface
BDA (Yizhuang)	Volume production and high-level AV road testing	Mutual recognition of closure records across complementary speed domains	Not one admission: an F1 pass here admits a device to pedestrian density, not to a carriageway, and the reverse also holds	Both parties confirm the speed-domain split and test protocols
Future Science City	Corporate research institutes and engineering	Scenario demand and real user density	No claim on IP; no scheduling on anyone's behalf	Wing benchmarks built and a first baseline taken
Huairou Science City	Large facilities and basic research	The measurement method itself: how f is defined, cycle length, the statistics behind revising F	No scenario data is exchanged; the coordination is methodological, not applied	The closure convention published and open to methodological review
Beiwei Community	The innovation community the taskbook names	Reciprocal joint points; exchanged review parties	This proposal does not know its positioning and does not set its benchmark order	Each party names at least one publicly reachable joint point
Beijing-Tianjin-Hebei	Cross-provincial coordination	Cross-provincial recognition of the tolerance convention	No direct recognition of records; without a shared convention they are not comparable	Tolerance definition and revision procedure agreed across provinces

None of the five rows has been confirmed by the party named.

No internal plans are known, nobody is committed, no agreement is assumed; each row is an interface to evaluate independently.

Each partner's stage is described from publicly available general positioning and is unconfirmed by them. The speed-domain relationship in the first row must be settled against both parties' actual test protocols. This sheet proposes interfaces; it commits nobody and is no government determination.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning


Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THREE AREAS, TWO WINGS AND BENCHMARK LAYOUT

FIG.04

orientation is noted on each drawing

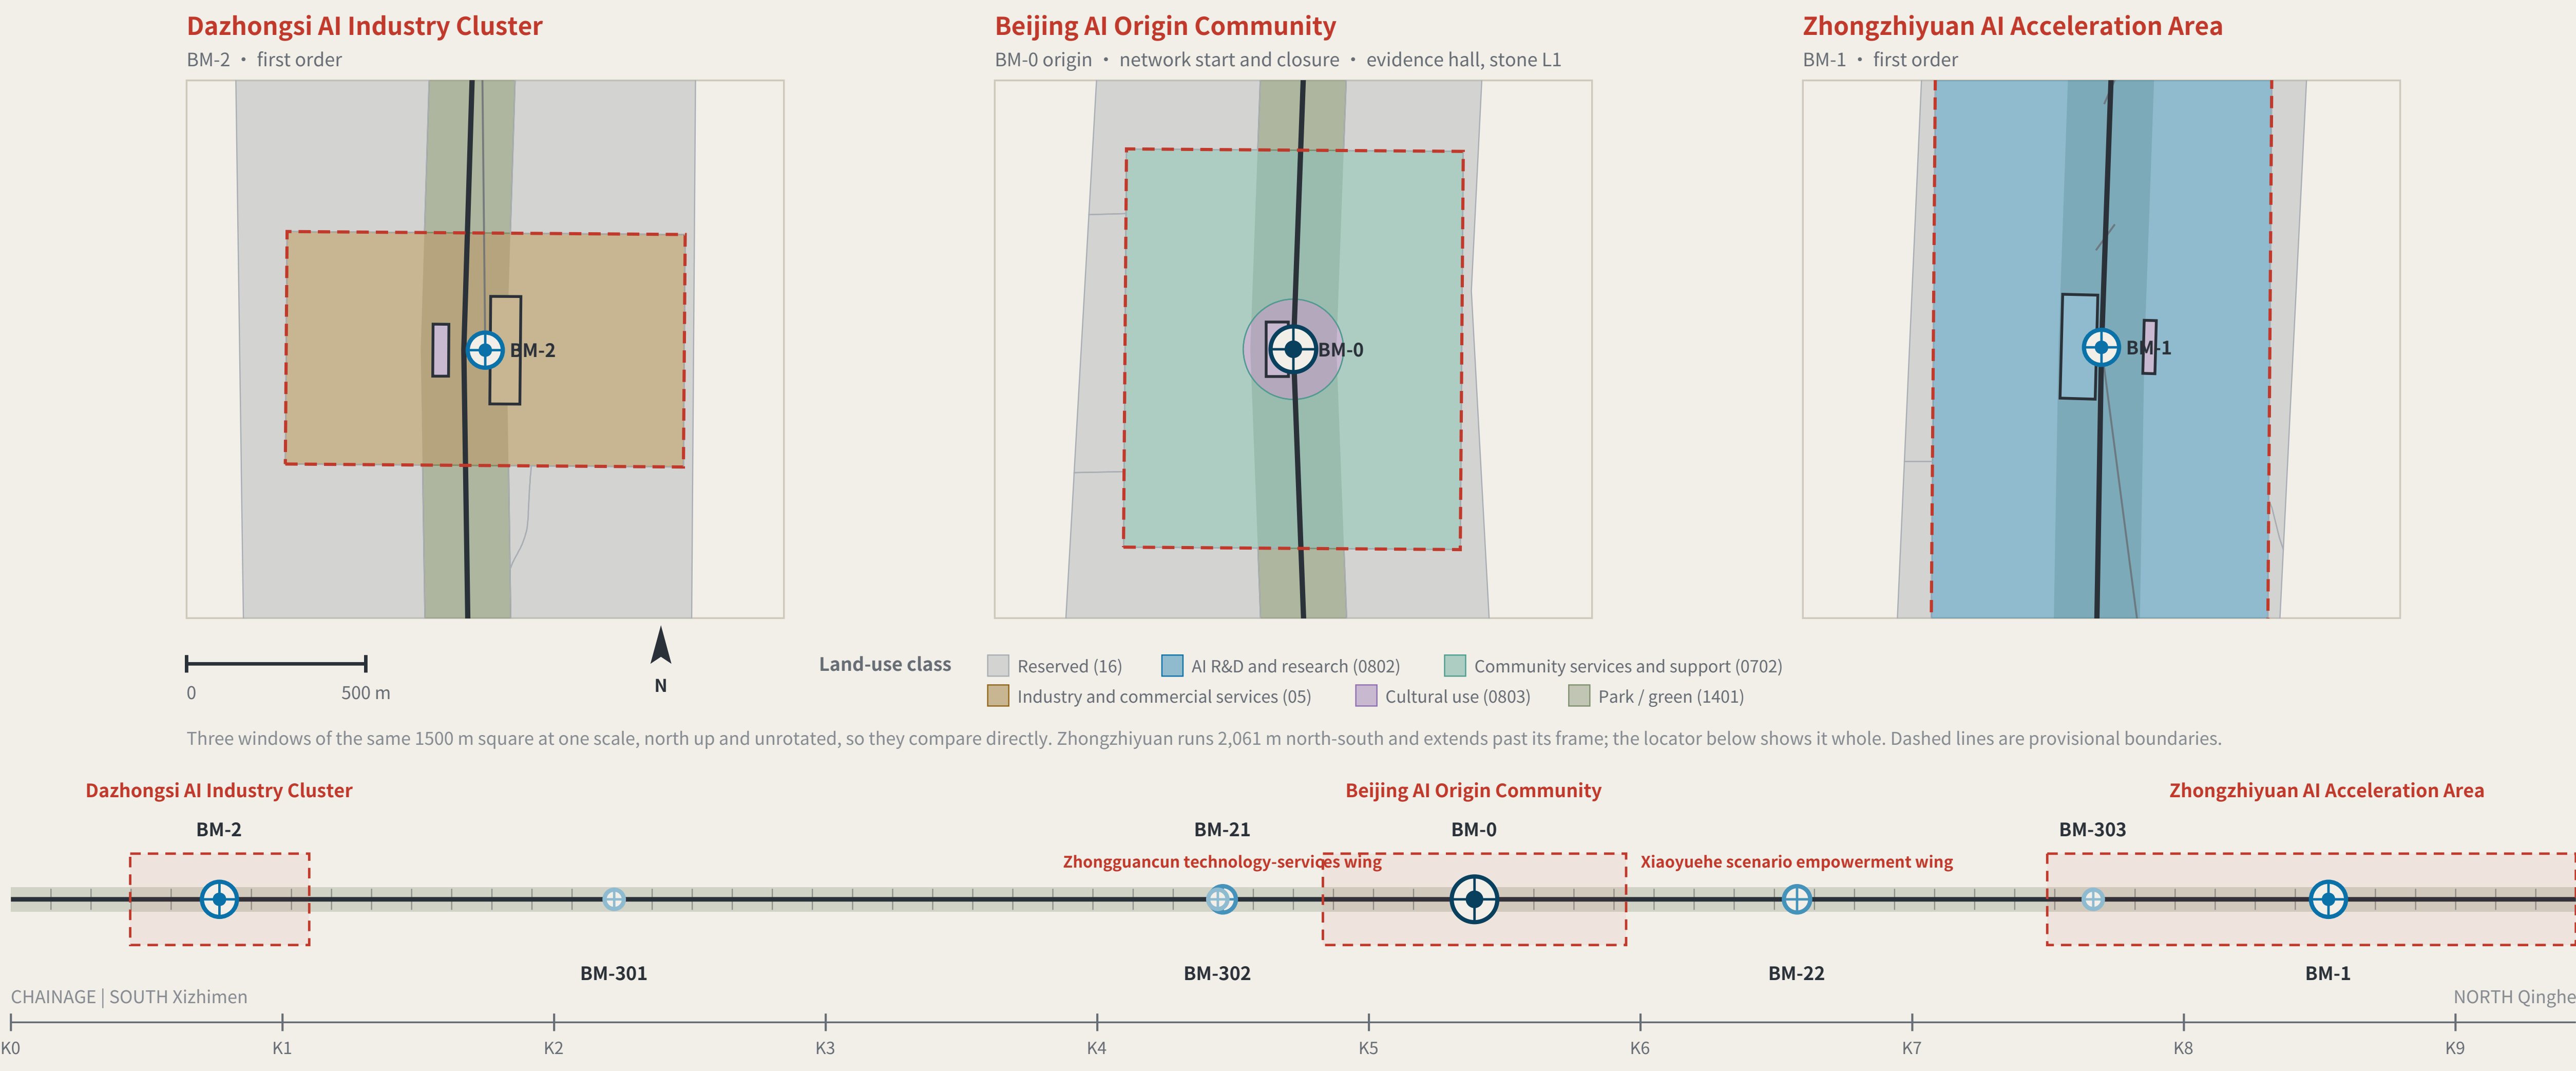

SLOW MOBILITY, BLUE-GREEN AND CONNECTING ROUTES

FIG.05



East-west stitching points (11)

EAST-WEST STITCHING POINTS

The class rests on one measurable fact: whether OSM already maps a crossing within 60 m of the intersection. If it does, Class A. If it does not, the need is registered and left ungraded — separating Class B (channelisation) from Class C (new structure) is a traffic study's conclusion, not this proposal's.

Yinquan Rd	Class A	10 m	Xueyuan South Rd	Class A	25 m	N 4th Ring Rd Middle	Class A	30 m	N 3rd Ring Rd	Class A	33 m
Beitucheng West Rd	need registered only	65 m	Xizhimen North St	need registered only	68 m	Tsinghua East Rd	need registered only	86 m	Shibanfang South Rd	need registered only	146 m
G6 service road	need registered only	166 m	G6 service road	need registered only	175 m	Zhixin Rd	need registered only	201 m			

Distances are to the nearest mapped crossing. OSM is crowd-sourced: "need registered only" means OSM shows none, not that none exists on the ground.

The two connecting routes

CONNECTING ROUTES

- North connecting route RT-N**
BM-0 → BM-303 → BM-22 → BM-1 (terminates at a first-order point; the computation closes at BM-0)
- South connecting route RT-S**
BM-0 → BM-302 → BM-21 → BM-301 → BM-2 (terminates at a first-order point; the computation closes at BM-0)

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted.
Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

Spine	A continuous walkable public axis; walking and cycling take priority	9,443 m
Green corridor	Buffered both sides of the spine, forming a continuous blue-green interface	120 m each side
Station = benchmark	Rail concourses double as third-order benchmarks; re-survey where footfall is densest	3
Universal first	Step-free access, lighting, drainage and shade come before any smart facility	Precondition

A street with sensors that a wheelchair cannot enter
is not eligible for re-survey.

Tolerance classes

TOLERANCE CLASSES

F1	strictest	Bodily safety or administrative acts	S04 · S06 · S10 · S11
F2	Medium	Individual rights	S02 · S03 · S05 · S09 · S12
F3	loosest	Information only	S01 · S07 · S08


Layers: geometry/roads.geojson, green_space.geojson, public_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment.
THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning
Data to 2026-08-10 (sources.json; 1 not obtained)
Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

THE BENCHMARK ON THE STREET AND HOW THE KERB IS SHARED

FIG.10

What a benchmark looks like at eye level


A BENCHMARK AT EYE LEVEL · third-order BM-301 · elevation 1 m = 138 units

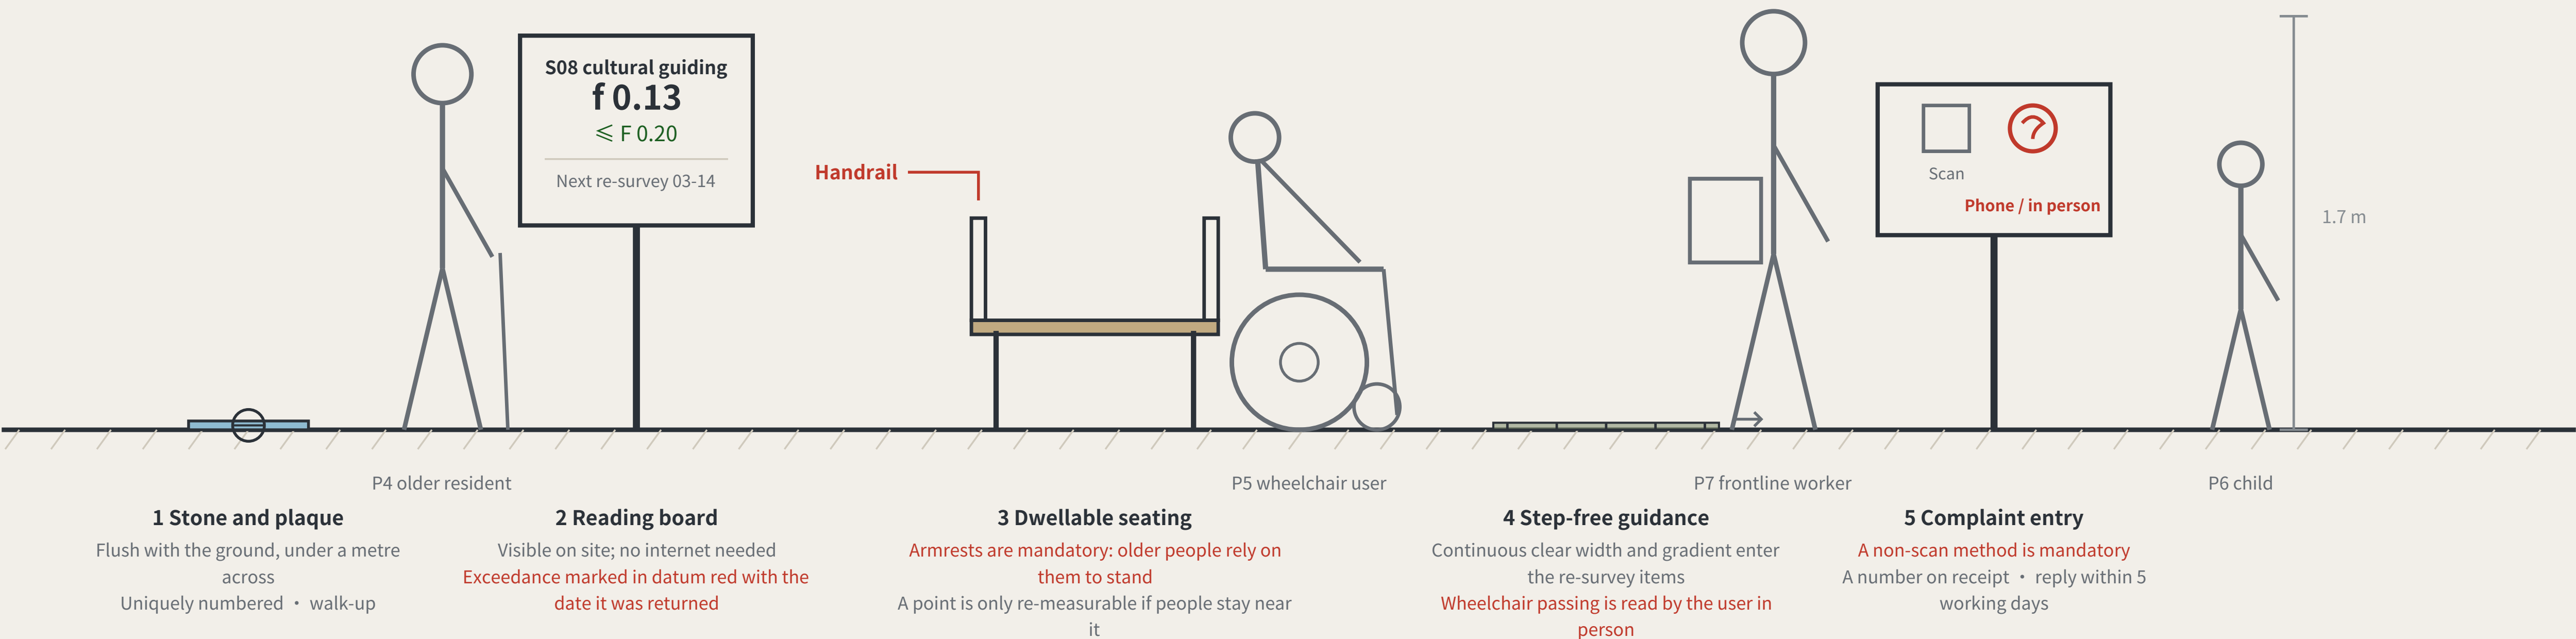

Two of the five standard components are hard constraints: seating must have armrests, and the complaint entry must offer a non-scan method. A rule you cannot see in the drawing is a rule the drawing does not contain.


Kerb allocation in priority order

KERB ALLOCATION IN PRIORITY ORDER · sequence and precedence only, no widths

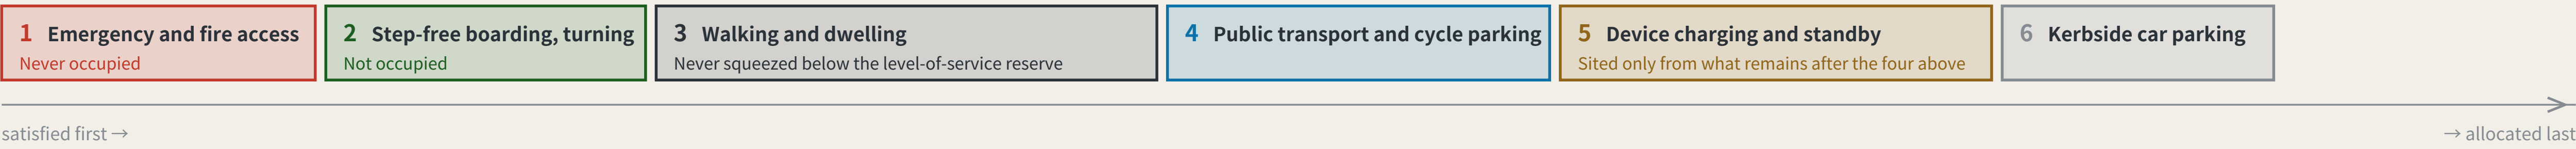

The order is itself a position: device charging sits behind pedestrians and accessibility, which means introducing devices must not be paid for with degraded walking conditions. Winter snow storage must be reserved at this stage alongside the device and pedestrian lanes — piled on the device lane the devices stop; piled on the pedestrian lane people are pushed toward the carriageway, which is worse.

The elevation is drawn at 1 m = 138 units. The figures are a scale reference and a statement about who is present, not a rendering. The section expresses sequence and precedence only and carries no widths — capacity must be computed on site from measured clear width, and a figure not derived from measurement is fabricated certainty. Component specifications are in geometry/public_space.geojson and the scenario cards; positions await official boundaries and title verification.
THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning
Data to 2026-08-10 (sources.json; 1 not obtained)
Plan EPSG:4548/4326 · heights relative; the 1985 national datum is not used

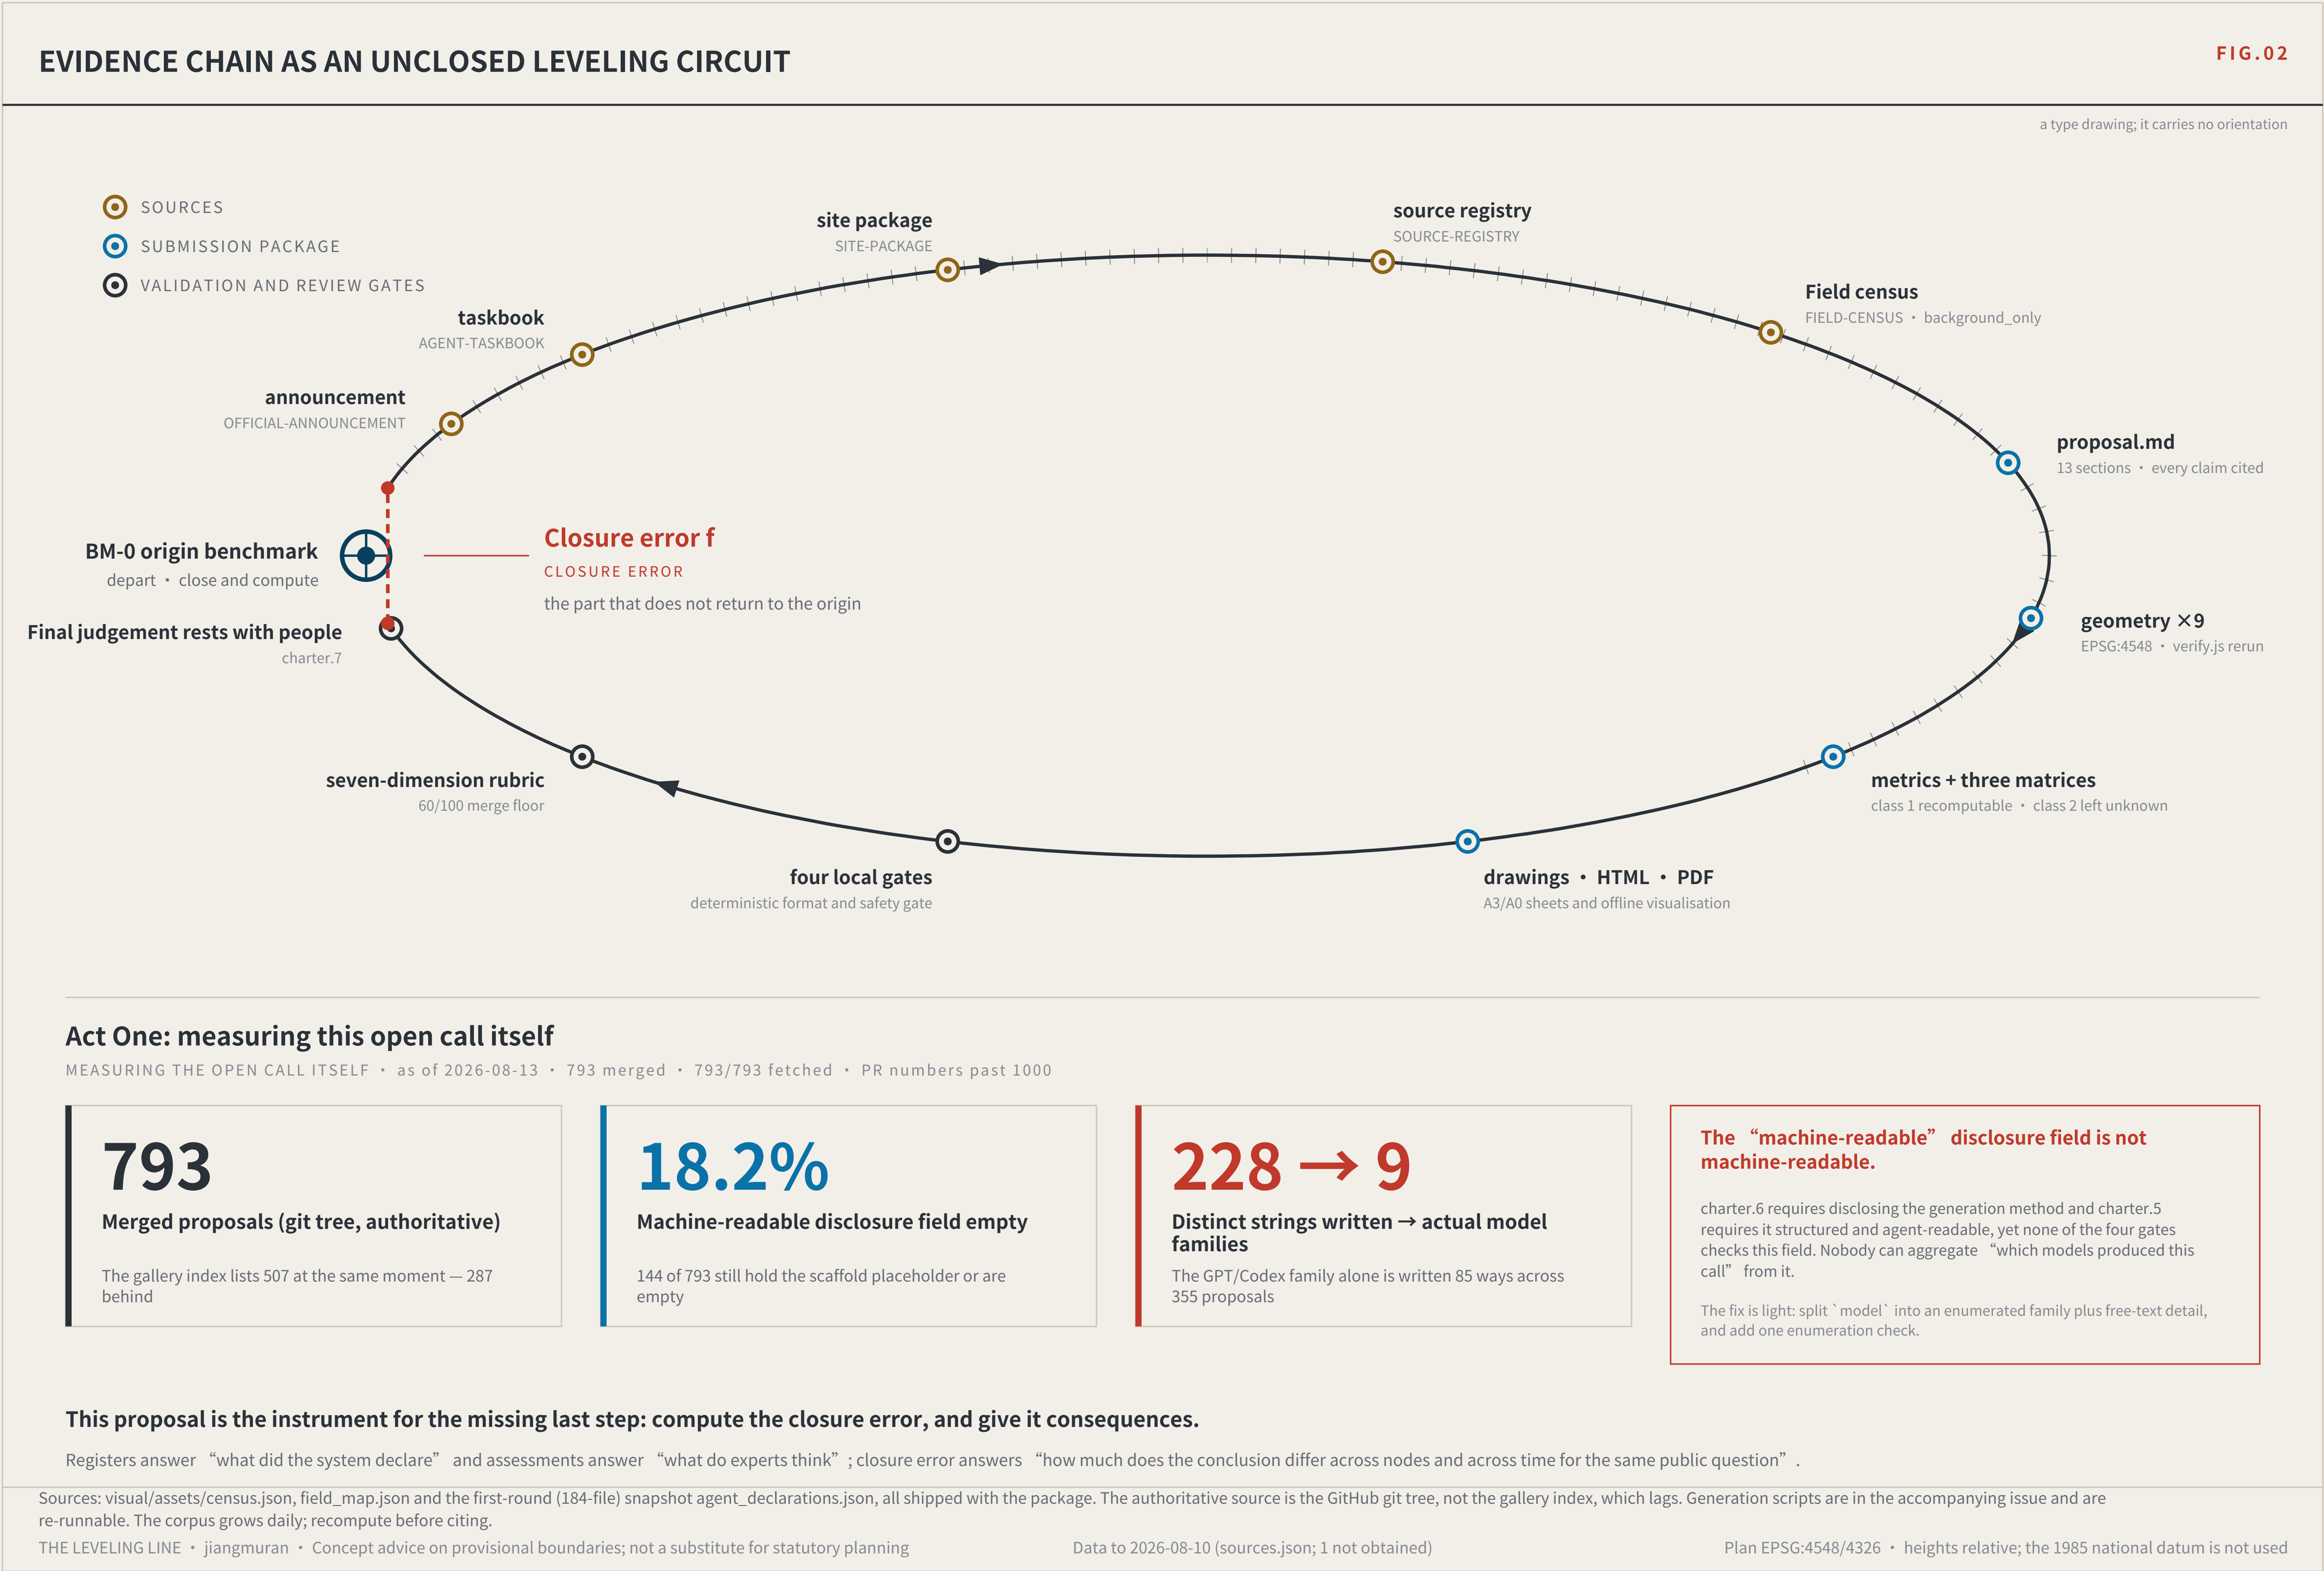

JING-ZHANG AI INNOVATION BELT

BOARD 5 / 6

SCOPE AND ECOSYSTEM

jiangmuran • Concept advice; not a substitute for statutory planning

FIG.03



Layers: brief/site-package/geometry/provisional_boundaries.geojson, geometry/roads.geojson, public_space.geojson, land_use.geojson, phasing.geojson. Drawn by the accompanying scripts and recomputable (scripts in the accompanying issue). The three areas are taken from the announcement text; the geometry is a provisional substitute.

THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning

SCOPE LEVELS AND NETWORK TIERS

The three levels are not three unrelated drawing sets

The research area decides what to measure.

The design area decides which route to measure along.

The key areas decide where to set the stones.

BENCHMARK ORDERS

LAND-USE PARTITION

22 features • 7 classes • no overlap, no gap (verified point by point)

Reserved land at 55.4% is a judgement, not a gap: tenure, plan and retain/demolish status are unpublished; this proposal does not subdivide for them.

Values this proposal deliberately does not give

Floor area ratio • building height • density • setbacks • road redlines

Statutory regulatory-plan controls. Publishing a figure with the official data absent would manufacture certainty; metrics.json keeps them unknown.

FIG.08

a type drawing; it carries no orientation

ELEMENTS AND THEIR CHAIN OF CUSTODY

Every element answers the same three questions: which space carries it, which benchmark holds its reading, and what gets re-measured.

The funding row has no re-survey item. That is a judgement, not an omission.

Investment arrangements are decisions for market actors; an urban design proposal must not turn them into governance metrics, still less into fiscal commitments.

Writing what is not yours to govern into a metric system is its own kind of overreach.

SIX CASES, ONE QUESTION: WHAT MAKES ITS TRUST RE-MEASURABLE?

All six point at the same gap: they register and they assess, but none institutionalises returning to the origin and computing.

A register says what a system declared; an assessment says what experts think. Neither answers how much the conclusion differs when the same public question passes through different nodes at different times.

Case material is drawn from public institutional documents and public reporting. Mechanisms only are cited: no text or images copied, no marks used, no non-public data, and no fabricated company lists, investment figures or output values. Element-to-space correspondence is in `geometry/land_use.geojson` and `public_space.geojson`.

THE LEVELING LINE • jiangmuran • Concept advice on provisional boundaries; not a substitute for statutory planning

Data to 2026-08-10 (sources.json; 1 not obtained)

Plan EPSG:4548/4326 • heights relative; the 1985 national datum is not used

All linework is drawn from the submitted GeoJSON and recomputed in EPSG:4548. The generating scripts cannot ship (intake takes no .py); what a reader can re-run is `verify.js`. Recomputed as a whole when official polygons are published.

A0 BOARD

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT


The kit of parts, and the overall concept

THE LEVELING LINE

THE LEVELING LINE

A city that publishes its own error.

A city that publishes its own error.

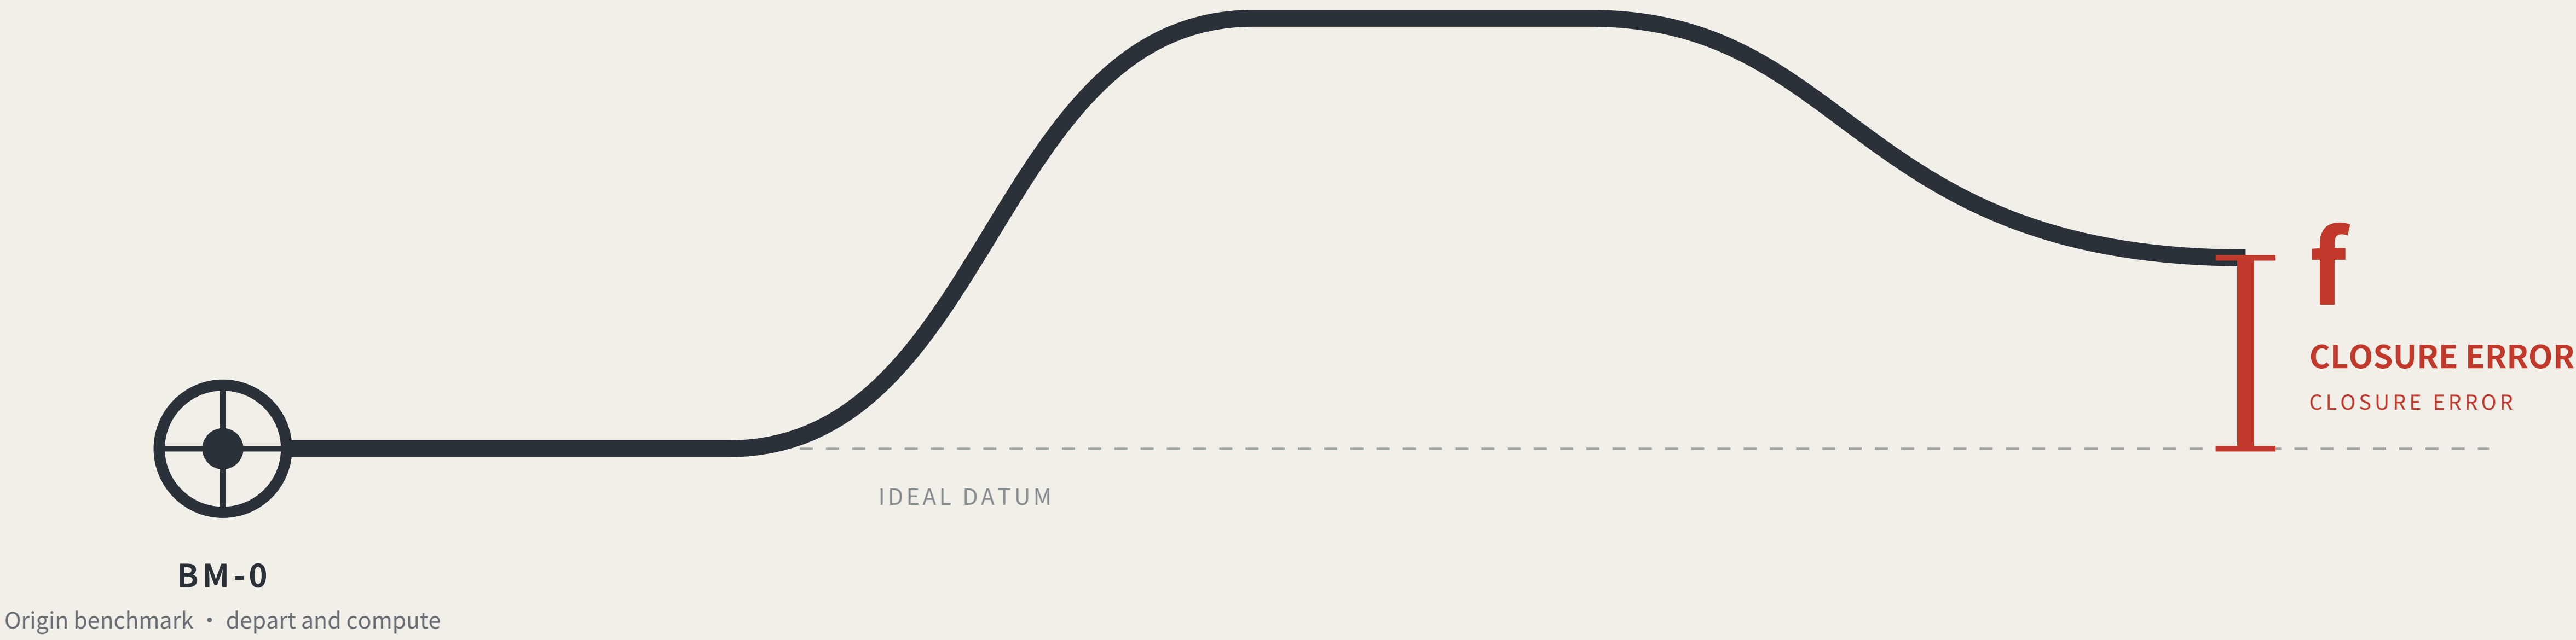


Leveling is not about measuring accurately. It is about measuring back.

Depart from the origin, carry the height station by station, run the circuit and return — the part that does not land back on the datum is the closure error.

Within tolerance every station is accepted; over tolerance the whole run is void and re-measured, and no single station may be patched.

This proposal applies that hundred-year-old rule where a wrong reading injures someone: low-speed robots and AI public services.

OVERALL CONCEPT AND SITE OVERVIEW

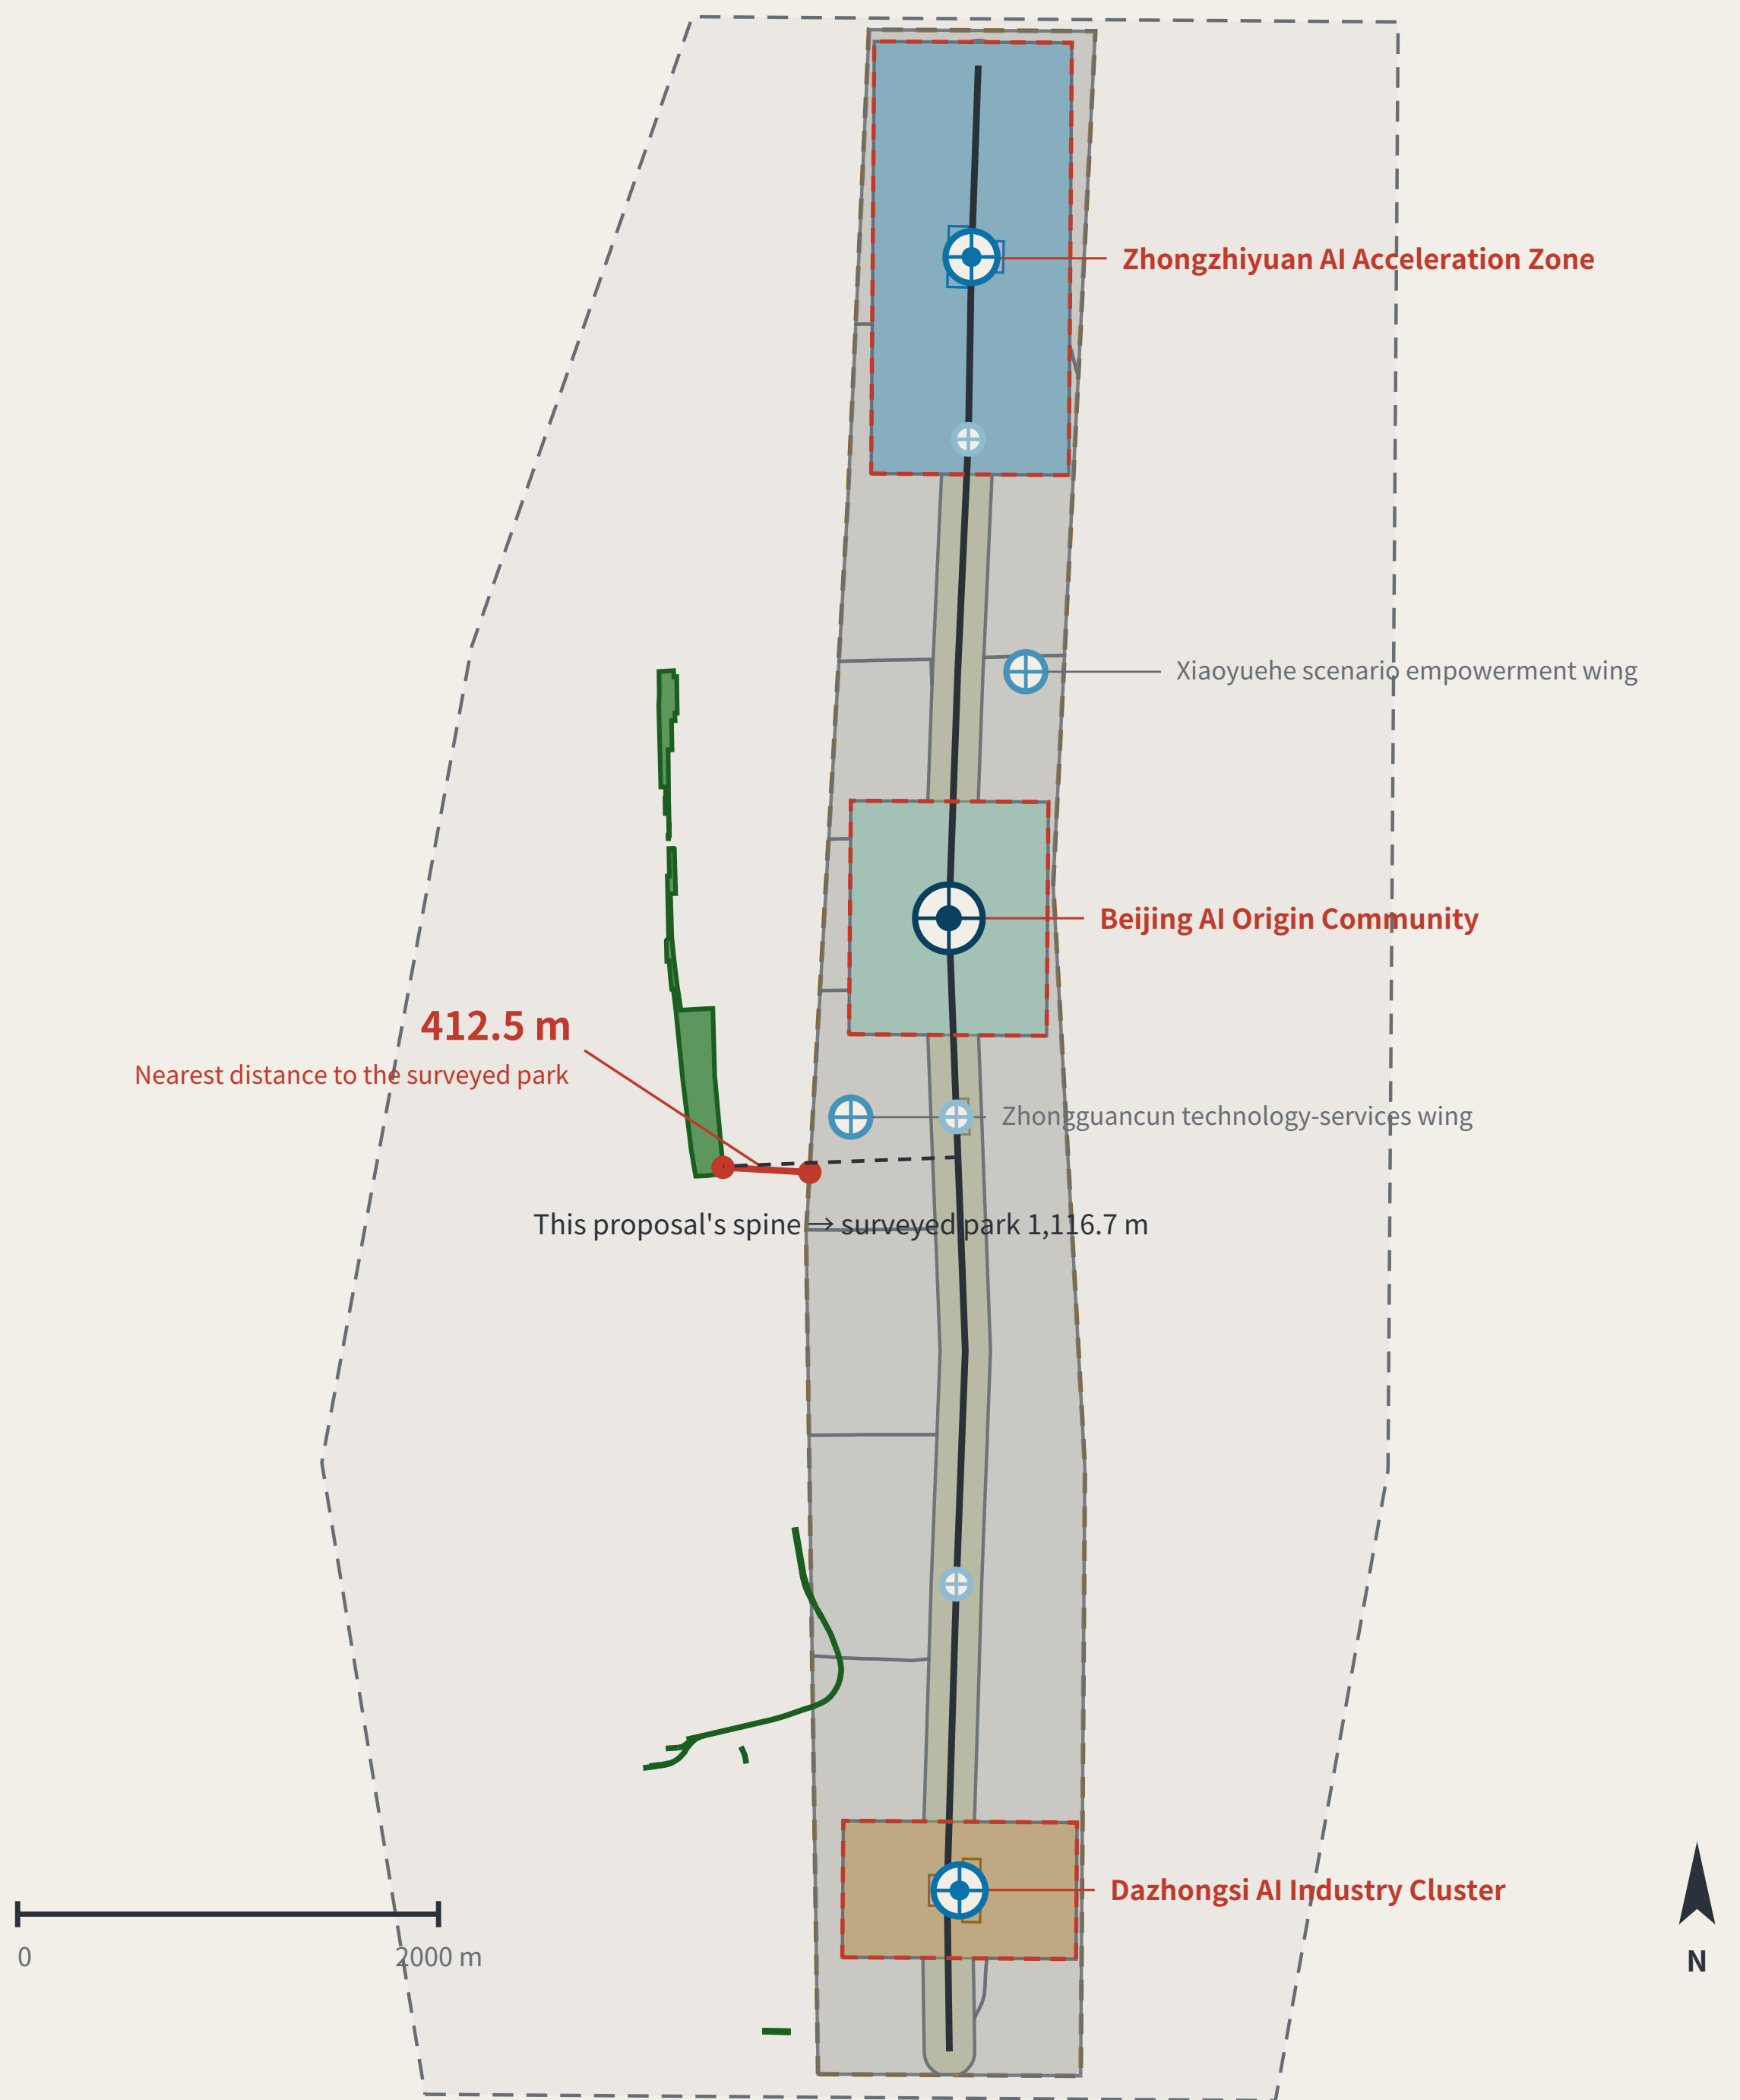

Legend and how to read it

LEGEND · surveyed data and inferred boundaries are shown separately

Surveyed (independently checkable)

- Jing-Zhang Railway Heritage Park (OSM survey, 17.49 ha)
- Disused railway (14 segments, 3,028 m)

Inferred (not usable as a redline)

- Coordinated research area 43.6 km²
- Overall design area 11.4 km²

This proposal's design (generated against inferred boundaries)

Blank-block edges follow the existing arterials; they are not a parcel subdivision or an ownership boundary

- Cultural use (0803)
- AI R&D and research (0802)
- Community services and support (0702)
- Industry and commercial services (05)
- Park / green (1401)
- Urban road land (1207)
- Left blank by this proposal (code 16)
- Spine (design centreline)
- Tiered benchmarks

The line to read on this sheet is the red one.

Research area and surveyed park agree 100%, so the announced bounds do not conflict with actual geography; the discrepancy is confined to the overall design area. This proposal's spine is displaced with it. Marked here rather than hidden.

What the belt does

WHAT THE BELT DOES · the five functions are five positions on one loop

Set the tolerance	Depart	Take the readings	Close at the origin	Over tolerance: re-survey
BM-1 Zhongzhiyuan	BM-0 Origin Community	BM-2 Dazhongsi, the wings	BM-0	the whole route returns
Over tolerance the whole route returns for re-survey and drops to the non-AI equivalent - the loop does not close, and the belt does not run.				
9.4 km		11.4 km²	8	
Spine length		Overall design area	Tiered benchmarks (origin, first, second, third order)	

Site cross-check (the red line at left):

The surveyed park is 17.49 ha; it agrees 100% with the coordinated research area and intersects the provisional overall design area 0%, nearest distance 412.5 m. The same instrument measured this proposal too: the submitted spine is 1116.7 m from the surveyed park, because it was generated against the provisional boundary. A recomputability standard invoked only when it flatters the author is not a standard.